

Inductors

Epoxy Conformal Coated, Axial Leaded



FEATURES

- Axial lead type, small lightweight design
- Special magnetic core structure contributes to high Q and self-resonant frequencies
- Treated with epoxy resin coating for humidity resistance to ensure long life
- Heat resistant adhesives and special structural design for effective open circuit measurement


RoHS
COMPLIANT

STANDARD ELECTRICAL SPECIFICATIONS

IND. AT 1 kHz (μH)	TOL.	Q MIN.	TEST FREQ. (MHz)	DCR MAX. (Ohms)	SRF MIN. (MHz)	RATED DC CURRENT (mA)
1000	± 5 %, ± 10 %	80	2.52	8	1.7	200
1200	± 5 %, ± 10 %	80	2.52	9	1.5	180
1500	± 5 %, ± 10 %	80	2.52	10	1.4	160
1800	± 5 %, ± 10 %	80	2.52	11	1.3	150
2200	± 5 %, ± 10 %	80	2.52	14	1.2	120
2700	± 5 %, ± 10 %	80	2.52	18	1.0	110
3300	± 5 %, ± 10 %	80	2.52	22	0.9	105
3900	± 5 %, ± 10 %	80	2.52	26	0.8	100
4700	± 5 %, ± 10 %	80	2.52	30	0.7	95
5600	± 5 %, ± 10 %	60	2.52	34	0.7	80
6800	± 5 %, ± 10 %	60	2.52	48	0.5	75
8200	± 5 %, ± 10 %	60	2.52	62	0.5	70
10000	± 5 %, ± 10 %	60	2.52	74	0.5	65
12000	± 5 %, ± 10 %	50	2.52	88	0.4	60
15000	± 5 %, ± 10 %	50	2.52	102	0.4	55
18000	± 5 %, ± 10 %	40	0.0796	150	0.3	50
22000	± 5 %, ± 10 %	40	0.0796	180	0.3	45
27000	± 5 %, ± 10 %	40	0.0796	210	0.3	40
30000	± 5 %, ± 10 %	40	0.0796	240	0.3	35
33000	± 5 %, ± 10 %	40	0.0796	250	0.2	30
39000	± 5 %, ± 10 %	40	0.0796	270	0.2	25

ELECTRICAL SPECIFICATIONS

Inductance Range: 1000 μH to 39000 μH

Inductance Tolerance: ± 10 % standard, ± 5 % optional

Operating Temperature Range: - 20 °C to + 105 °C

Dielectric Strength: 250 VRMS

MECHANICAL SPECIFICATIONS

Terminal Strength: Pull = 5 pounds, Twist = 360° x 3


Protection: Epoxy uniform roll coated

Leads: Tinned copper

ENVIRONMENTAL SPECIFICATIONS

Maximum Temperature Rise: + 20 °C

DIMENSIONS in inches [millimeters]

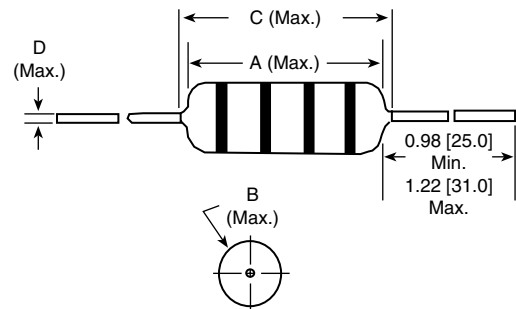

MODEL	A (Max.)	B (Max.)	C (Max.)	D (Max.)
IRF-46	0.236 [6.0]	0.197 [5.0]	0.551 [14.0]	0.026 [0.65]

DESCRIPTION

IRF-46	15000 μH	± 10 %	ER	e3
MODEL	INDUCTANCE VALUE	INDUCTANCE TOLERANCE	PACKAGE CODE	JEDEC LEAD (Pb)-FREE STANDARD

GLOBAL PART NUMBER INFORMATION

I R F	4 6	E R	1 5 3	K
PRODUCT FAMILY	SIZE	PACKAGE CODE	INDUCTANCE VALUE	TOL.



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.