

MOTOR CAPACITOR-CBB60

Suntan®

ELECTRICAL APPARATUE USE METALLIZED FILM WITH PRECISELY QUALITY CONTROL

TS11


FEATURES

- Low D.F. (dissipation factor), good self-healing character
- High I.R. (insulation resistance)
- High safety & high reliability
- Anti-Striking current, strong over-carrier capacity




SPECIFICATIONS										
OPERATING CONDITION	-40°C~+85°C									
CAPACITANCE RANGE	1uF~100uF(TS11-10~21)									
CAPACITANCE TOLERANCE	J(±5%) · K(±10%)									
RATED VOLTAGE	250V 450V (AC)									
WITHSTAND VOLTAGE	<table border="1"> <thead> <tr> <th colspan="2">Withstand voltage test</th> <th rowspan="4">GB/T3667.1-2016 IEC/EN60252.1</th> </tr> <tr> <th>Test area</th> <th>Test voltage</th> </tr> <tr> <td>T-T</td> <td>rated voltage</td> </tr> <tr> <td>T-C</td> <td>2400VAC(If all shell made of insulating materials, without any test in this project)</td> </tr> </thead> </table>	Withstand voltage test		GB/T3667.1-2016 IEC/EN60252.1	Test area	Test voltage	T-T	rated voltage	T-C	2400VAC(If all shell made of insulating materials, without any test in this project)
Withstand voltage test		GB/T3667.1-2016 IEC/EN60252.1								
Test area	Test voltage									
T-T	rated voltage									
T-C	2400VAC(If all shell made of insulating materials, without any test in this project)									
DISSIPATION FACTOR	≤0.004 100Hz (TS11-10~21)									
INSULATION RESISTANCE	≥3000S									


TS11-10




TS11-11




TS11-12




TS11-13




TS11-14

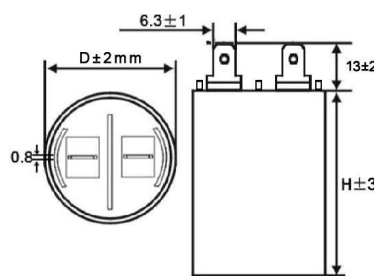


TS11-15




TS11-16




TS11-17




TS11-18




TS11-19(only for D:30mm)



TS11-20



TS11-21



Please visit our website to get more update data, those data & specification are subject to change without notice.

MOTOR CAPACITOR-CBB60

Suntan®

ELECTRICAL APPARATUE USE METALLIZED FILM WITH PRECISELY QUALITY CONTROL

FEATURES

TS11

- Low D.F. (dissipation factor), good self-healing character
- High I.R. (insulation resistance)
- High safety & high reliability
- Anti-Striking current, strong over-carrier capacity

Dimensions (mm)

CAP	TS11-11				TS11-12				TS11-13				TS11-14			
	250VAC		450VAC		250VAC		450VAC		250VAC		450VAC		250VAC		450VAC	
uF	D	H	D	H	D	H	D	H	D	H	D	H	D	H	D	H
1	30	53	30	53	30	50	30	50	30	57	30	57	30	50	30	50
1.5	30	53	30	53	30	50	30	50	30	57	30	57	30	50	30	50
2	30	53	30	53	30	50	30	50	30	57	30	57	30	50	30	50
2.5	30	53	30	53	30	50	30	50	30	57	30	57	30	50	30	50
3	30	53	30	53	30	50	30	50	30	57	30	57	30	50	30	50
3.5	30	53	30	53	30	50	30	50	30	57	30	57	30	50	30	50
3.75	--	--	--	--	30	50	30	50	30	57	30	57	--	--	--	--
4	30	53	30	53	30	50	30	50	30	57	30	57	30	50	30	50
4.5	30	53	30	53	30	50	30	50	30	57	30	57	30	50	30	50
4.7	30	53	30	63	30	50	30	60	30	57	35	65	--	--	--	--
5	30	53	30	63	30	50	30	60	30	57	35	65	30	50	30	60
6	30	53	30	63	30	50	30	60	30	57	35	65	30	50	30	60
6.3	30	53	30	63	30	50	30	60	30	57	35	65	--	--	--	--
7	30	53	35	63	30	50	35	60	30	57	35	65	30	50	35	60
8	30	53	35	63	30	50	35	60	30	57	35	65	30	50	35	60
9	--	--	--	--	30	60	35	60	30	57	35	65	--	--	--	--
10	30	63	35	73	30	60	35	70	30	57	35	65	30	50	35	70
11	--	--	--	--	30	60	35	70	--	--	--	--	--	--	--	--
12	30	63	35	73	30	60	35	70	35	65	40	70	30	50	35	70
12.5	35	63	40	73	35	60	40	70	35	65	40	70	35	60	40	70
13	35	63	40	73	35	60	40	70	--	--	--	--	35	60	40	70
14	35	63	40	73	35	60	40	70	35	65	40	70	35	60	40	70
15	35	63	40	73	35	60	40	70	35	65	40	70	35	60	40	70
16	35	63	40	73	35	60	40	70	35	65	40	70	35	60	40	70
18	35	63	45	73	35	60	45	70	35	65	40	70	35	60	45	70
20	35	73	45	73	35	70	45	70	40	70	40	95	35	70	45	70
22	35	73	45	73	35	70	45	70	40	70	40	95	35	70	45	70
24	40	73	40	96	40	70	40	93	40	70	40	95	40	70	40	93
25	40	73	40	96	40	70	40	93	40	70	40	95	40	70	40	93
30	40	73	45	96	40	70	45	93	40	70	45	95	40	70	45	93
31.5	--	--	--	--	--	--	--	--	40	95	45	95	--	--	--	--
35	40	73	45	96	45	70	45	93	40	95	45	95	45	70	45	93
40	40	73	50	95	45	70	50	92	40	95	50	105	45	70	50	92
45	40	96	50	95	40	93	50	92	40	95	50	105	40	93	50	92
50	40	96	50	103	40	93	50	100	40	95	50	105	40	93	50	100
55	45	96	50	123	45	93	50	120	45	95	50	116	45	93	50	120
60	45	96	50	123	45	93	50	120	45	95	50	116	45	93	50	120
65	45	96	55	123	45	93	55	120	45	95	55	120	45	93	55	120
70	50	95	55	123	50	92	55	120	50	106	55	120	50	92	55	120
75	50	95	55	123	50	92	55	120	50	106	55	120	50	92	55	120
80	50	95	55	123	50	92	55	120	50	106	55	120	50	92	55	120
85	50	95	60	123	50	92	60	120	50	106	60	120	50	92	60	120
90	50	103	60	123	50	100	60	120	50	106	60	120	50	100	60	120
100	50	103	60	123	50	100	60	120	50	106	60	120	50	100	60	120

Please visit our website to get more update data, those data & specification are subject to change without notice.

MOTOR CAPACITOR-CBB60

Suntan®

ELECTRICAL APPARATUE USE METALLIZED FILM WITH PRECISELY QUALITY CONTROL

FEATURES

TS11

- Low D.F. (dissipation factor), good self-healing character
- High I.R. (insulation resistance)
- High safety & high reliability
- Anti-Striking current, strong over-carrier capacity

Dimensions (mm)

CAP	TS11-15				JFS-16				JFS-17				JFS-18			
	250VAC		450VAC		250VAC		450VAC		250VAC		450VAC		250VAC		450VAC	
uF	D	H	D	H	D	H	D	H	D	H	D	H	D	H	D	H
1	30	57	30	57	30	60	30	60	30	60	30	60	30	53	30	53
1.5	30	57	30	57	30	60	30	60	30	60	30	60	30	53	30	53
2	30	57	30	57	30	60	30	60	30	60	30	60	30	53	30	53
2.5	30	57	30	57	30	60	30	60	30	60	30	60	30	53	30	53
3	30	57	30	57	30	60	30	60	30	60	30	60	30	53	30	53
3.5	30	57	30	57	30	60	30	60	30	60	30	60	30	53	30	53
3.75	30	57	30	57	--	--	--	--	30	60	30	60	30	53	30	53
4	30	57	30	57	30	60	30	60	30	60	30	60	30	53	30	53
4.5	30	57	30	57	30	60	30	60	30	60	30	60	30	53	30	53
4.7	--	--	--	--	--	--	--	--	--	--	--	--	30	53	30	63
5	30	57	35	65	30	60	30	60	30	60	30	60	30	53	30	63
6	30	57	35	65	30	60	30	60	30	60	30	60	30	53	30	63
6.3	30	57	35	65	30	60	30	60	30	60	30	60	30	53	30	63
7	30	57	35	65	30	60	35	63	30	60	35	68	30	53	35	63
7.5	--	--	--	--	30	60	35	63	--	--	--	--	--	--	--	--
8	30	57	35	65	30	60	35	63	30	60	35	68	30	53		
9	30	57	35	65	30	60	35	63	--	--	--	--	--	--	--	--
10	30	57	35	65	30	60	40	73	30	60	40	73	30	63	35	73
12	30	57	40	70	30	60	40	73	30	60	40	73	30	63	35	73
12.5	35	60	40	70	35	63	40	73	35	63	40	73	35	63	35	73
13	--	--	--	--	35	63	40	73	--	--	--	--	--	--	--	--
14	35	60	40	70	35	63	40	73	35	63	40	73	35	63	40	73
15	35	60	40	70	35	63	40	73	35	63	40	73	35	63	40	73
16	35	60	40	70	35	63	40	73	35	63	40	73	35	63	40	73
18	35	60	40	70	35	63	40	98	35	63	40	73	35	63	45	73
20	40	70	40	95	40	73	40	98	40	73	40	98	35	73	45	73
22	40	70	40	95	40	73	40	98	40	73	40	98	35	73	45	73
24	40	70	40	95	40	73	40	98	40	73	40	98	40	73	40	96
25	40	70	40	95	40	73	40	98	40	73	40	98	40	73	40	96
30	40	70	45	95	40	73	45	98	40	73	45	98	40	73	45	96
33	--	--	--	--	--	--	--	--	--	--	--	--	45	73	45	96
35	40	95	45	95	40	98	45	98	40	98	45	98	45	73	45	96
40	40	95	50	105	40	98	50	109	40	98	50	109	45	73	50	95
45	40	95	50	105	40	98	50	109	40	98	50	109	40	96	50	95
50	40	95	50	105	40	98	50	109	40	98	50	109	40	96	50	103
55	45	95	50	116	45	98	50	119	45	98	50	119	45	96	50	123
60	50	106	50	116	45	98	50	119	45	98	50	119	45	96	50	123
65	50	106	55	120	45	98	55	123	45	98	55	123	45	96	55	123
70	50	106	55	120	50	109	55	123	50	109	55	123	50	95	55	123
75	50	106	55	120	50	109	55	123	50	109	55	123	50	95	55	123
80	50	106	55	120	50	109	60	123	50	109	60	123	50	95	55	123
85	50	106	60	120	50	109	60	123	50	109	60	123	50	95	60	123
90	50	106	60	120	50	109	60	123	50	109	60	123	50	103	60	123
100	50	106	60	120	50	109	60	123	50	109	60	123	50	103	60	123

Please visit our website to get more update data, those data & specification are subject to change without notice.