



MINI DIP SWITCHES (Half-pitch) 1.27mm



FEATURES :

- This series is surface mount type based on 1.27mm pitch.
- The contacts is twin points' and gold-plated.
- You have a choice of Reel or Tube for the packaging.
- The epoxies sealed (treated whole internal circumference and a part of outer circumference) keep out impure flux.

Part Number Ordering Terminology

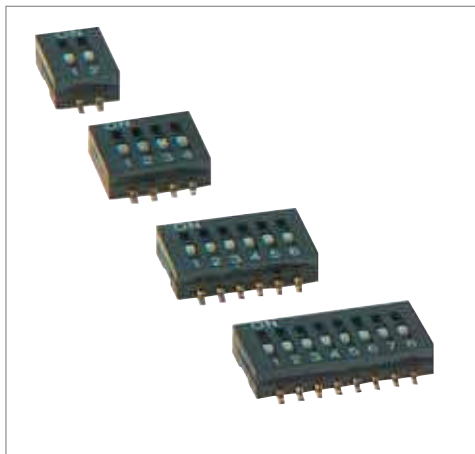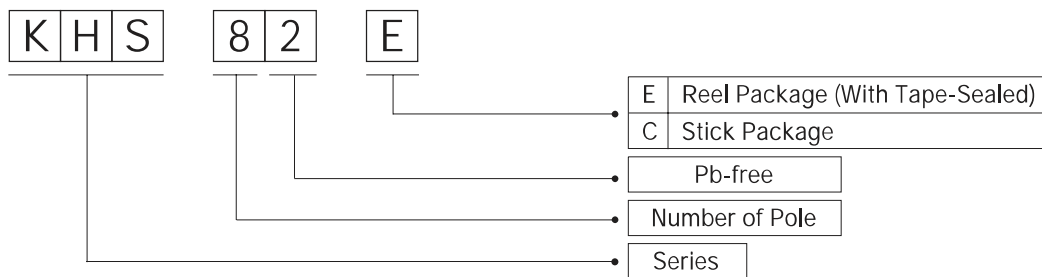

Type	Poles(n)	L(mm)
KHS-22	2	3.67
KHS-42	4	6.21
KHS-62	6	8.75
KHS-82	8	11.29
KHS-102	10	13.83

SPECIFICATION	
	100mA 50VDC on load 25mA 25VDC on switching 100mA 5VDC on switching
Contact Resistance	Max 100m Ω
Insulation Resistance	100VDC. Min 100M Ω
Dielectric Strength	300VDC. 1minute
Durability	1,000 operations. min
Operating Force	500g max

Outline & Mounting Dimensions

