


### LOW DROP FIXED AND ADJUSTABLE POSITIVE VOLTAGE REGULATOR

The KIA1117DS × × Series are a Low Drop Voltage Regulator able to provide up to 1A of output current, available even in adjustable version (Vref=1.25V)

#### FEATURES

- Low Dropout Voltage : 1.3V/Typ. (Iout=1.0A)
- Very Low Quiescent Current : 2mA(Typ)
- Output Current up to 1A
- Fixed Output Voltage of 1.2V, 1.5V, 1.8V, 2.5V, 3.3V, 5.0V
- Adjustable Version Availability : Vref=1.25V
- Internal Current and Thermal Limit
- A Minimum of 10μF for stability
- Compatible with tantalum capacitor, electrolytic capacitor, MLCC
- Available in ± 2%(at 25 °C)

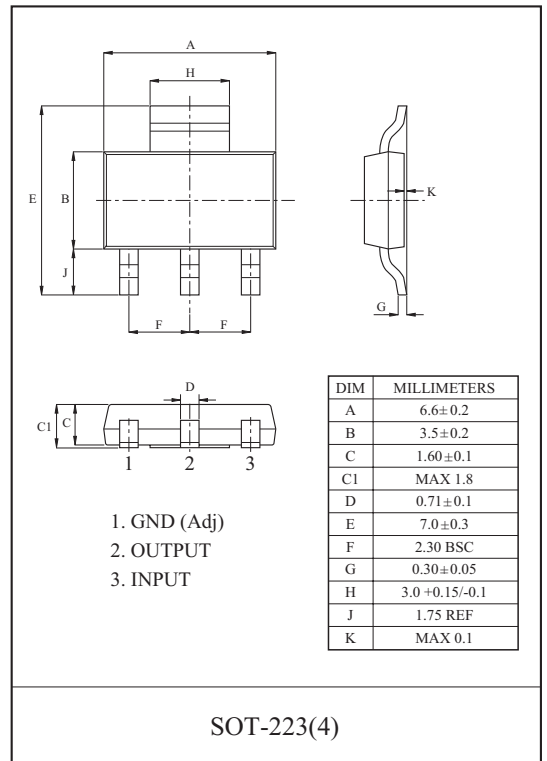


#### LINE UP

ITEM	OUTPUT VOLTAGE (V)	PACKAGE
KIA1117DS00	Adjustable (1.25~12V)	DS : SOT-223(4)
KIA1117DS12	1.2	
KIA1117DS15	1.5	
KIA1117DS18	1.8	
KIA1117DS25	2.5	
KIA1117DS33	3.3	
KIA1117DS50	5.0	

# KIA1117DS00~KIA1117DS50

## ORDERING INFORMATION

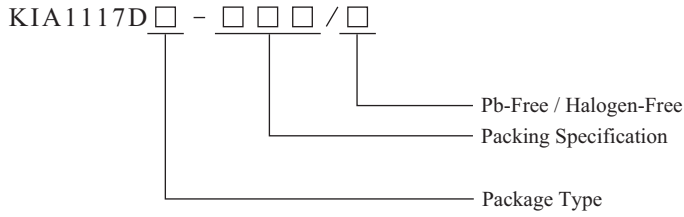

ITEM	Package Code		Packing Specification		Pb-Free / Halogen-Free	
	Code	Package				
KIA1117D	S	SOT-223(4)	RTK	RTK type	P	Pb-Free
			RTF	RTF type	H	Halogen-Free

## MAXIMUM RATINGS (Ta=25 °C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Input Voltage	$V_{IN}$	15	V
Output Current	$I_{OUT}$	1.0	A
Power Dissipation 1 (No Heatsink)	$P_{D1}$	1.0	W
Power Dissipation 2 (Infinite Heatsink)	$P_{D2}$	8.3	W
Maximum operating Junction Temperature	$T_{j(max)}$	150	
Operating Temperature	$T_{opr}$	-40 85	
Storage Temperature	$T_{stg}$	-40 150	

Note) Package Mounted on FR-4 PCB 36mm × 18mm × 1.5mm.  
: mounting pad for the GND Lead min. 6cm<sup>2</sup>

# KIA1117DS00~KIA1117DS50


## ELECTRICAL CHARACTERISTICS

Unless otherwise specified,  $T_j=25$

CHARACTERISTIC	ITEM	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Reference Voltage	KIA1117-Adj	$V_{REF}$	$V_{IN}=3.25V, I_{OUT} = 1A$	1.225	1.25	1.275	V
Output Voltage	KIA1117-12	$V_{OUT}$	$V_{IN}=3.2V, I_{OUT} = 1A$	1.176	1.2	1.224	V
	KIA1117-15	$V_{OUT}$	$V_{IN}=3.5V, I_{OUT} = 1A$	1.47	1.5	1.53	V
	KIA1117-18	$V_{OUT}$	$V_{IN}=3.8V, I_{OUT} = 1A$	1.764	1.8	1.836	V
	KIA1117-25	$V_{OUT}$	$V_{IN}=4.5V, I_{OUT} = 1A$	2.45	2.5	2.55	V
	KIA1117-33	$V_{OUT}$	$V_{IN}=5.3V, I_{OUT} = 1A$	3.234	3.3	3.366	V
	KIA1117-50	$V_{OUT}$	$V_{IN}=7.0V, I_{OUT} = 1A$	4.9	5	5.1	V
Line Regulation	KIA1117-12	Reg Line	$2.7V \leq V_{IN} \leq 10V, I_{OUT}=10mA$	-	0.1	0.2	%/V
	-		$V_{OUT}+1.5V \leq V_{IN} \leq 12V, I_{OUT}=10mA$	-	0.1	0.2	%/V
Load Regulation	-	Reg Load	$I_{OUT} = 1A, V_{IN}=V_{OUT}+1.5V$	-	10	30	mV
Adjustable Pin Current	KIA1117-Adj	$I_{ADJ}$	$V_{IN}=5V, I_{OUT} = 1A$	-	55	120	$\mu A$
Minimum Load Current	KIA1117-Adj	$I_{min}$	$V_{IN}=V_{OUT}+1.5V$	-	2	10	mA
Quiescent Current	KIA1117-12	$I_{B1}$	$V_{IN}=10V, I_{OUT}=0A$	-	2	5	mA
	-	$I_{B2}$	$V_{IN}=12V, I_{OUT}=0A$				
Current Limit	-	$I_{limit}$	$V_{IN}=V_{OUT}+2.0V, T_j=25$	1	-	-	A
Dropout Voltage	-	$V_{DROP}$	$I_{OUT}=1A$	-	1.3	1.5	V
			$I_{OUT}=100mA$	-	1.23	1.3	V
Temperature Stability	-	$TCV_O$	$V_{IN}=V_{OUT}+1.5V, I_{OUT}=10mA, T_j=-20\sim 125$	-	$\pm 100$	-	ppm/

# KIA1117DS00~KIA1117DS50


**Fig.1 Application Circuit-1 (Fixed-Type)**

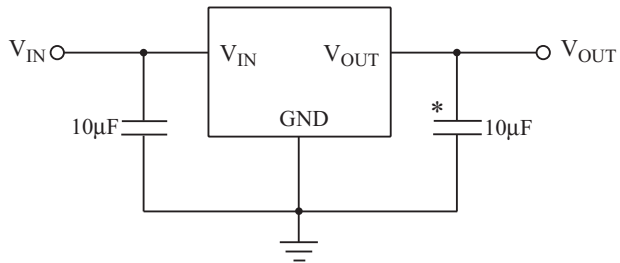

\* Note 1) Recommend using 10uF tan capacitor, MLCC to assure circuit stability.

\*\* Note 2) To meet the minimum load current (>10mA) requirement, R1 is recommended to be 125 ohm or lower. As KIA1117-ADJ can keep itself stable at load current about 2mA, R1 is not allowed to be higher than 625 ohm.

**Fig.2 Application Circuit-2 (Adjustable-Type)**

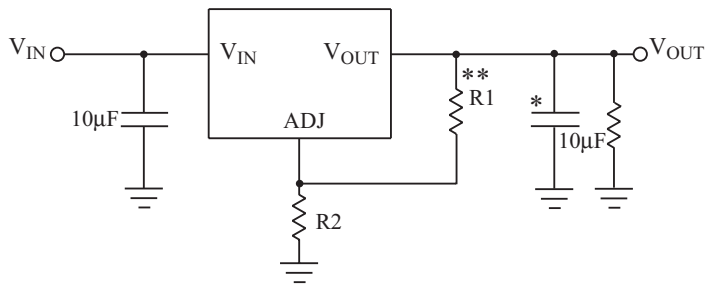

$$V_{OUT}=1.25 \times (1+R2/R1) + I_{ADJ} \times R2$$

# KIA1117DS00~KIA1117DS50

Fig. 3 KIA1117-ADJ  $V_{OUT}$  -  $V_{IN}$

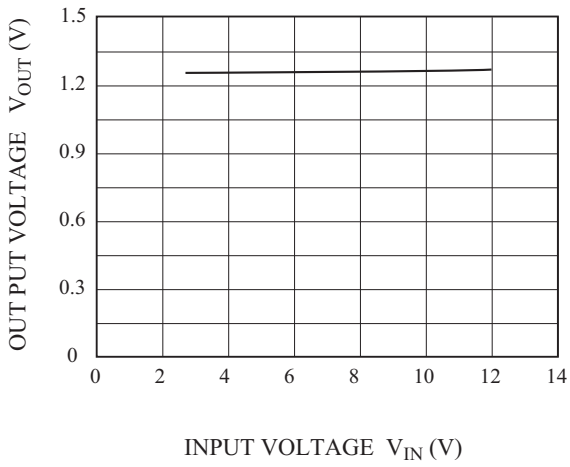


Fig. 4 KIA1117-ADJ  $V_{OUT}$  -  $I_{OUT}$

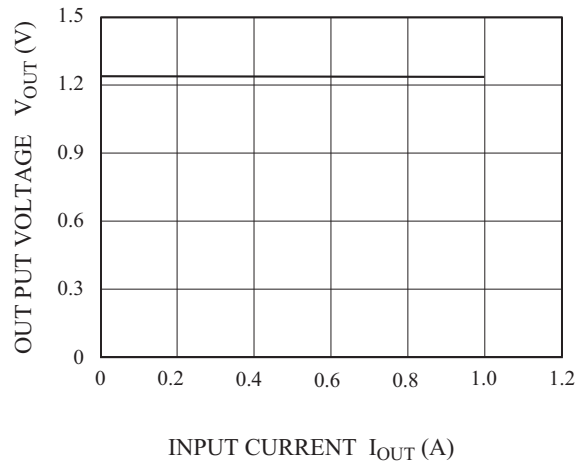


Fig. 5 KIA1117-ADJ DROPUT -  $I_{OUT}$

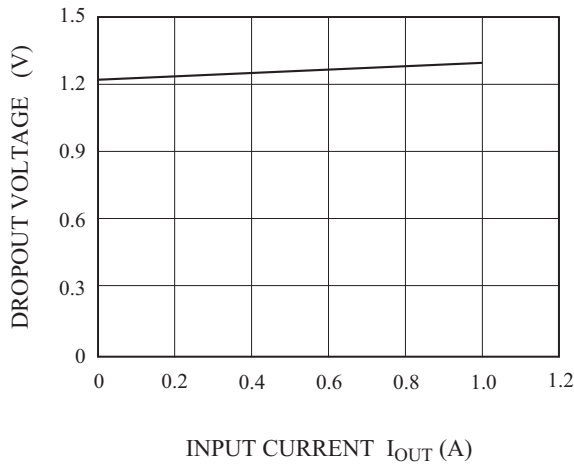


Fig. 6 KIA1117-ADJ  $V_{OUT}$  - TEMP

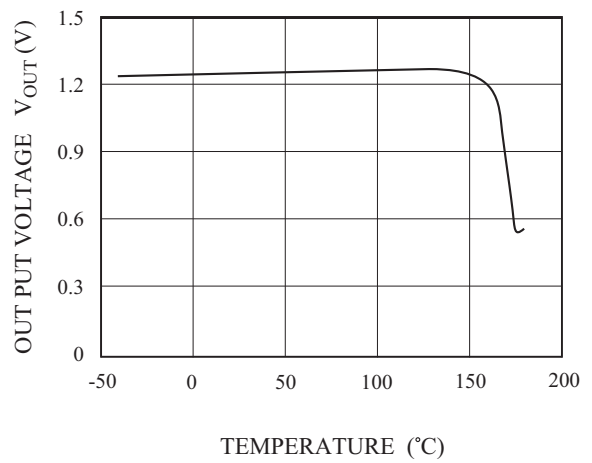


Fig.7  $P_D$  -  $T_a$

