


SWITCHING APPLICATION.
INTERFACE CIRCUIT AND DRIVER CIRCUIT APPLICATION.

FEATURES


- With Built-in Bias Resistors
- Simplify Circuit Design
- Reduce a Quantity of Parts and Manufacturing Process
- High Packing Density.

EQUIVALENT CIRCUIT



BIAS RESISTOR VALUES

TYPE NO.	R1(k Ω)	R2(k Ω)
KRA307V	10	47
KRA308V	22	47
KRA309V	47	22

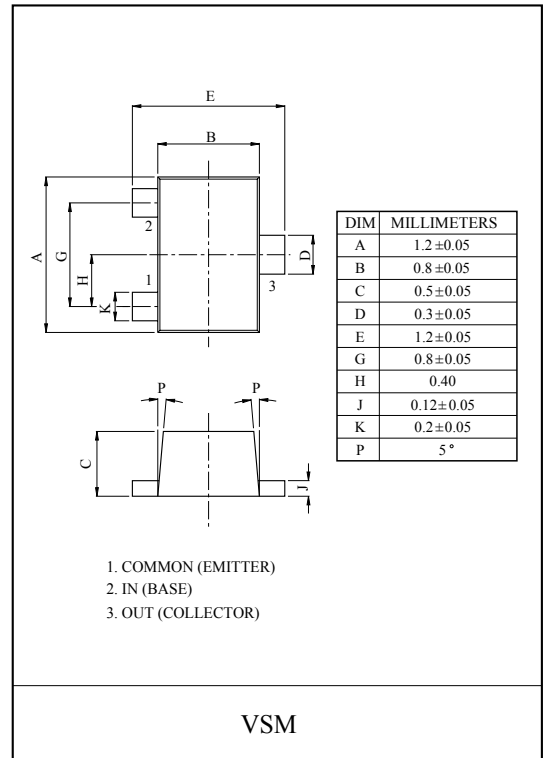


MAXIMUM RATING (Ta=25°C)

CHARACTERISTIC		SYMBOL	RATING	UNIT
Output Voltage	KRA307V ~ 309V	V _O	-50	V
Input Voltage	KRA307V	V _I	-30, 6	V
	KRA308V		-40, 7	
	KRA309V		-40, 15	
Output Current	KRA307V ~ 309V	I _O	-100	mA
Power Dissipation		P _D	100	mW
Junction Temperature		T _j	150	°C
Storage Temperature Range		T _{stg}	-55 ~ 150	°C

MARK SPEC

TYPE	KRA307V	KRA308V	KRA309V
MARK	PH	PI	PJ

Marking









KRA307V~KRA309V

ELECTRICAL CHARACTERISTICS (Ta=25°C)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT	
Output Cut-off Current		KRA307V ~ 309V	$I_{O(OFF)}$	$V_O=-50V, V_I=0$	-	-	-500	nA
DC Current Gain	KRA307V		G_I	$V_O=-5V, I_O=-10mA$	80	150	-	
	KRA308V				80	150	-	
	KRA309V				70	140	-	
Output Voltage		KRA307V ~ 309V	$V_{O(ON)}$	$I_O=-10mA, I_I=-0.5mA$	-	-0.1	-0.3	V
Input Voltage (ON)	KRA307V		$V_{I(ON)}$	$V_O=-0.2V, I_O=-5mA$	-	-1.2	-1.8	V
	KRA308V				-	-1.8	-2.6	
	KRA309V				-	-3.0	-5.8	
Input Voltage (OFF)	KRA307V		$V_{I(OFF)}$	$V_O=-5V, I_O=-0.1mA$	-0.5	-0.75	-	V
	KRA308V				-0.6	-0.88	-	
	KRA309V				-1.5	-1.82	-	
Transition Frequency		KRA307V ~ 309V	f_T^*	$V_O=-10V, I_O=-5mA$	-	200	-	MHz
Input Current	KRA307V		I_I	$V_I=-5V$	-	-	-0.88	mA
	KRA308V				-	-	-0.36	
	KRA309V				-	-	-0.16	
Switching Time	Rise Time	KRA307V	t_r	$V_O=-5V, V_{IN}=-5V$ $R_L=1k\Omega$	-	0.07	-	μS
		KRA308V			-	0.20	-	
		KRA309V			-	0.38	-	
	Storage Time	KRA307V	t_{stg}		-	1.1	-	
		KRA308V			-	1.3	-	
		KRA309V			-	0.7	-	
	Fall Time	KRA307V	t_f		-	0.35	-	
		KRA308V			-	0.4	-	
		KRA309V			-	0.48	-	

Note : * Characteristic of Transistor Only.

KRA307V~KRA309V

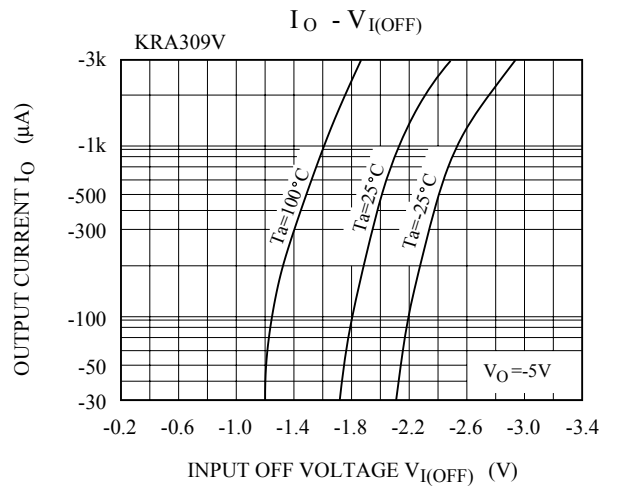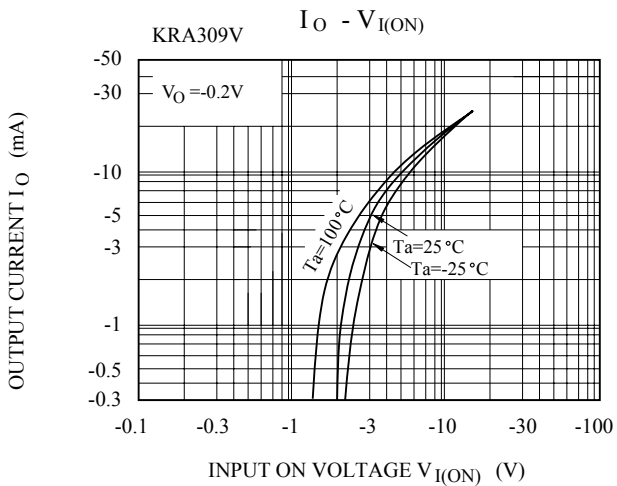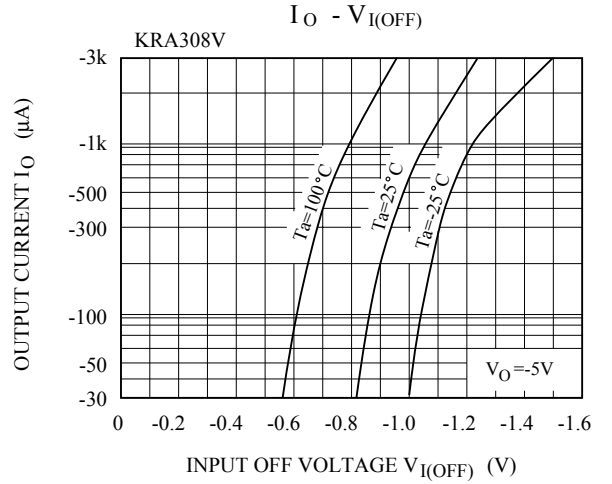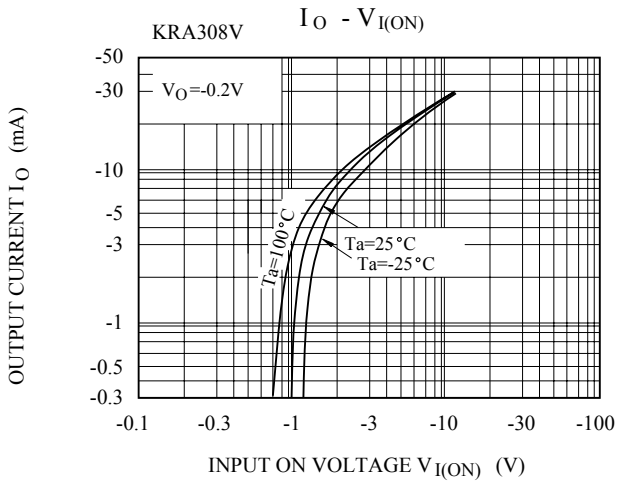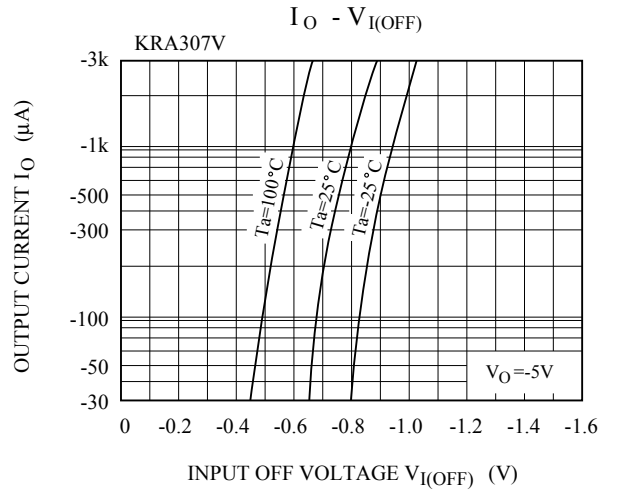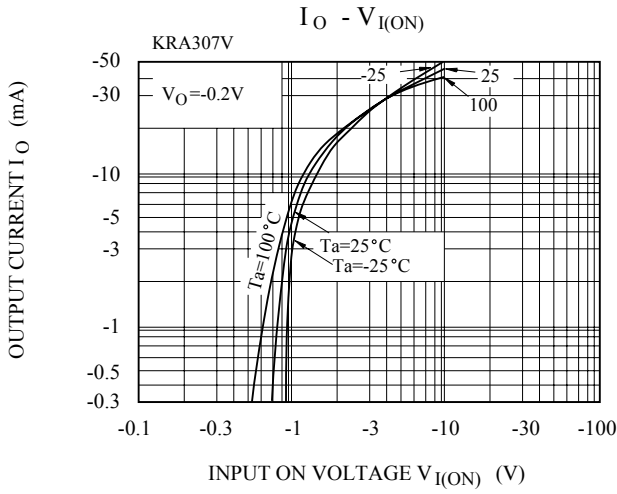

KRA307V~KRA309V

