
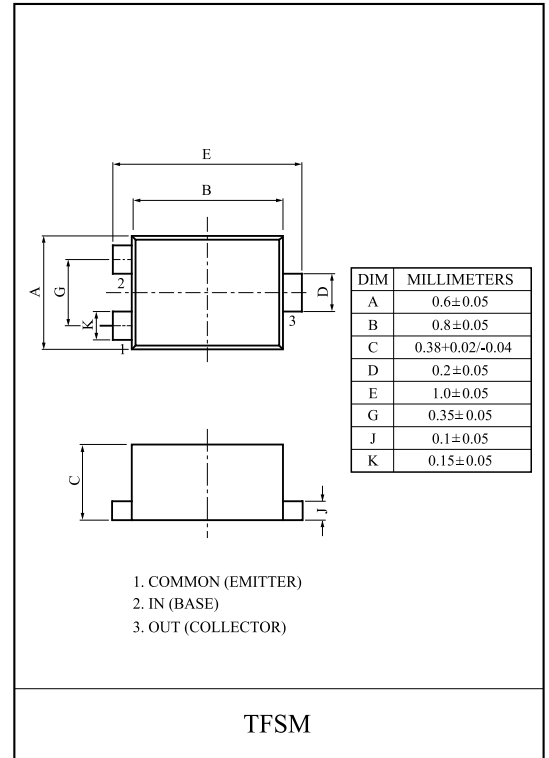


SWITCHING APPLICATION.
INTERFACE CIRCUIT AND DRIVER CIRCUIT APPLICATION.

FEATURES

- With Built-in Bias Resistors.
- Simplify Circuit Design.
- Reduce a Quantity of Parts and Manufacturing Process.
- Thin fine Pitch Small Package.

EQUIVALENT CIRCUIT

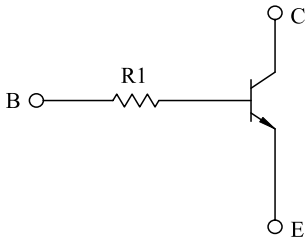

MAXIMUM RATING (Ta=25)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	V_{CBO}	20	V
Collector-Emitter Voltage	V_{CEO}	20	V
Emitter-Base Voltage	V_{EBO}	5	V
Collector Current	I_C	50	mA

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector Power Dissipation	P_C	50	mW
Junction Temperature	T_j	150	
Storage Temperature Range	T_{stg}	-55 150	


ELECTRICAL CHARACTERISTICS (Ta=25)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	I_{CBO}	$V_{CB}=20V, I_E=0$	-	-	100	nA
Emitter Cut-off Current	I_{EBO}	$V_{EB}=5V, I_C=0$	-	-	100	nA
DC Current Gain	h_{FE}	$V_{CE}=5V, I_C=1mA$	300	-	-	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=5mA, I_B=0.25mA$	-	-	0.15	V
Collector Output Capacitance	C_{ob}	$V_{CB}=10V, I_E=0, f=1MHz$	-	1.2	-	pF
Input Resistor	KRC160F	-	3.29	4.7	6.11	k
	KRC161F		7	10	13	
	KRC163F		15.4	22	28.6	
	KRC164F		32.9	47	61.1	

MARK SPEC


TYPE	KRC160F	KRC161F	KRC163F	KRC164F
MARK	FK	FL	FN	FP

Marking

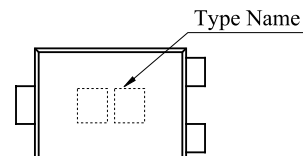


KRC160F~KRC164F


$I_O - V_{I(ON)}$

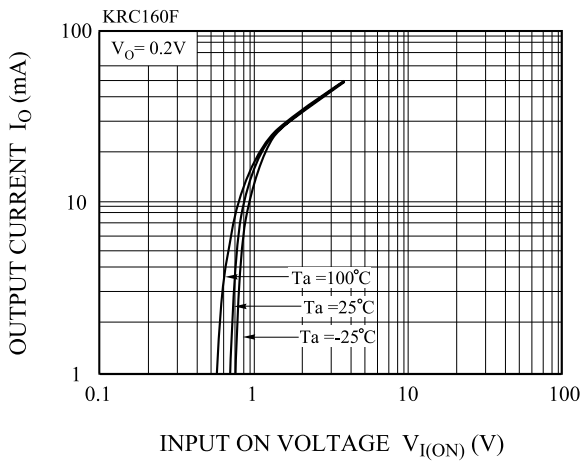


$I_O - V_{I(OFF)}$

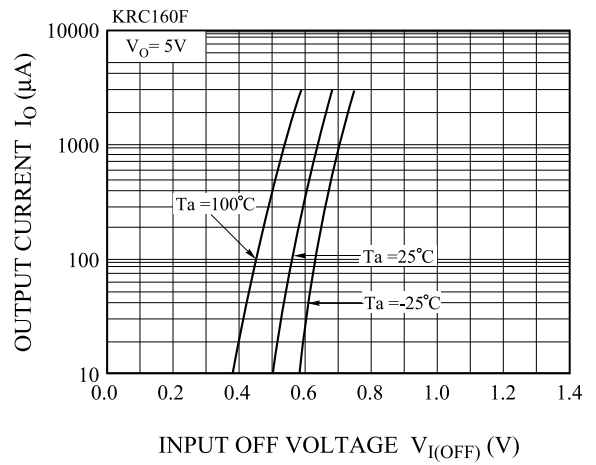


$G_I - I_O$

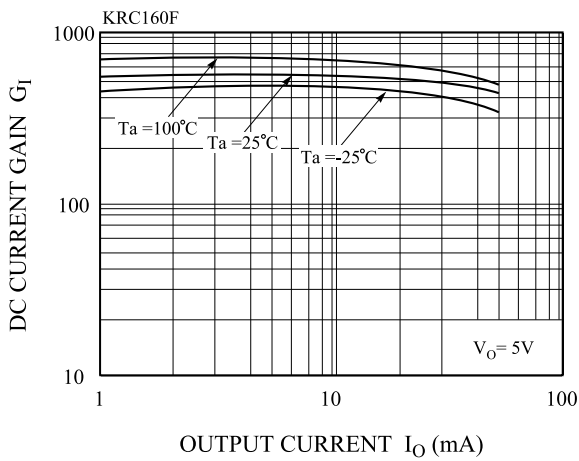


$V_{O(ON)} - I_O$

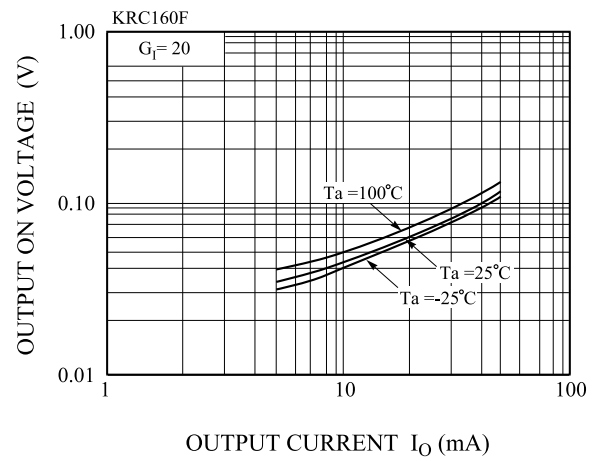

$I_O - V_{I(ON)}$

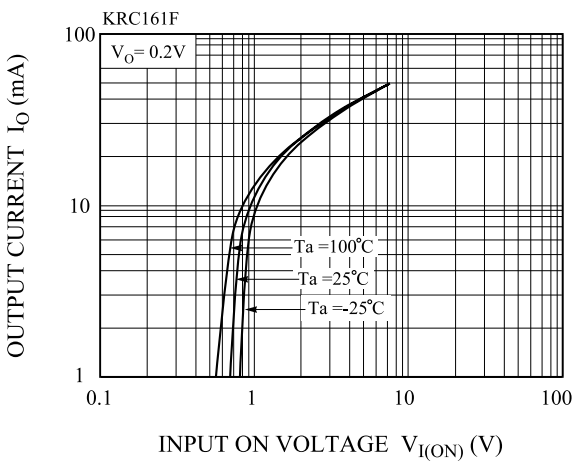


$I_O - V_{I(OFF)}$

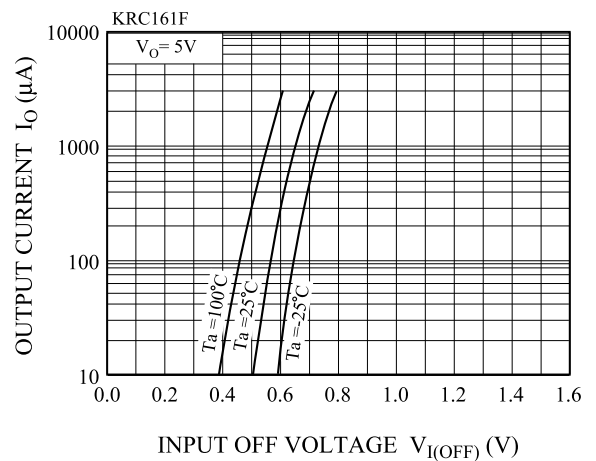


KRC160F~KRC164F


$G_I - I_O$

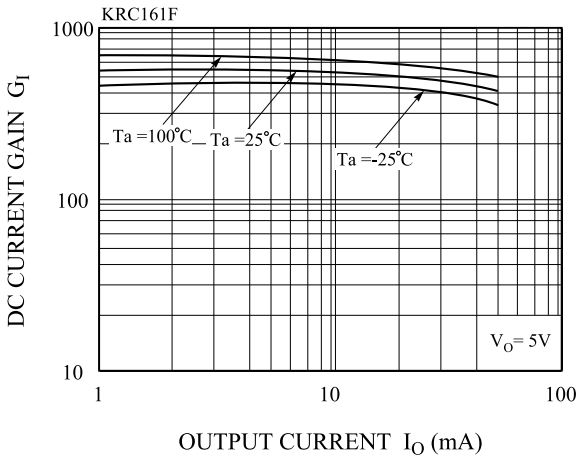


$V_{O(ON)} - I_O$

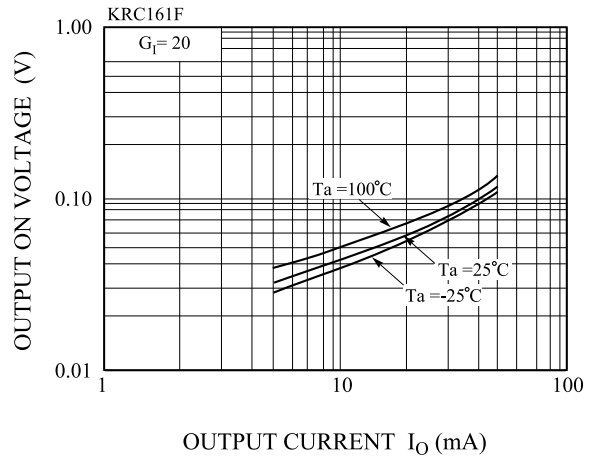


$I_O - V_{I(ON)}$

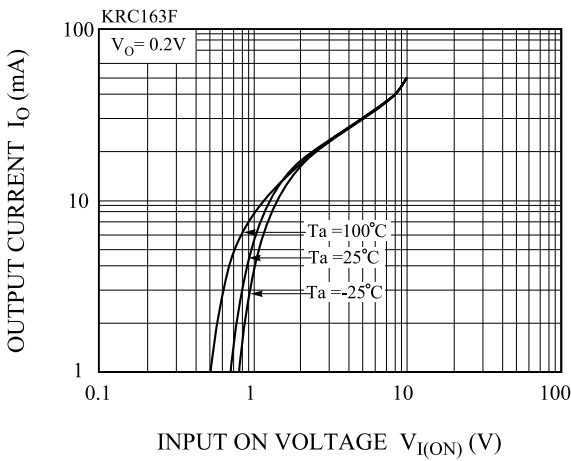


$I_O - V_{I(OFF)}$

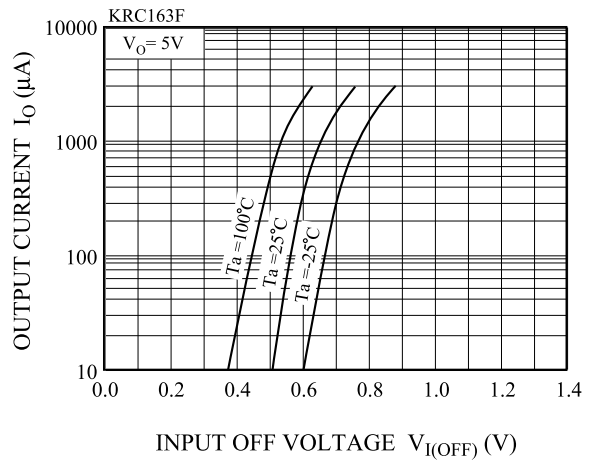

$G_I - I_O$

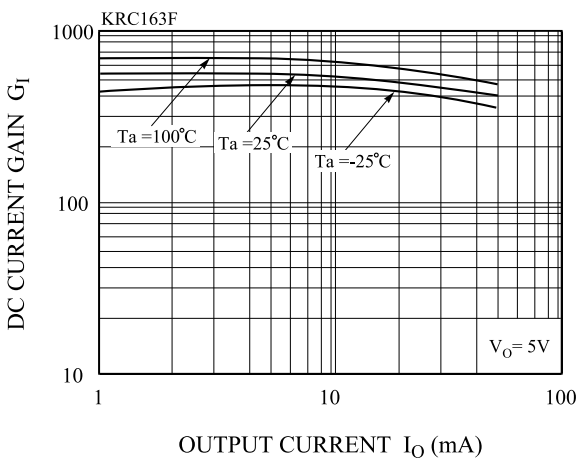


$V_{O(ON)} - I_O$

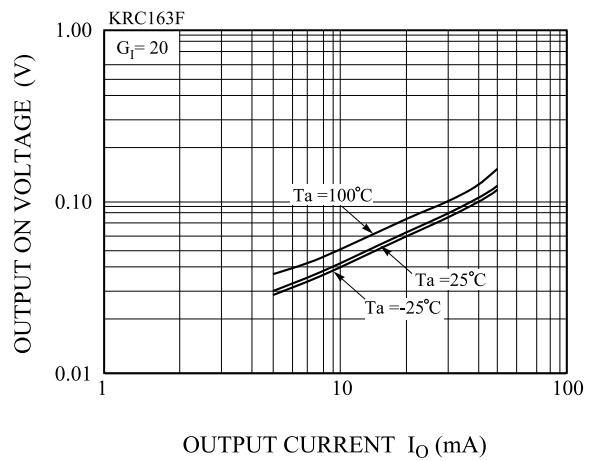


KRC160F~KRC164F


$I_O - V_{I(ON)}$

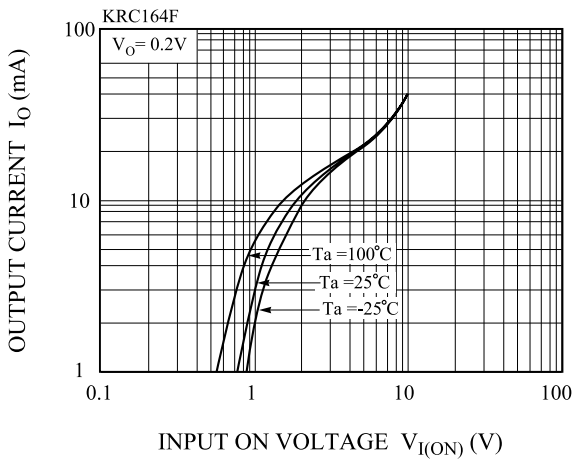

$I_O - V_{I(OFF)}$

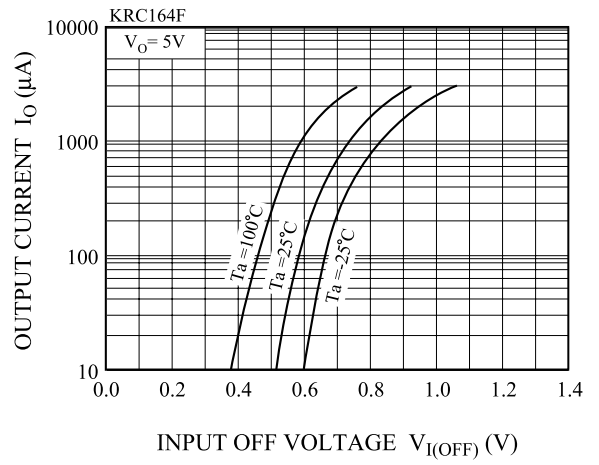

$G_I - I_O$

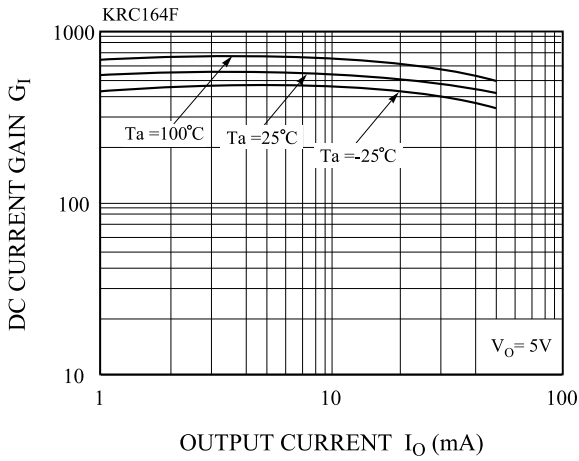

$V_{O(ON)} - I_O$

