


# PRODUCT SPECIFICATION


DATE: 05/27/11'

<b>cosmo</b> ELECTRONICS CORPORATION	SOLID STATE RELAY :	NO. 58083240	REV.
	<b>KSA240AC8</b>	SHEET 1 OF 2	6

## 1. OUTSIDE DIMENSION : UNIT ( mm )

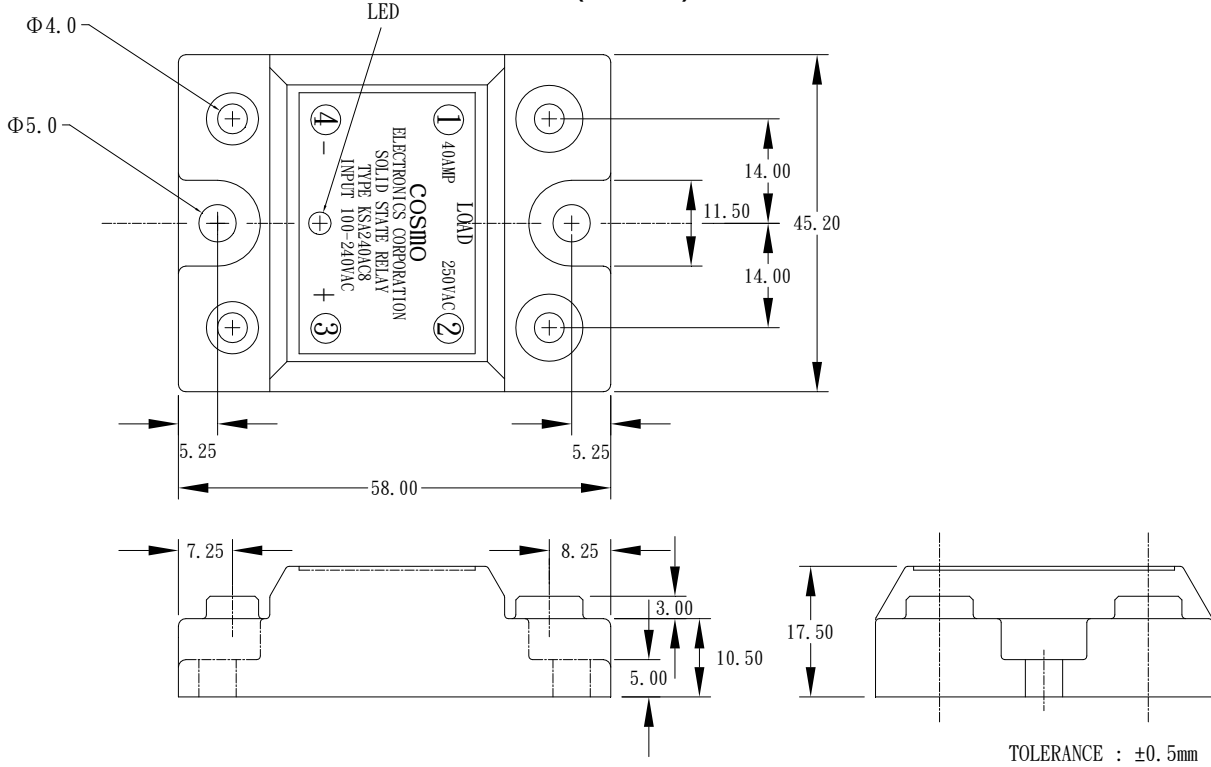

## 2. SCHEMATIC : TOP VIEW

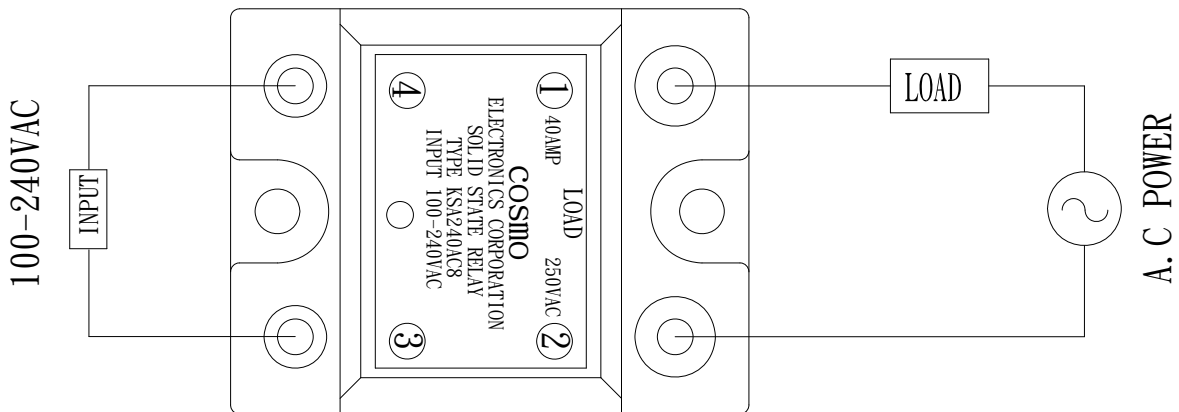

# PRODUCT SPECIFICATION

DATE: 05/27/11'

<b>cosmo</b> ELECTRONICS CORPORATION	SOLID STATE RELAY :	NO. 58083240	REV.
	<b>KSA240AC8</b>	SHEET 2 OF 2	6

## 3. Absolute Maximum Ratings

(Ta=25°C)

Parameter		Symbol	Rating	Unit
Input	Input signal voltage	$V_{IN}$	100~240	VAC
	Drop-out voltage	$V_{do}$	10	VAC
Output	RMS on-state current	$I_T$	40	Arms
	Peak one cycle surge current (8.3ms)	$I_{surge}$	400	A
	Repetitive peak-off state voltage	$V_{DRM}$	600	V
	Operating frequency	f	47~70	Hz
	Critical rate of rise of on-state current	di/dt	50	A/us
	Load supply voltage	$V_{out}$	250	Vrms AC
Isolation voltage input to output		$V_{iso}$	4000	Vrms
Operating temperature		$T_{opr}$	-30~100	°C
Storage temperature		$T_{stg}$	-30~125	°C
Soldering temperature 10 sec		$T_{sol}$	300	°C

## 4. Electrical Characteristics

(Ta=25°C)

Parameter		Symbol	Conditions	MIN	TYP	MAX	Unit
Input	Pick-up voltage	$V_{pu}$	$R_{in}=11K\Omega$			100	VAC
	Input current	$R_{in}$			11		$K\Omega$
Output	On-state voltage	$V_T$	$I_T=1Arms$			1.5	Vrms
	Operating current	$I_{op}$	$V_{out}=240Vrms$	50			mArms
	Leakage current	$I_{leak}$	$V_{out}=240Vrms$		3.5	8	mArms
	Critical rate of rise of off-state voltage	dv/dt		100			V/us
	Zero-cross voltage	$V_{ox}$			YES		
Load Voltage Rating		$V_{out}$	$I_T=50mArms$ MIN	50		280	VAC
Minimum trigger current		$I_{FT}$	$V_{DRM}=600V$			25	mA
Isolation resistance input to output		$R_{ISO}$	DC500V	10			$G\Omega$
Turn-on time		$T_{on}$	60Hz AC			8.3	mS
Turn-off time		$T_{off}$	60Hz AC			8.3	mS
Thermal resistance (between junction and case)		$R_{th}$ (j-c)			2.5		°C/W