




# LD1085 SERIES

## 3A LOW DROP POSITIVE VOLTAGE REGULATOR ADJUSTABLE AND FIXED

- TYPICAL DROPOUT 1.3V (AT 3A)
- THREE TERMINAL ADJUSTABLE OR FIXED OUTPUT VOLTAGE 1.5V, 1.8V, 2.5V, 2.85V, 3.3V, 3.6V, 5V, 8V, 9V, 12V.
- GUARANTEED OUTPUT CURRENT UP TO 3A
- OUTPUT TOLERANCE  $\pm 1\%$  AT 25°C AND  $\pm 2\%$  IN FULL TEMPERATURE RANGE
- INTERNAL POWER AND THERMAL LIMIT
- WIDE OPERATING TEMPERATURE RANGE -40°C TO 125°C
- PACKAGE AVAILABLE : TO-220, TO-220FP, D<sup>2</sup>PAK, D<sup>2</sup>PAK/A
- PINOUT COMPATIBILITY WITH STANDARD ADJUSTABLE VREG

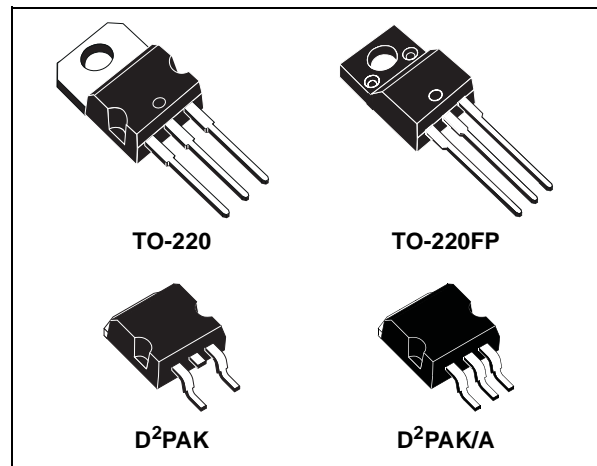


### DESCRIPTION

The LD1085 is a LOW DROP Voltage Regulator able to provide up to 3A of Output Current. Dropout is guaranteed at a maximum of 1.5V at the maximum output current, decreasing at lower loads. The LD1085 is pin to pin compatible with the older 3-terminal adjustable regulators, but has better performances in term of drop and output tolerance .

A 2.85V output version is suitable for SCSI-2 active termination. Unlike PNP regulators, where a part of the output current is wasted as quiescent current, the LD1085 quiescent current flows into the load, so increase efficiency. Only a 10 $\mu$ F minimum capacitor is need for stability. The device is supplied in TO-220, TO-220FP, D<sup>2</sup>PAK and D<sup>2</sup>PAK/A. On chip trimming allows the regulator to reach a very tight output voltage tolerance, within  $\pm 1\%$  at 25°C.

### SCHEMATIC DIAGRAM

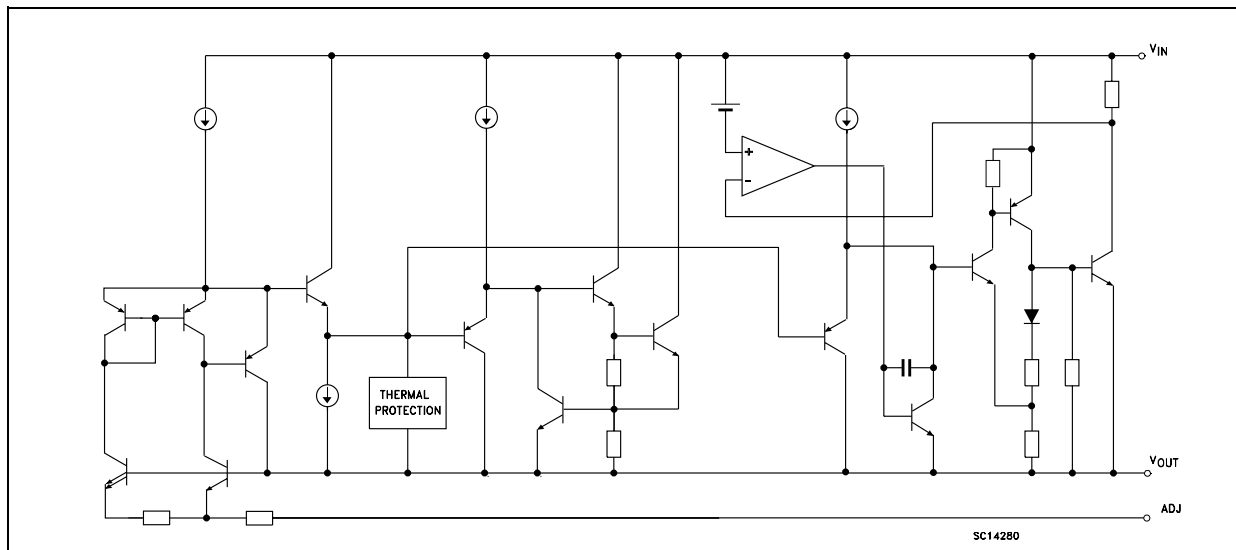

## LD1085 SERIES

### ABSOLUTE MAXIMUM RATINGS


| Symbol    | Parameter <sup>2</sup>               | Value              | Unit |
|-----------|--------------------------------------|--------------------|------|
| $V_I$     | DC Input Voltage                     | 30                 | V    |
| $I_O$     | Output Current                       | Internally Limited | mA   |
| $P_D$     | Power Dissipation                    | Internally Limited | mW   |
| $T_{stg}$ | Storage Temperature Range            | -55 to +150        | °C   |
| $T_{op}$  | Operating Junction Temperature Range | -40 to +125        | °C   |

Absolute Maximum Ratings are those values beyond which damage to the device may occur. Functional operation under these condition is not implied.


### THERMAL DATA

| Symbol         | Parameter                           | TO-220 | D <sup>2</sup> PAK | Unit |
|----------------|-------------------------------------|--------|--------------------|------|
| $R_{thj-case}$ | Thermal Resistance Junction-case    | 3      | 3                  | °C/W |
| $R_{thj-amb}$  | Thermal Resistance Junction-ambient | 50     | 62.5               | °C/W |

### APPLICATION CIRCUITS

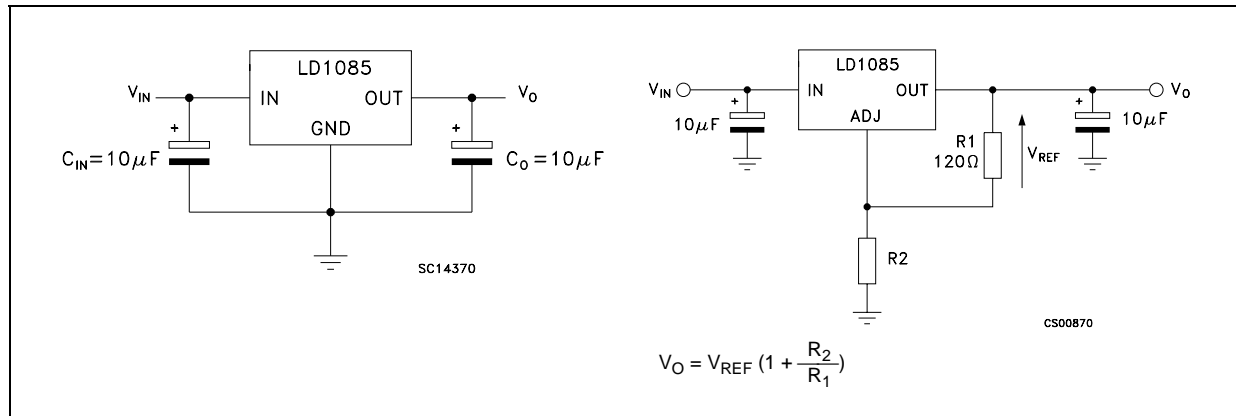

CONNECTION DIAGRAM (top view)

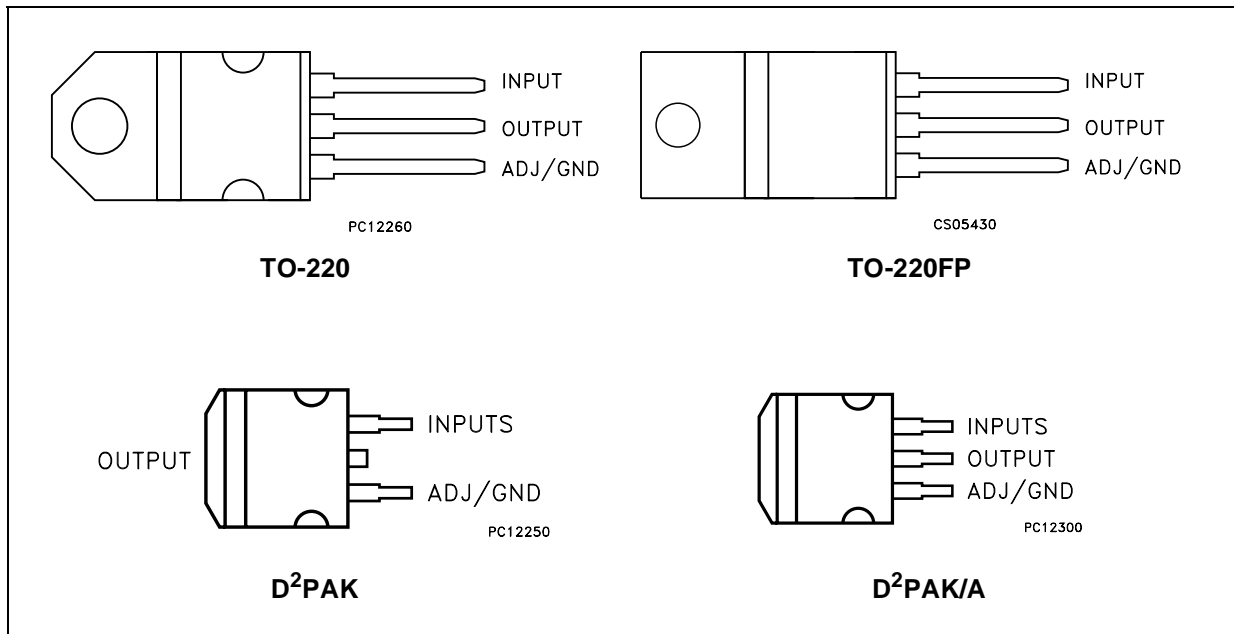

ORDERING CODES

| TO-220     | TO-220FP   | D <sup>2</sup> PAK (*) | D <sup>2</sup> PAK/A (*) | OUTPUT VOLTAGE |
|------------|------------|------------------------|--------------------------|----------------|
| LD1085V15  | LD1085P15  | LD1085D2T15            | LD1085D2M15              | 1.5 V          |
| LD1085V18  | LD1085P18  | LD1085D2T18            | LD1085D2M18              | 1.8 V          |
| LD1085V25  | LD1085P25  | LD1085D2T25            | LD1085D2M25              | 2.5 V          |
| LD1085V28  | LD1085P28  | LD1085D2T28            | LD1085D2M28              | 2.85 V         |
| LD1085V33  | LD1085P33  | LD1085D2T33            | LD1085D2M33              | 3.3 V          |
| LD1085V36  | LD1085P36  | LD1085D2T36            | LD1085D2M36              | 3.6 V          |
| LD1085V50  | LD1085P50  | LD1085D2T50            | LD1085D2M50              | 5.0 V          |
| LD1085V80  | LD1085P80  | LD1085D2T80            | LD1085D2M80              | 8.0 V          |
| LD1085V90  | LD1085P90  | LD1085D2T90            | LD1085D2M90              | 9.0 V          |
| LD1085V120 | LD1085P120 | LD1085D2T120           | LD1085D2M120             | 12.0 V         |
| LD1085V    | LD1085P    | LD1085D2T              | LD1085D2M                | ADJ            |

(\*) Available in Tape & Reel with the suffix "R" for fixed version and "-R" for adjustable version.

## LD1085 SERIES

**ELECTRICAL CHARACTERISTICS OF LD1085#15** ( $V_I=4.5V$ ,  $C_I = C_O=10\mu F$ ,  $T_A = -40$  to  $125^\circ C$ , unless otherwise specified.)

| Symbol       | Parameter                              | Test Conditions  | Min.  | Typ.  | Max.  | Unit |
|--------------|--|--|-------|-------|-------|------|
| $V_O$        | Output Voltage                         | $I_O = 0 \text{ mA}$ $T_J = 25^\circ C$                                    | 1.485 | 1.5   | 1.515 | V    |
|              |  | $I_O = 0$ to $5A$ $V_I = 3.1$ to $30V$ (note 1)                            | 1.47  | 1.5   | 1.53  | V    |
| $\Delta V_O$ | Line Regulation                        | $I_O = 0 \text{ mA}$ $V_I = 3.1$ to $18V$ $T_J = 25^\circ C$               |       | 0.2   | 4     | mV   |
|              |  | $I_O = 0 \text{ mA}$ $V_I = 3.1$ to $15V$                                  |       | 0.4   | 4     | mV   |
| $\Delta V_O$ | Load Regulation                        | $I_O = 0$ to $3A$ $T_J = 25^\circ C$                                       |       | 2     | 10    | mV   |
|              |  | $I_O = 0$ to $3A$  |       | 4     | 20    | V    |
| $V_d$        | Dropout Voltage                        | $I_O = 3 \text{ A}$  |       | 1.3   | 1.5   | V    |
| $I_q$        | Quiescent Current                      | $V_I \leq 30V$   |       | 5     | 10    | mA   |
| $I_{sc}$     | Short Circuit Current                  | $V_I - V_O = 5V$   | 3.2   | 4.5   |       | A    |
|              |  | $V_I - V_O = 25V$  | 0.2   | 0.5   |       | A    |
|              | Thermal Regulation                     | $T_A = 25^\circ C$ , 30ms pulse  |       | 0.008 | 0.04  | %/W  |
| SVR          | Supply Voltage Rejection               | $f = 120 \text{ Hz}$ , $C_O = 25 \mu F$ , $I_O = 3A$<br>$V_I = 7.5 \pm 3V$ | 60    | 72    |       | dB   |
| eN           | RMS Output Noise Voltage (% of $V_O$ ) | $T_A = 25^\circ C$ $f = 10\text{Hz}$ to $10\text{KHz}$                     |       | 0.003 |       | %    |
| S            | Temperature Stability                  |  |       | 0.5   |       | %    |
| S            | Long Term Stability                    | $T_A = 125^\circ C$ 1000Hrs  |       | 0.5   |       | %    |

NOTE 1: See short-circuit current curve for available output current at fixed dropout.

**ELECTRICAL CHARACTERISTICS OF LD1085#18** ( $V_I=4.8V$ ,  $C_I = C_O=10\mu F$ ,  $T_A = -40$  to  $125^\circ C$ , unless otherwise specified.)

| Symbol       | Parameter                              | Test Conditions  | Min.  | Typ.  | Max.  | Unit |
|--------------|--|--|-------|-------|-------|------|
| $V_O$        | Output Voltage                         | $I_O = 0 \text{ mA}$ $T_J = 25^\circ C$                                    | 1.782 | 1.8   | 1.818 | V    |
|              |  | $I_O = 0$ to $5A$ $V_I = 3.4$ to $30V$ (note 1)                            | 1.764 | 1.8   | 1.836 | V    |
| $\Delta V_O$ | Line Regulation                        | $I_O = 0 \text{ mA}$ $V_I = 3.4$ to $18V$ $T_J = 25^\circ C$               |       | 0.2   | 4     | mV   |
|              |  | $I_O = 0 \text{ mA}$ $V_I = 3.4$ to $15V$                                  |       | 0.4   | 4     | mV   |
| $\Delta V_O$ | Load Regulation                        | $I_O = 0$ to $3A$ $T_J = 25^\circ C$                                       |       | 2     | 10    | mV   |
|              |  | $I_O = 0$ to $3A$  |       | 4     | 20    | V    |
| $V_d$        | Dropout Voltage                        | $I_O = 3 \text{ A}$  |       | 1.3   | 1.5   | V    |
| $I_q$        | Quiescent Current                      | $V_I \leq 30V$   |       | 5     | 10    | mA   |
| $I_{sc}$     | Short Circuit Current                  | $V_I - V_O = 5V$   | 3.2   | 4.5   |       | A    |
|              |  | $V_I - V_O = 25V$  | 0.2   | 0.5   |       | A    |
|              | Thermal Regulation                     | $T_A = 25^\circ C$ , 30ms pulse  |       | 0.008 | 0.04  | %/W  |
| SVR          | Supply Voltage Rejection               | $f = 120 \text{ Hz}$ , $C_O = 25 \mu F$ , $I_O = 3A$<br>$V_I = 7.5 \pm 3V$ | 60    | 72    |       | dB   |
| eN           | RMS Output Noise Voltage (% of $V_O$ ) | $T_A = 25^\circ C$ $f = 10\text{Hz}$ to $10\text{KHz}$                     |       | 0.003 |       | %    |
| S            | Temperature Stability                  |  |       | 0.5   |       | %    |
| S            | Long Term Stability                    | $T_A = 125^\circ C$ 1000Hrs  |       | 0.5   |       | %    |

NOTE 1: See short-circuit current curve for available output current at fixed dropout.

**ELECTRICAL CHARACTERISTICS OF LD1085#25** ( $V_I=5.5V$ ,  $C_I = C_O=10\mu F$ ,  $T_A = -40$  to  $125^\circ C$ , unless otherwise specified.)

| Symbol       | Parameter                              | Test Conditions  | Min.  | Typ.  | Max.  | Unit |
|--------------|--|--|-------|-------|-------|------|
| $V_O$        | Output Voltage                         | $I_O = 0 \text{ mA}$ $T_J = 25^\circ C$                                    | 2.475 | 2.5   | 2.525 | V    |
|              |  | $I_O = 0$ to $3A$ $V_I = 4.1$ to $30V$ (note 1)                            | 2.45  | 2.5   | 2.55  | V    |
| $\Delta V_O$ | Line Regulation                        | $I_O = 0 \text{ mA}$ $V_I = 4.1$ to $18V$ $T_J = 25^\circ C$               |       | 0.2   | 4     | mV   |
|              |  | $I_O = 0 \text{ mA}$ $V_I = 4.1$ to $18V$                                  |       | 0.4   | 4     | mV   |
| $\Delta V_O$ | Load Regulation                        | $I_O = 0$ to $3A$ $T_J = 25^\circ C$                                       |       | 2     | 10    | mV   |
|              |  | $I_O = 0$ to $3A$  |       | 4     | 20    | V    |
| $V_d$        | Dropout Voltage                        | $I_O = 3A$   |       | 1.3   | 1.5   | V    |
| $I_q$        | Quiescent Current                      | $V_I \leq 30V$   |       | 5     | 10    | mA   |
| $I_{sc}$     | Short Circuit Current                  | $V_I - V_O = 5V$   | 3.2   | 4.5   |       | A    |
|              |  | $V_I - V_O = 25V$  | 0.2   | 0.5   |       | A    |
|              | Thermal Regulation                     | $T_A = 25^\circ C$ , 30ms pulse  |       | 0.008 | 0.04  | %/W  |
| SVR          | Supply Voltage Rejection               | $f = 120 \text{ Hz}$ , $C_O = 25 \mu F$ , $I_O = 3A$<br>$V_I = 7.5 \pm 3V$ | 60    | 72    |       | dB   |
| eN           | RMS Output Noise Voltage (% of $V_O$ ) | $T_A = 25^\circ C$ $f = 10\text{Hz}$ to $10\text{KHz}$                     |       | 0.003 |       | %    |
| S            | Temperature Stability                  |  |       | 0.5   |       | %    |
| S            | Long Term Stability                    | $T_A = 125^\circ C$ 1000Hrs  |       | 0.5   |       | %    |

NOTE 1: See short-circuit current curve for available output current at fixed dropout.

**ELECTRICAL CHARACTERISTICS OF LD1085#285** ( $V_I=5.85V$ ,  $C_I = C_O=10\mu F$ ,  $T_A = -40$  to  $125^\circ C$ , unless otherwise specified.)

| Symbol       | Parameter                              | Test Conditions   | Min.  | Typ.  | Max.  | Unit |
|--------------|--|---|-------|-------|-------|------|
| $V_O$        | Output Voltage                         | $I_O = 0 \text{ mA}$ $T_J = 25^\circ C$                                     | 2.821 | 2.85  | 2.879 | V    |
|              |  | $I_O = 0$ to $3A$ $V_I = 4.5$ to $30V$ (note 1)                             | 2.793 | 2.85  | 2.907 | V    |
| $\Delta V_O$ | Line Regulation                        | $I_O = 0 \text{ mA}$ $V_I = 4.5$ to $18V$ $T_J = 25^\circ C$                |       | 0.2   | 6     | mV   |
|              |  | $I_O = 0 \text{ mA}$ $V_I = 4.5$ to $18V$                                   |       | 0.5   | 6     | mV   |
| $\Delta V_O$ | Load Regulation                        | $I_O = 0$ to $3A$ $T_J = 25^\circ C$  |       | 3     | 15    | mV   |
|              |  | $I_O = 0$ to $3A$   |       | 7     | 20    | V    |
| $V_d$        | Dropout Voltage                        | $I_O = 3A$  |       | 1.3   | 1.5   | V    |
| $I_q$        | Quiescent Current                      | $V_I \leq 30V$  |       | 5     | 10    | mA   |
| $I_{sc}$     | Short Circuit Current                  | $V_I - V_O = 5V$  | 3.2   | 4.5   |       | A    |
|              |  | $V_I - V_O = 25V$   | 0.2   | 0.5   |       | A    |
|              | Thermal Regulation                     | $T_A = 25^\circ C$ , 30ms pulse   |       | 0.008 | 0.04  | %/W  |
| SVR          | Supply Voltage Rejection               | $f = 120 \text{ Hz}$ , $C_O = 25 \mu F$ , $I_O = 3A$<br>$V_I = 7.85 \pm 3V$ | 60    | 72    |       | dB   |
| eN           | RMS Output Noise Voltage (% of $V_O$ ) | $T_A = 25^\circ C$ $f = 10\text{Hz}$ to $10\text{KHz}$                      |       | 0.003 |       | %    |
| S            | Temperature Stability                  |   |       | 0.5   |       | %    |
| S            | Long Term Stability                    | $T_A = 125^\circ C$ 1000Hrs   |       | 0.5   |       | %    |

NOTE 1: See short-circuit current curve for available output current at fixed dropout.

## LD1085 SERIES

**ELECTRICAL CHARACTERISTICS OF LD1085#33** ( $V_I=6.3V$ ,  $C_I = C_O=10\mu F$ ,  $T_A = -40$  to  $125^\circ C$ , unless otherwise specified.)

| Symbol       | Parameter                              | Test Conditions  | Min.  | Typ.  | Max.  | Unit |
|--------------|--|--|-------|-------|-------|------|
| $V_O$        | Output Voltage                         | $I_O = 0 \text{ mA}$ $T_J = 25^\circ C$                                    | 3.267 | 3.3   | 3.333 | V    |
|              |  | $I_O = 0$ to $3A$ $V_I = 4.9$ to $30V$ (note 1)                            | 3.234 | 3.35  | 3.366 | V    |
| $\Delta V_O$ | Line Regulation                        | $I_O = 0 \text{ mA}$ $V_I = 4.9$ to $18V$ $T_J = 25^\circ C$               |       | 0.5   | 6     | mV   |
|              |  | $I_O = 0 \text{ mA}$ $V_I = 4.9$ to $18V$                                  |       | 1     | 6     | mV   |
| $\Delta V_O$ | Load Regulation                        | $I_O = 0$ to $3A$ $T_J = 25^\circ C$                                       |       | 3     | 15    | mV   |
|              |  | $I_O = 0$ to $3A$  |       | 7     | 20    | V    |
| $V_d$        | Dropout Voltage                        | $I_O = 3A$   |       | 1.3   | 1.5   | V    |
| $I_q$        | Quiescent Current                      | $V_I \leq 30V$   |       | 5     | 10    | mA   |
| $I_{sc}$     | Short Circuit Current                  | $V_I - V_O = 5V$   | 3.2   | 4.5   |       | A    |
|              |  | $V_I - V_O = 25V$  | 0.2   | 0.5   |       | A    |
|              | Thermal Regulation                     | $T_A = 25^\circ C$ , 30ms pulse  |       | 0.008 | 0.04  | %/W  |
| SVR          | Supply Voltage Rejection               | $f = 120 \text{ Hz}$ , $C_O = 25 \mu F$ , $I_O = 5A$<br>$V_I = 8.3 \pm 3V$ | 60    | 72    |       | dB   |
| eN           | RMS Output Noise Voltage (% of $V_O$ ) | $T_A = 25^\circ C$ $f = 10\text{Hz}$ to $10\text{KHz}$                     |       | 0.003 |       | %    |
| S            | Temperature Stability                  |  |       | 0.5   |       | %    |
| S            | Long Term Stability                    | $T_A = 125^\circ C$ 1000Hrs  |       | 0.5   |       | %    |

NOTE 1: See short-circuit current curve for available output current at fixed dropout.

**ELECTRICAL CHARACTERISTICS OF LD1085#36** ( $V_I=6.6V$ ,  $C_I = C_O=10\mu F$ ,  $T_A = -40$  to  $125^\circ C$ , unless otherwise specified.)

| Symbol       | Parameter                              | Test Conditions  | Min.  | Typ.  | Max.  | Unit |
|--------------|--|--|-------|-------|-------|------|
| $V_O$        | Output Voltage                         | $I_O = 0 \text{ mA}$ $T_J = 25^\circ C$                                    | 3.564 | 3.6   | 3.636 | V    |
|              |  | $I_O = 0$ to $3A$ $V_I = 5.2$ to $30V$ (note 1)                            | 3.528 | 3.6   | 3.672 | V    |
| $\Delta V_O$ | Line Regulation                        | $I_O = 0 \text{ mA}$ $V_I = 5.2$ to $18V$ $T_J = 25^\circ C$               |       | 0.5   | 10    | mV   |
|              |  | $I_O = 0 \text{ mA}$ $V_I = 5.2$ to $18V$                                  |       | 1     | 10    | mV   |
| $\Delta V_O$ | Load Regulation                        | $I_O = 0$ to $3A$ $T_J = 25^\circ C$                                       |       | 3     | 15    | mV   |
|              |  | $I_O = 0$ to $3A$  |       | 7     | 20    | V    |
| $V_d$        | Dropout Voltage                        | $I_O = 3A$   |       | 1.3   | 1.5   | V    |
| $I_q$        | Quiescent Current                      | $V_I \leq 30V$   |       | 5     | 10    | mA   |
| $I_{sc}$     | Short Circuit Current                  | $V_I - V_O = 5V$   | 3.2   | 4.5   |       | A    |
|              |  | $V_I - V_O = 25V$  | 0.2   | 0.5   |       | A    |
|              | Thermal Regulation                     | $T_A = 25^\circ C$ , 30ms pulse  |       | 0.008 | 0.04  | %/W  |
| SVR          | Supply Voltage Rejection               | $f = 120 \text{ Hz}$ , $C_O = 25 \mu F$ , $I_O = 3A$<br>$V_I = 8.6 \pm 3V$ | 60    | 72    |       | dB   |
| eN           | RMS Output Noise Voltage (% of $V_O$ ) | $T_A = 25^\circ C$ $f = 10\text{Hz}$ to $10\text{KHz}$                     |       | 0.003 |       | %    |
| S            | Temperature Stability                  |  |       | 0.5   |       | %    |
| S            | Long Term Stability                    | $T_A = 125^\circ C$ 1000Hrs  |       | 0.5   |       | %    |

NOTE 1: See short-circuit current curve for available output current at fixed dropout.

**ELECTRICAL CHARACTERISTICS OF LD1085#50** ( $V_I=8V$ ,  $C_I = C_O = 10\mu F$ ,  $T_A = -40$  to  $125^\circ C$ , unless otherwise specified.)

| Symbol       | Parameter                              | Test Conditions  | Min. | Typ.  | Max. | Unit |
|--------------|--|--|------|-------|------|------|
| $V_O$        | Output Voltage                         | $I_O = 0$ mA $T_J = 25^\circ C$                                  | 4.95 | 5     | 5.05 | V    |
|              |  | $I_O = 0$ to 3A $V_I = 6.6$ to 30V (note 1)                      | 4.9  | 5     | 5.1  | V    |
| $\Delta V_O$ | Line Regulation                        | $I_O = 0$ mA $V_I = 6.6$ to 20V $T_J = 25^\circ C$               |      | 0.5   | 10   | mV   |
|              |  | $I_O = 0$ mA $V_I = 6.6$ to 20V                                  |      | 1     | 10   | mV   |
| $\Delta V_O$ | Load Regulation                        | $I_O = 0$ to 3A $T_J = 25^\circ C$                               |      | 5     | 10   | mV   |
|              |  | $I_O = 0$ to 3A  |      | 10    | 35   | V    |
| $V_d$        | Dropout Voltage                        | $I_O = 3$ A  |      | 1.3   | 1.5  | V    |
| $I_q$        | Quiescent Current                      | $V_I \leq 30V$   |      | 5     | 10   | mA   |
| $I_{sc}$     | Short Circuit Current                  | $V_I - V_O = 5V$   | 3.2  | 4.5   |      | A    |
|              |  | $V_I - V_O = 25V$  | 0.2  | 0.5   |      | A    |
|              | Thermal Regulation                     | $T_A = 25^\circ C$ , 30ms pulse                                  |      | 0.008 | 0.04 | %/W  |
| SVR          | Supply Voltage Rejection               | $f = 120$ Hz, $C_O = 25 \mu F$ , $I_O = 3A$<br>$V_I = 10 \pm 3V$ | 60   | 72    |      | dB   |
| eN           | RMS Output Noise Voltage (% of $V_O$ ) | $T_A = 25^\circ C$ $f = 10$ Hz to 10KHz                          |      | 0.003 |      | %    |
| S            | Temperature Stability                  |  |      | 0.5   |      | %    |
| S            | Long Term Stability                    | $T_A = 125^\circ C$ 1000Hrs                                      |      | 0.5   |      | %    |

NOTE 1: See short-circuit current curve for available output current at fixed dropout.

**ELECTRICAL CHARACTERISTICS OF LD1085#80** ( $V_I=11V$ ,  $C_I = C_O = 10\mu F$ ,  $T_A = -40$  to  $125^\circ C$ , unless otherwise specified.)

| Symbol       | Parameter                              | Test Conditions  | Min. | Typ.  | Max. | Unit |
|--------------|--|--|------|-------|------|------|
| $V_O$        | Output Voltage                         | $I_O = 0$ mA $T_J = 25^\circ C$                                  | 7.92 | 8     | 8.08 | V    |
|              |  | $I_O = 0$ to 3A $V_I = 9.8$ to 30V (note 1)                      | 7.84 | 8     | 8.16 | V    |
| $\Delta V_O$ | Line Regulation                        | $I_O = 0$ mA $V_I = 9.8$ to 20V $T_J = 25^\circ C$               |      | 1     | 18   | mV   |
|              |  | $I_O = 0$ mA $V_I = 9.8$ to 20V                                  |      | 2     | 18   | mV   |
| $\Delta V_O$ | Load Regulation                        | $I_O = 0$ to 3A $T_J = 25^\circ C$                               |      | 8     | 30   | mV   |
|              |  | $I_O = 0$ to 3A  |      | 12    | 60   | V    |
| $V_d$        | Dropout Voltage                        | $I_O = 3$ A  |      | 1.3   | 1.5  | V    |
| $I_q$        | Quiescent Current                      | $V_I \leq 30V$   |      | 5     | 10   | mA   |
| $I_{sc}$     | Short Circuit Current                  | $V_I - V_O = 5V$   | 3.2  | 4.5   |      | A    |
|              |  | $V_I - V_O = 25V$  | 0.2  | 0.5   |      | A    |
|              | Thermal Regulation                     | $T_A = 25^\circ C$ , 30ms pulse                                  |      | 0.008 | 0.04 | %/W  |
| SVR          | Supply Voltage Rejection               | $f = 120$ Hz, $C_O = 25 \mu F$ , $I_O = 3A$<br>$V_I = 13 \pm 3V$ | 54   | 71    |      | dB   |
| eN           | RMS Output Noise Voltage (% of $V_O$ ) | $T_A = 25^\circ C$ $f = 10$ Hz to 10KHz                          |      | 0.003 |      | %    |
| S            | Temperature Stability                  |  |      | 0.5   |      | %    |
| S            | Long Term Stability                    | $T_A = 125^\circ C$ 1000Hrs                                      |      | 0.5   |      | %    |

NOTE 1: See short-circuit current curve for available output current at fixed dropout.

## LD1085 SERIES

**ELECTRICAL CHARACTERISTICS OF LD1085#90** ( $V_I=12V$ ,  $C_I = C_O=10\mu F$ ,  $T_A = -40$  to  $125^\circ C$ , unless otherwise specified.)

| Symbol       | Parameter                              | Test Conditions  | Min. | Typ.  | Max. | Unit |
|--------------|--|--|------|-------|------|------|
| $V_O$        | Output Voltage                         | $I_O = 0$ mA $T_J = 25^\circ C$                                  | 8.91 | 9     | 9.09 | V    |
|              |  | $I_O = 0$ to 3A $V_I = 11$ to 30V (note 1)                       | 8.82 | 9     | 9.18 | V    |
| $\Delta V_O$ | Line Regulation                        | $I_O = 0$ mA $V_I = 11$ to 20V $T_J = 25^\circ C$                |      | 1     | 20   | mV   |
|              |  | $I_O = 0$ mA $V_I = 11$ to 20V                                   |      | 2     | 20   | mV   |
| $\Delta V_O$ | Load Regulation                        | $I_O = 0$ to 3A $T_J = 25^\circ C$                               |      | 8     | 30   | mV   |
|              |  | $I_O = 0$ to 3A  |      | 12    | 60   | V    |
| $V_d$        | Dropout Voltage                        | $I_O = 3$ A  |      | 1.3   | 1.5  | V    |
| $I_q$        | Quiescent Current                      | $V_I \leq 30V$   |      | 5     | 10   | mA   |
| $I_{sc}$     | Short Circuit Current                  | $V_I - V_O = 5V$   | 3.2  | 4.5   |      | A    |
|              |  | $V_I - V_O = 25V$  | 0.2  | 0.5   |      | A    |
|              | Thermal Regulation                     | $T_A = 25^\circ C$ , 30ms pulse                                  |      | 0.008 | 0.04 | %/W  |
| SVR          | Supply Voltage Rejection               | $f = 120$ Hz, $C_O = 25 \mu F$ , $I_O = 3A$<br>$V_I = 14 \pm 3V$ | 54   | 70    |      | dB   |
| eN           | RMS Output Noise Voltage (% of $V_O$ ) | $T_A = 25^\circ C$ $f = 10$ Hz to 10KHz                          |      | 0.003 |      | %    |
| S            | Temperature Stability                  |  |      | 0.5   |      | %    |
| S            | Long Term Stability                    | $T_A = 125^\circ C$ 1000Hrs                                      |      | 0.5   |      | %    |

NOTE 1: See short-circuit current curve for available output current at fixed dropout.

**ELECTRICAL CHARACTERISTICS OF LD1085#120** ( $V_I=15V$ ,  $C_I = C_O=10\mu F$ ,  $T_A = -40$  to  $125^\circ C$ , unless otherwise specified.)

| Symbol       | Parameter                              | Test Conditions  | Min.  | Typ.  | Max.  | Unit |
|--------------|--|--|-------|-------|-------|------|
| $V_O$        | Output Voltage                         | $I_O = 0$ mA $T_J = 25^\circ C$                                  | 11.88 | 12    | 12.12 | V    |
|              |  | $I_O = 0$ to 3A $V_I = 13.8$ to 30V (note 1)                     | 11.76 | 12    | 12.24 | V    |
| $\Delta V_O$ | Line Regulation                        | $I_O = 0$ mA $V_I = 13.8$ to 25V $T_J = 25^\circ C$              |       | 1     | 25    | mV   |
|              |  | $I_O = 0$ mA $V_I = 13.8$ to 25V                                 |       | 2     | 25    | mV   |
| $\Delta V_O$ | Load Regulation                        | $I_O = 0$ to 3A $T_J = 25^\circ C$                               |       | 12    | 36    | mV   |
|              |  | $I_O = 0$ to 3A  |       | 24    | 72    | V    |
| $V_d$        | Dropout Voltage                        | $I_O = 3$ A  |       | 1.3   | 1.5   | V    |
| $I_q$        | Quiescent Current                      | $V_I \leq 30V$   |       | 5     | 10    | mA   |
| $I_{sc}$     | Short Circuit Current                  | $V_I - V_O = 5V$   | 3.2   | 4.5   |       | A    |
|              |  | $V_I - V_O = 25V$  | 0.2   | 0.5   |       | A    |
|              | Thermal Regulation                     | $T_A = 25^\circ C$ , 30ms pulse                                  |       | 0.008 | 0.04  | %/W  |
| SVR          | Supply Voltage Rejection               | $f = 120$ Hz, $C_O = 25 \mu F$ , $I_O = 3A$<br>$V_I = 17 \pm 3V$ | 54    | 66    |       | dB   |
| eN           | RMS Output Noise Voltage (% of $V_O$ ) | $T_A = 25^\circ C$ $f = 10$ Hz to 10KHz                          |       | 0.003 |       | %    |
| S            | Temperature Stability                  |  |       | 0.5   |       | %    |
| S            | Long Term Stability                    | $T_A = 125^\circ C$ 1000Hrs                                      |       | 0.5   |       | %    |

NOTE 1: See short-circuit current curve for available output current at fixed dropout.



**ELECTRICAL CHARACTERISTICS OF LD1085#** ( $V_I=4.25V$ ,  $C_I = C_O = 10\mu F$ ,  $T_A = -40$  to  $125^\circ C$ , unless otherwise specified.)

| Symbol           | Parameter                                 | Test Conditions   | Min.  | Typ.  | Max.  | Unit    |
|------------------|---|---|-------|-------|-------|---------|
| $V_O$            | Output Voltage                            | $I_O = 10mA$ $T_J = 25^\circ C$   | 1.237 | 1.25  | 1.263 | V       |
|                  |   | $I_O = 10mA$ to $5A$ $V_I = 2.85$ to $30V$ (note 1)                                       | 1.225 | 1.25  | 1.275 | V       |
| $\Delta V_O$     | Line Regulation                           | $I_O = 10mA$ $V_I = 2.85$ to $16.5V$ $T_J = 25^\circ C$                                   |       | 0.015 | 0.2   | %       |
|                  |   | $I_O = 10mA$ $V_I = 2.85$ to $16.5V$  |       | 0.035 | 0.2   | %       |
| $\Delta V_O$     | Load Regulation                           | $I_O = 10mA$ to $5A$ $T_J = 25^\circ C$   |       | 0.1   | 0.3   | %       |
|                  |   | $I_O = 0$ to $5A$   |       | 0.2   | 0.4   | %       |
| $V_d$            | Dropout Voltage                           | $I_O = 5A$  |       | 1.3   | 1.5   | V       |
| $I_{O(min)}$     | Minimum Load Current                      | $V_I = 30V$   |       | 3     | 10    | mA      |
| $I_{sc}$         | Short Circuit Current                     | $V_I - V_O = 5V$  | 5.5   | 6.5   |       | A       |
|                  |   | $V_I - V_O = 25V$   | 0.5   | 0.7   |       | A       |
|                  | Thermal Regulation                        | $T_A = 25^\circ C$ , 30ms pulse   |       | 0.003 | 0.015 | %/W     |
| SVR              | Supply Voltage Rejection                  | $f = 120$ Hz, $C_O = 25 \mu F$ , $C_{ADJ} = 25 \mu F$ ,<br>$I_O = 5A$ $V_I = 6.25 \pm 3V$ | 60    | 72    |       | dB      |
| $I_{ADJ}$        | Adjust Pin Current                        | $V_I = 4.25V$ $I_O = 10$ mA   |       | 55    | 120   | $\mu A$ |
| $\Delta I_{ADJ}$ | Adjust Pin Current Change                 | $I_O = 10mA$ to $5A$ $V_I = 2.85$ to $16.5V$<br>(note 1)                                  |       | 0.2   | 5     | $\mu A$ |
| eN               | RMS Output Noise Voltage<br>(% of $V_O$ ) | $T_A = 25^\circ C$ $f = 10Hz$ to $10KHz$  |       | 0.003 |       | %       |
| S                | Temperature Stability                     |   |       | 0.5   |       | %       |
| S                | Long Term Stability                       | $T_A = 125^\circ C$ 1000Hrs   |       | 0.5   |       | %       |

NOTE 1: See short-circuit current curve for available output current at fixed dropout.

TYPICAL CHARACTERISTICS (unless otherwise specified  $T_j = 25^\circ\text{C}$ ,  $C_i=C_o=10\mu\text{F}$ )

Figure 1 : Output Voltage vs Temperature

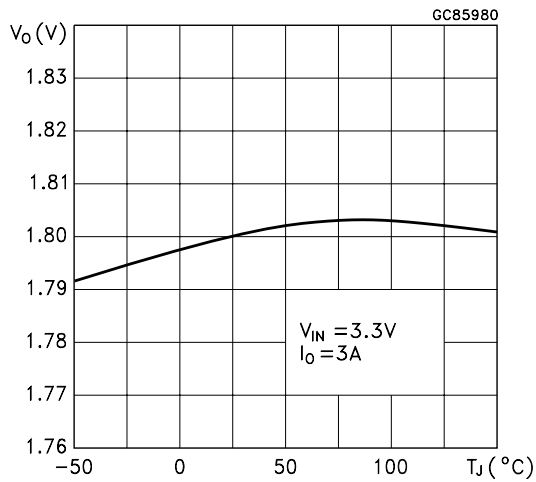


Figure 2 : Output Voltage vs Temperature

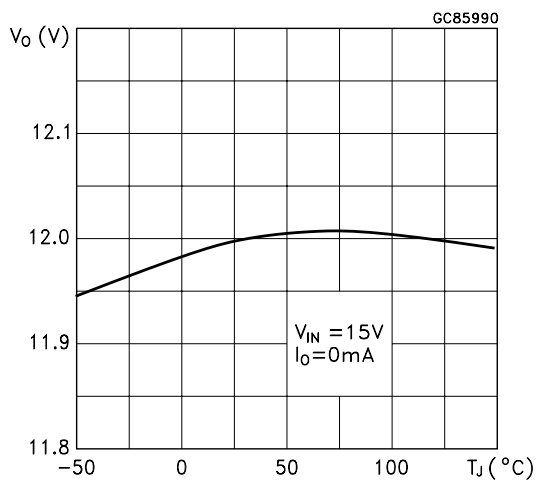


Figure 3 : Output Voltage vs Temperature

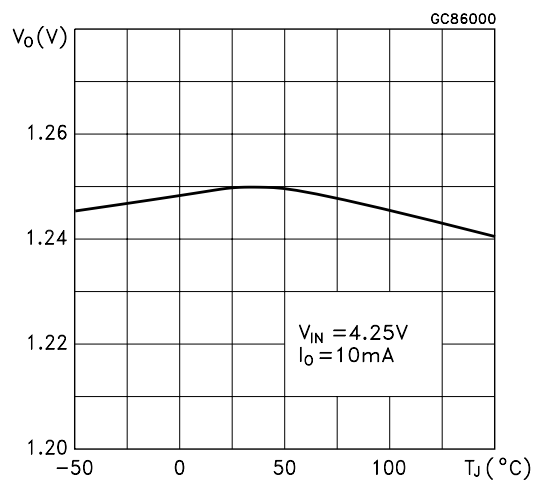


Figure 4 : Short Circuit Current vs Dropout Voltage

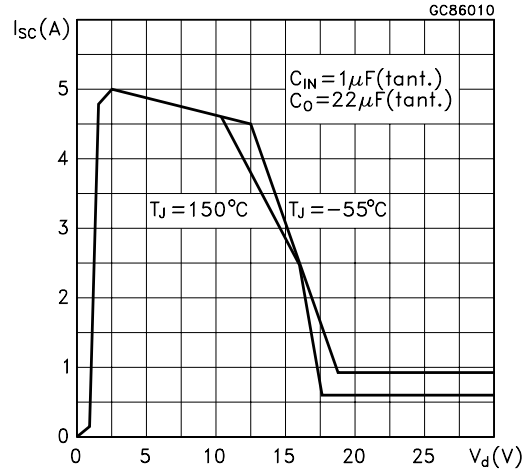


Figure 5 : Line Regulation vs Temperature

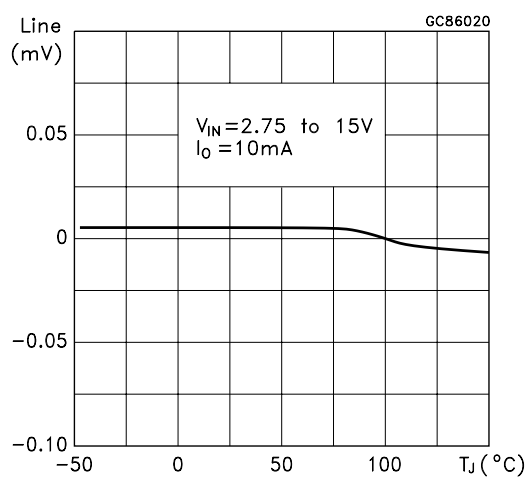


Figure 6 : Load Regulation vs Temperature

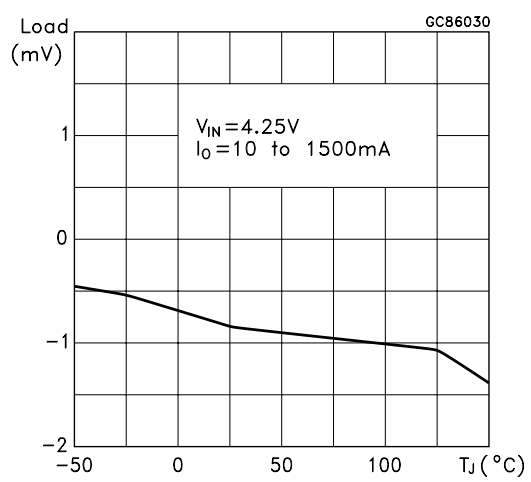


Figure 7 : Dropout Voltage vs Temperature

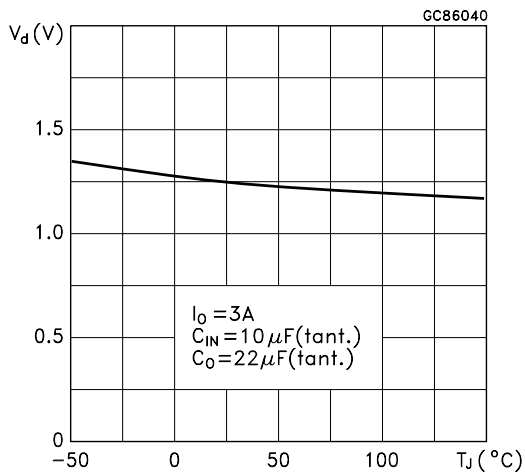


Figure 10 : Quiescent Current vs Temperature

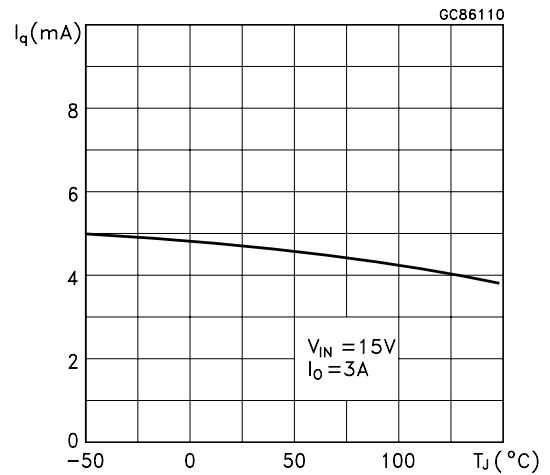


Figure 8 : Dropout Voltage vs Output Current

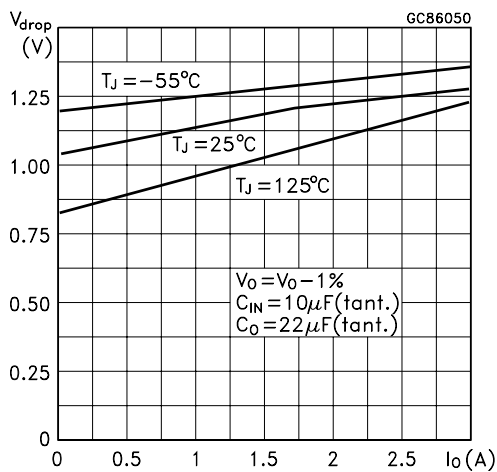


Figure 11 : Dropout Voltage vs Output Current

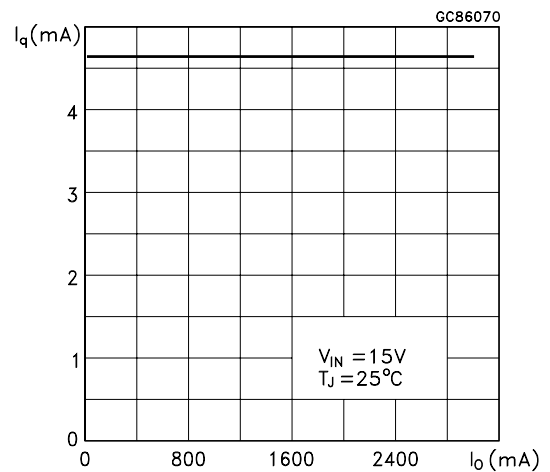


Figure 9 : Adjust Pin Current vs Temperature



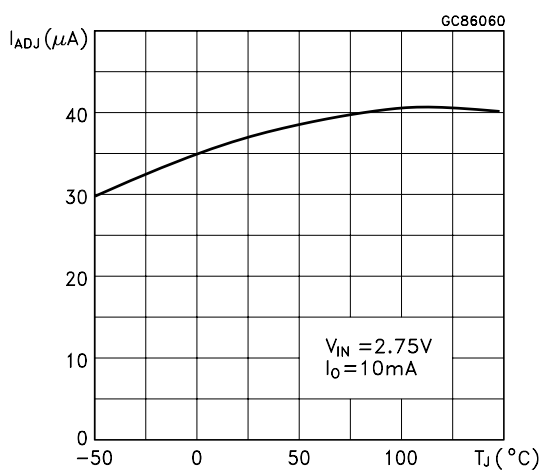



Figure 12 : Supply Voltage Rejection vs Output Current

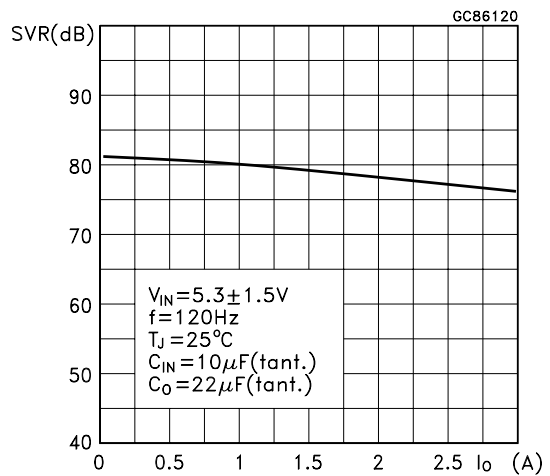


**Figure 13 : Supply Voltage Rejection vs Frequency**

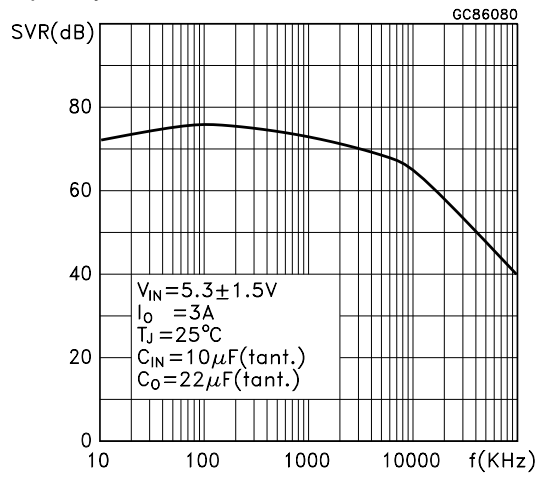

**Figure 15 : Minimum Load Current vs Temperature**

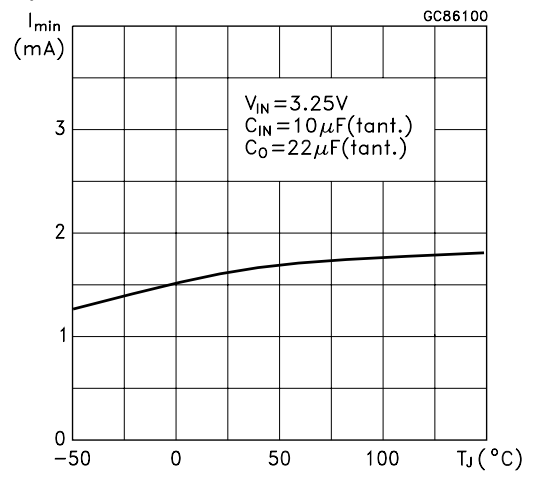

**Figure 14 : Supply Voltage Rejection vs Temperature**

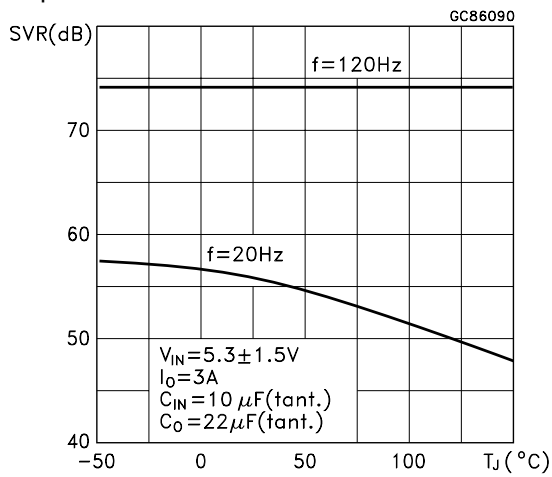

**Figure 16 : Stability**

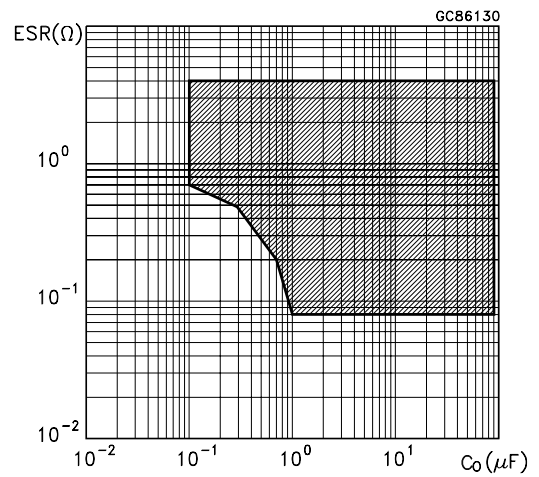


Figure 17 : Stability

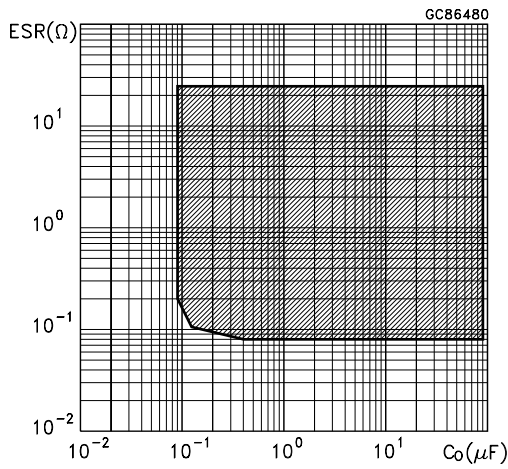


Figure 18 : Line Transient

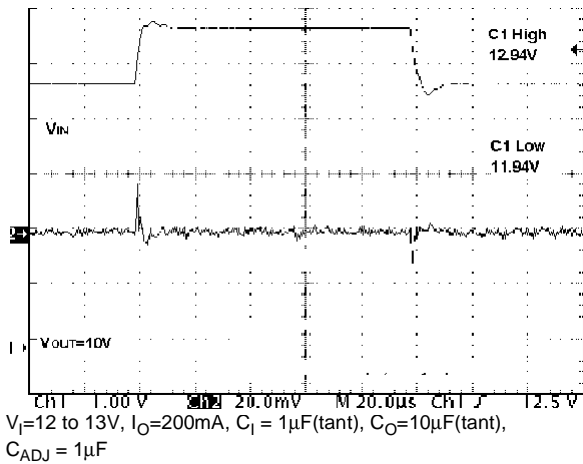


Figure 19 : Line Transient

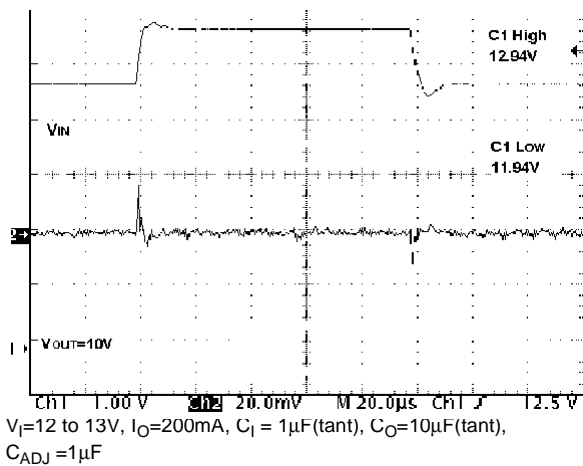


Figure 20 : Load Transient



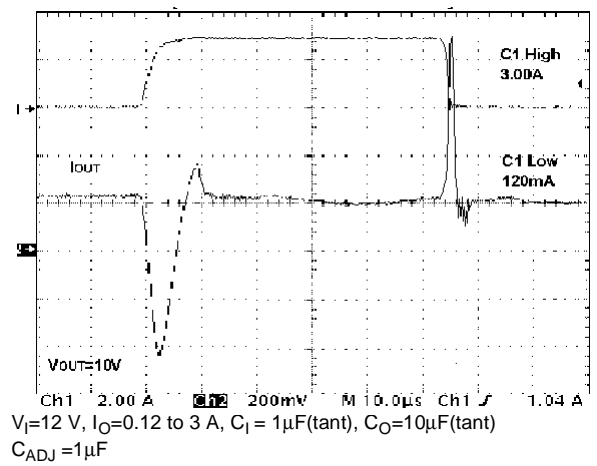


Figure 21 : Load Transient

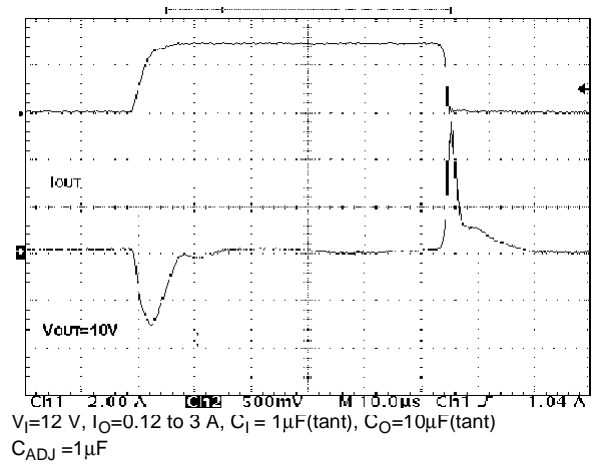

TO-220 MECHANICAL DATA


| DIM. | mm.   |      |       | inch  |       |       |
|------|-------|------|-------|-------|-------|-------|
|      | MIN.  | TYP. | MAX.  | MIN.  | TYP.  | MAX.  |
| A    | 4.40  |      | 4.60  | 0.173 |       | 0.181 |
| C    | 1.23  |      | 1.32  | 0.048 |       | 0.051 |
| D    | 2.40  |      | 2.72  | 0.094 |       | 0.107 |
| D1   |       | 1.27 |       |       | 0.050 |       |
| E    | 0.49  |      | 0.70  | 0.019 |       | 0.027 |
| F    | 0.61  |      | 0.88  | 0.024 |       | 0.034 |
| F1   | 1.14  |      | 1.70  | 0.044 |       | 0.067 |
| F2   | 1.14  |      | 1.70  | 0.044 |       | 0.067 |
| G    | 4.95  |      | 5.15  | 0.194 |       | 0.203 |
| G1   | 2.4   |      | 2.7   | 0.094 |       | 0.106 |
| H2   | 10.0  |      | 10.40 | 0.393 |       | 0.409 |
| L2   |       | 16.4 |       |       | 0.645 |       |
| L4   | 13.0  |      | 14.0  | 0.511 |       | 0.551 |
| L5   | 2.65  |      | 2.95  | 0.104 |       | 0.116 |
| L6   | 15.25 |      | 15.75 | 0.600 |       | 0.620 |
| L7   | 6.2   |      | 6.6   | 0.244 |       | 0.260 |
| L9   | 3.5   |      | 3.93  | 0.137 |       | 0.154 |
| DIA. | 3.75  |      | 3.85  | 0.147 |       | 0.151 |

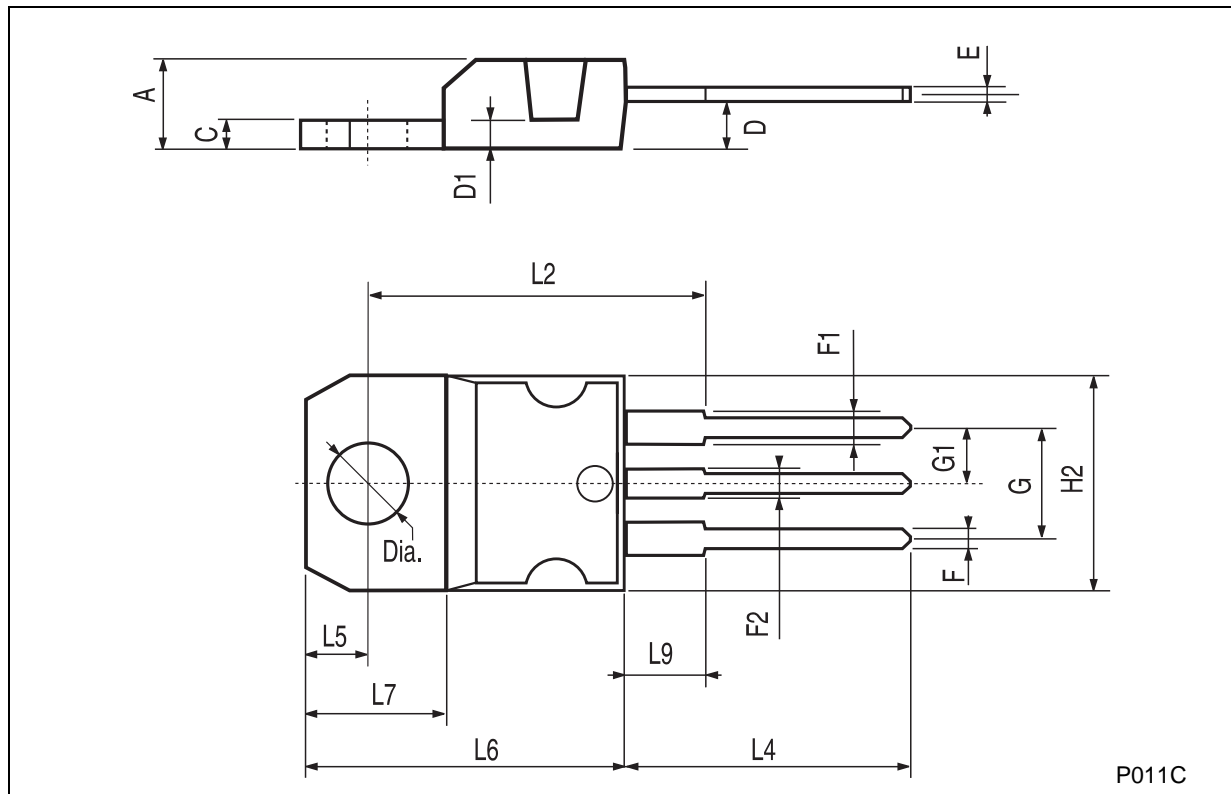

P011C

## TO-220FP MECHANICAL DATA


| DIM. | mm.  |     |       | inch  |       |       |
|------|------|-----|-------|-------|-------|-------|
|      | MIN. | TYP | MAX.  | MIN.  | TYP.  | MAX.  |
| A    | 4.40 |     | 4.60  | 0.173 |       | 0.181 |
| B    | 2.5  |     | 2.7   | 0.098 |       | 0.106 |
| D    | 2.5  |     | 2.75  | 0.098 |       | 0.108 |
| E    | 0.45 |     | 0.70  | 0.017 |       | 0.027 |
| F    | 0.75 |     | 1     | 0.030 |       | 0.039 |
| F1   | 1.15 |     | 1.50  | 0.045 |       | 0.059 |
| F2   | 1.15 |     | 1.50  | 0.045 |       | 0.059 |
| G    | 4.95 |     | 5.2   | 0.194 |       | 0.204 |
| G1   | 2.4  |     | 2.7   | 0.094 |       | 0.106 |
| H    | 10.0 |     | 10.40 | 0.393 |       | 0.409 |
| L2   |      | 16  |       |       | 0.630 |       |
| L3   | 28.6 |     | 30.6  | 1.126 |       | 1.204 |
| L4   | 9.8  |     | 10.6  | 0.385 |       | 0.417 |
| L6   | 15.9 |     | 16.4  | 0.626 |       | 0.645 |
| L7   | 9    |     | 9.3   | 0.354 |       | 0.366 |
| DIA. | 3    |     | 3.2   | 0.118 |       | 0.126 |

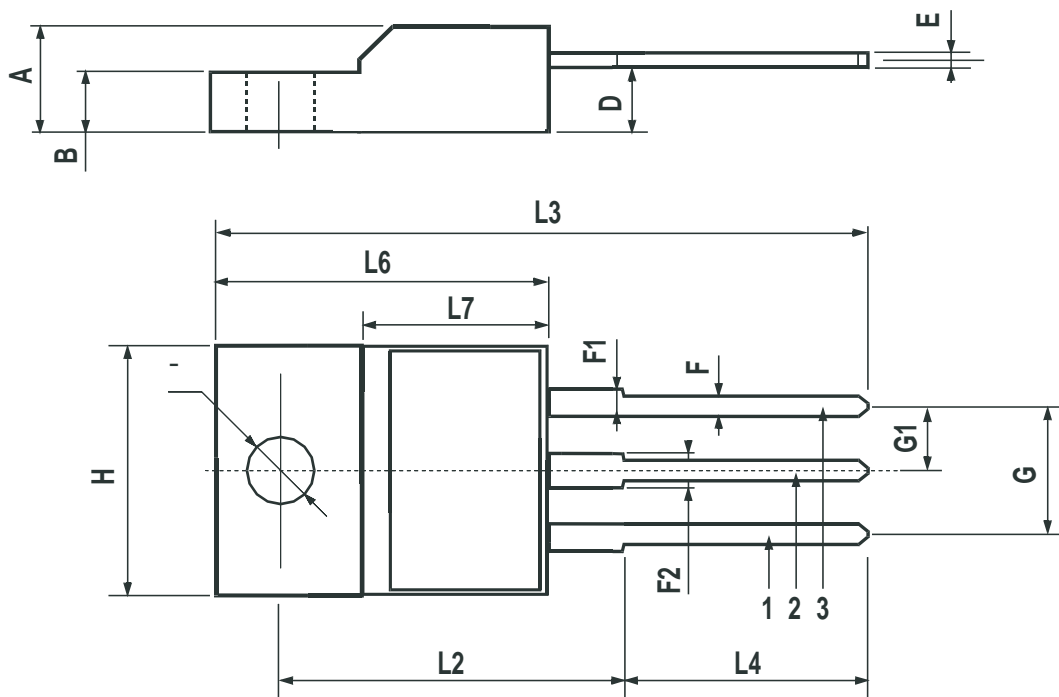

7012510/F

**D<sup>2</sup>PAK MECHANICAL DATA**


| DIM. | mm.  |     |       | inch  |       |       |
|------|------|-----|-------|-------|-------|-------|
|      | MIN. | TYP | MAX.  | MIN.  | TYP.  | MAX.  |
| A    | 4.4  |     | 4.6   | 0.173 |       | 0.181 |
| A1   | 2.49 |     | 2.69  | 0.098 |       | 0.106 |
| A2   | 0.03 |     | 0.23  | 0.001 |       | 0.009 |
| B    | 0.7  |     | 0.93  | 0.027 |       | 0.036 |
| B2   | 1.14 |     | 1.7   | 0.044 |       | 0.067 |
| C    | 0.45 |     | 0.6   | 0.017 |       | 0.023 |
| C2   | 1.23 |     | 1.36  | 0.048 |       | 0.053 |
| D    | 8.95 |     | 9.35  | 0.352 |       | 0.368 |
| D1   |      | 8   |       |       | 0.315 |       |
| E    | 10   |     | 10.4  | 0.393 |       | 0.409 |
| E1   |      | 8.5 |       |       | 0.335 |       |
| G    | 4.88 |     | 5.28  | 0.192 |       | 0.208 |
| L    | 15   |     | 15.85 | 0.590 |       | 0.624 |
| L2   | 1.27 |     | 1.4   | 0.050 |       | 0.055 |
| L3   | 1.4  |     | 1.75  | 0.055 |       | 0.068 |
| M    | 2.4  |     | 3.2   | 0.094 |       | 0.126 |
| R    |      | 0.4 |       |       | 0.016 |       |
| V2   | 0°   |     | 8°    | 0°    |       | 8°    |

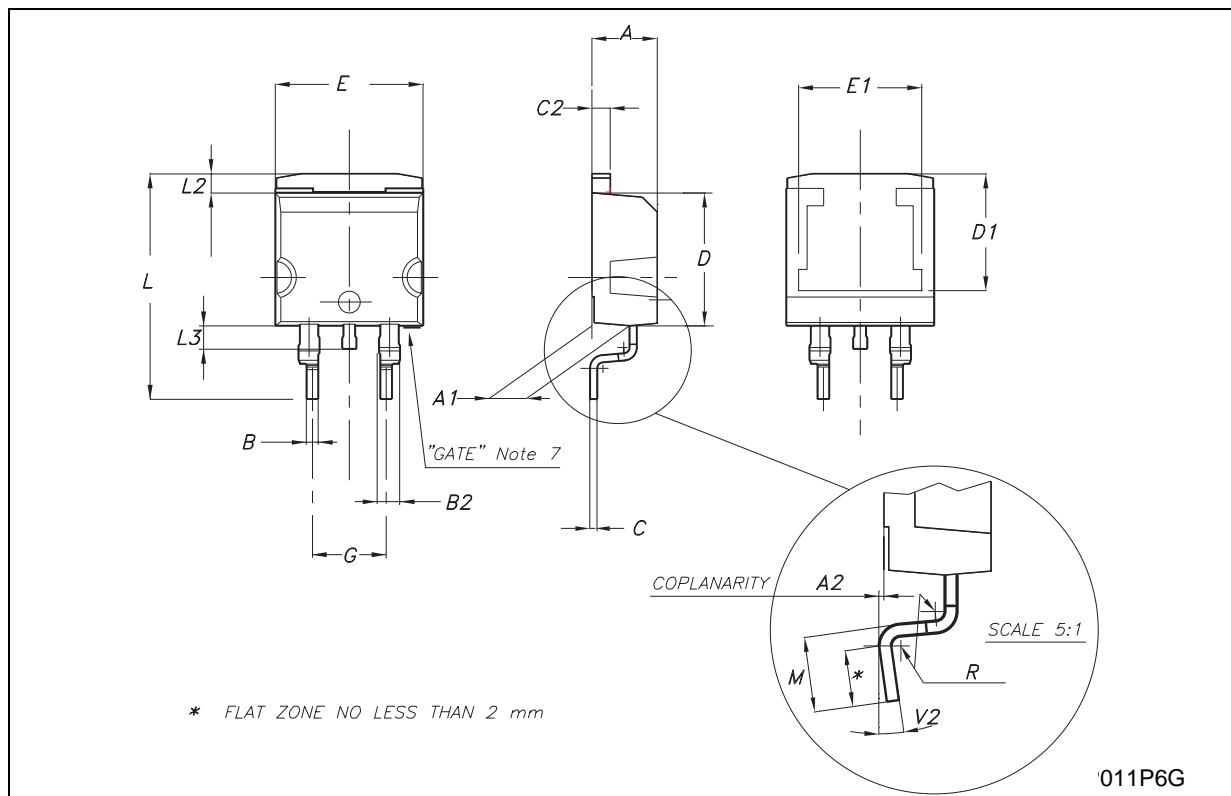




D<sup>2</sup>PAK/A MECHANICAL DATA

| DIM. | mm.  |      |       | inch  |      |       |
|------|------|------|-------|-------|------|-------|
|      | MIN. | TYP. | MAX.  | MIN.  | TYP. | MAX.  |
| A    | 4.40 |      | 4.60  | 0.173 |      | 0.181 |
| A1   | 2.49 |      | 2.69  | 0.098 |      | 0.106 |
| B    | 0.7  |      | 0.93  | 0.027 |      | 0.036 |
| B2   | 1.14 |      | 1.7   | 0.044 |      | 0.067 |
| C    | 0.45 |      | 0.60  | 0.017 |      | 0.023 |
| C2   | 1.21 |      | 1.36  | 0.047 |      | 0.053 |
| D    | 8.95 |      | 9.35  | 0.352 |      | 0.368 |
| E    | 10   |      | 10.4  | 0.393 |      | 0.409 |
| G    | 4.88 |      | 5.28  | 0.192 |      | 0.208 |
| L    | 15   |      | 15.85 | 0.590 |      | 0.106 |
| L2   | 1.27 |      | 1.4   | 0.050 |      | 0.055 |

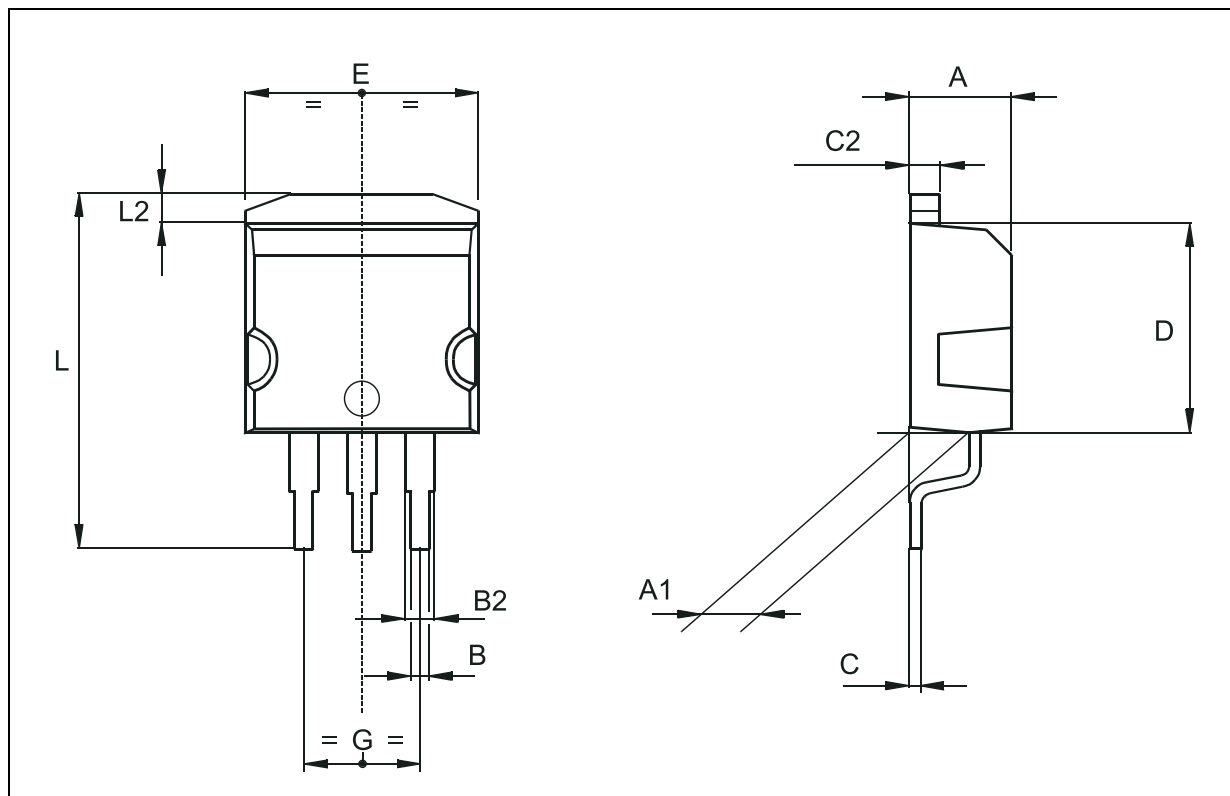

**Tape & Reel D<sup>2</sup>PAK-P<sup>2</sup>PAK-D<sup>2</sup>PAK/A-P<sup>2</sup>PAK/A MECHANICAL DATA**

| DIM. | mm.   |       |       | inch  |       |       |
|------|-------|-------|-------|-------|-------|-------|
|      | MIN.  | TYP   | MAX.  | MIN.  | TYP.  | MAX.  |
| A    |       |       | 180   |       |       | 7.086 |
| C    | 12.8  | 13.0  | 13.2  | 0.504 | 0.512 | 0.519 |
| D    | 20.2  |       |       | 0.795 |       |       |
| N    | 60    |       |       | 2.362 |       |       |
| T    |       |       | 14.4  |       |       | 0.567 |
| Ao   | 10.50 | 10.6  | 10.70 | 0.413 | 0.417 | 0.421 |
| Bo   | 15.70 | 15.80 | 15.90 | 0.618 | 0.622 | 0.626 |
| Ko   | 4.80  | 4.90  | 5.00  | 0.189 | 0.193 | 0.197 |
| Po   | 3.9   | 4.0   | 4.1   | 0.153 | 0.157 | 0.161 |
| P    | 11.9  | 12.0  | 12.1  | 0.468 | 0.472 | 0.476 |

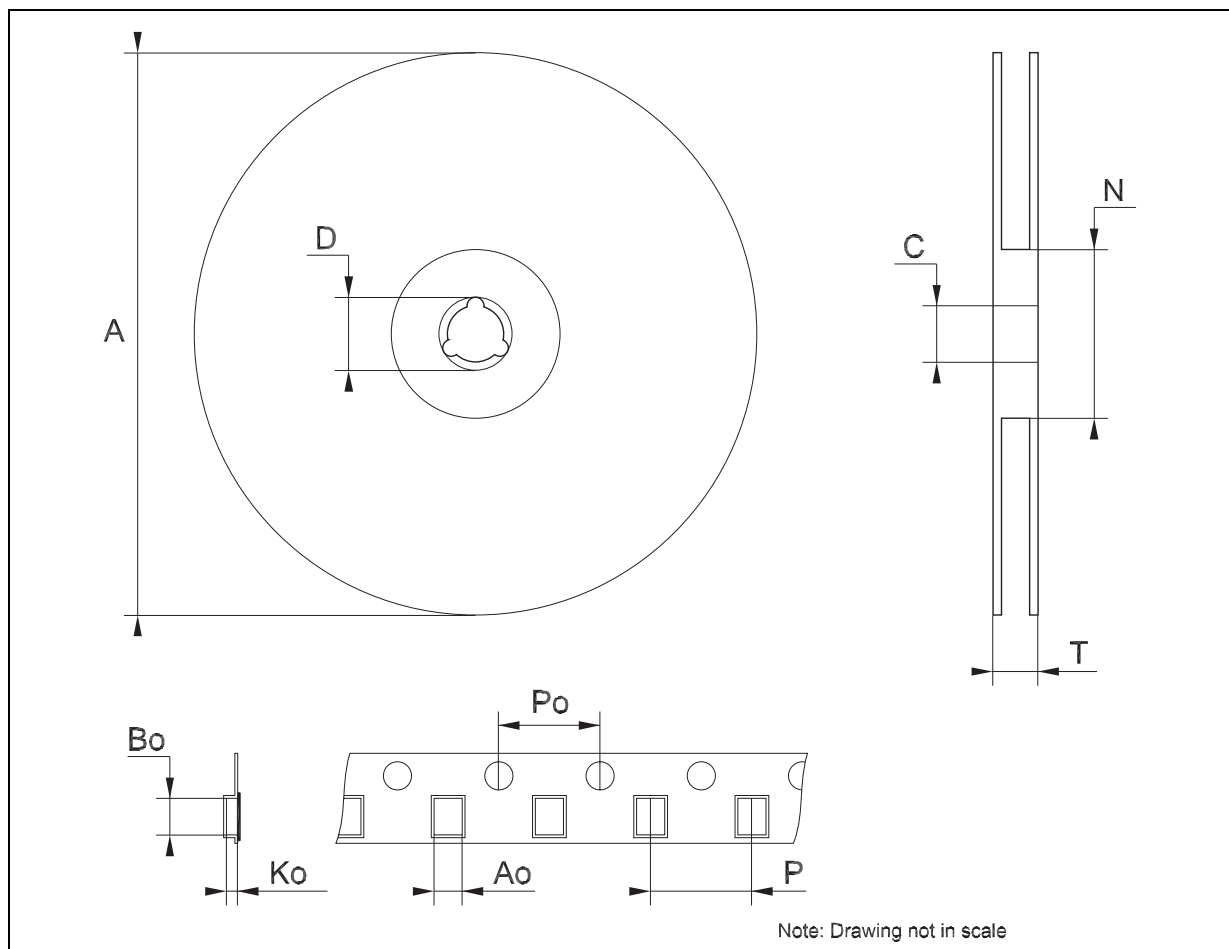

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

© The ST logo is a registered trademark of STMicroelectronics

© 2003 STMicroelectronics - Printed in Italy - All Rights Reserved  
STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco  
Singapore - Spain - Sweden - Switzerland - United Kingdom - United States.

© <http://www.st.com>

