

16 x 16 matrix displays

LM-2256 Series

The LM-2256 series are 16 x 16 matrix displays which can be used in a wide variety of applications, including alpha-bet, numeric, symbol, and graphic displays. Red is available, as well as a dual-color red / green type.


●Application

Light sources for displays

●Features

- 1) 16 x 16 dot matrix
Circular emitters.
- 2) External dimensions : 4.064 x40.64 x 5.5mm
- 3) Emitters : Circular, 2.0mm diameter
- 4) Black package.

●Dimensions (Unit: mm)

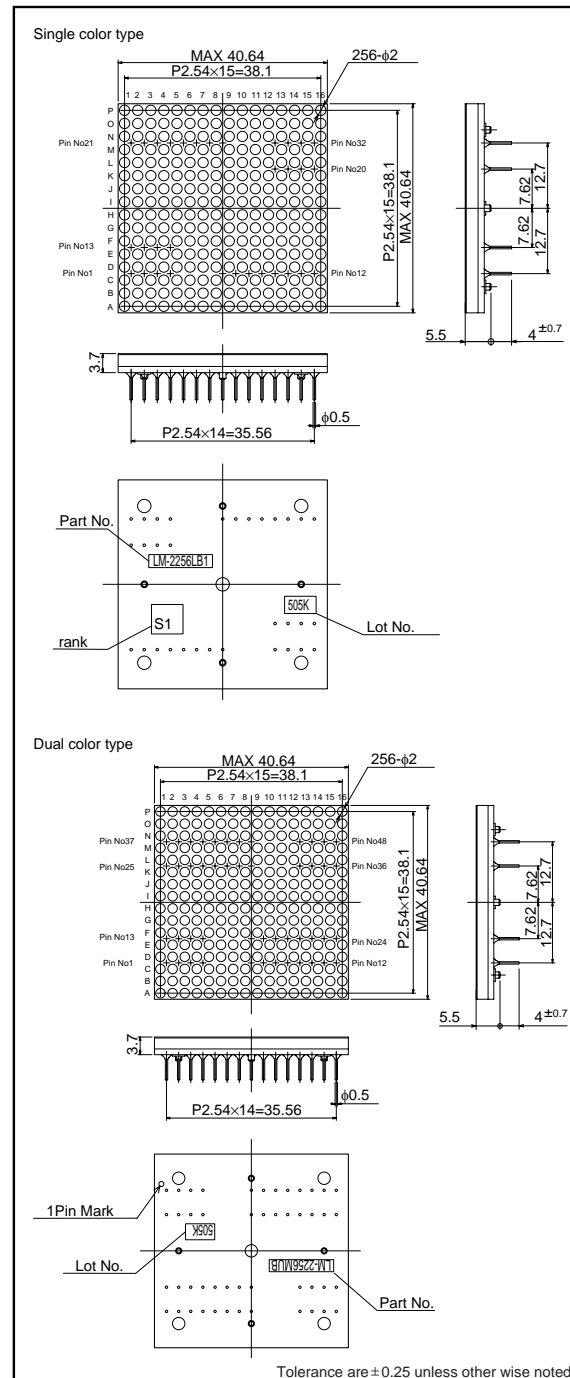


LED displays


● Selection guide

Emitting color	Red	Red / Green
	Common	
Anode	—	LM-2256MUB
Cathode	LM-2256LB1	—

● Pin assignments (Top view)

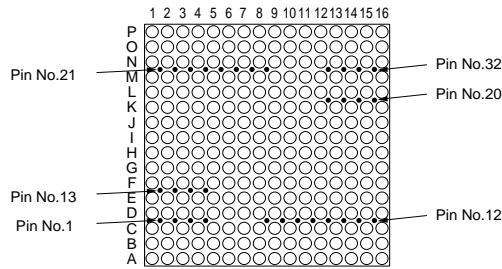


Single color type

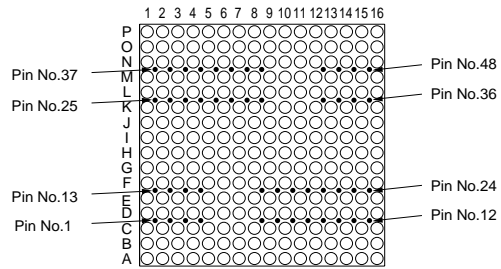


Dual color type

● Internal circuit schematic

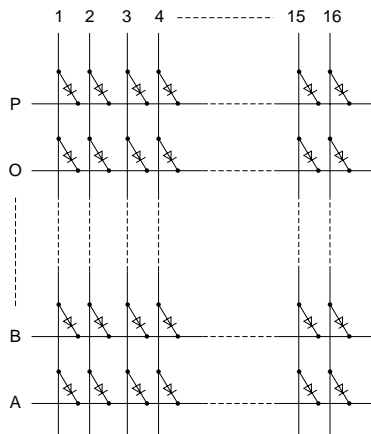

Single color type

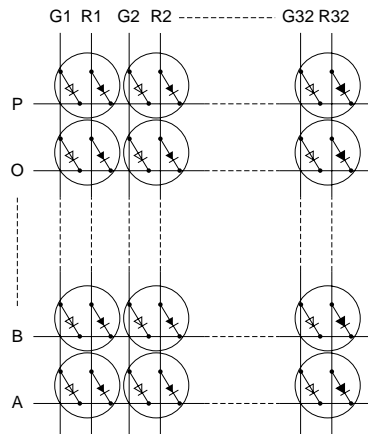

—|> GREEN
—|> RED

Dual color type

LED displays

●Pin assignment table

Single-color type

Pin No.	Function	Pin No.	Function
1	A Cathode	17	J Cathode
2	C Cathode	18	L Cathode
3	D Cathode	19	K Cathode
4	B Cathode	20	I Cathode
5	9 Anode	21	1 Anode
6	10 Anode	22	2 Anode
7	11 Anode	23	3 Anode
8	12 Anode	24	4 Anode
9	13 Anode	25	5 Anode
10	14 Anode	26	6 Anode
11	15 Anode	27	7 Anode
12	16 Anode	28	8 Anode
13	H Cathode	29	O Cathode
14	F Cathode	30	M Cathode
15	E Cathode	31	N Cathode
16	G Cathode	32	P Cathode

Dual – color type

Pin No.	Function	Pin No.	Function
1	A Cathode	25	R1 Anode
2	C Cathode	26	R2 Anode
3	D Cathode	27	R3 Anode
4	B Cathode	28	R4 Anode
5	G9 Anode	29	R5 Anode
6	G10 Anode	30	R6 Anode
7	G11 Anode	31	R7 Anode
8	G12 Anode	32	R8 Anode
9	G13 Anode	33	J Cathode
10	G14 Anode	34	L Cathode
11	G15 Anode	35	K Cathode
12	G16 Anode	36	I Cathode
13	H Cathode	37	G1 Anode
14	F Cathode	38	G2 Anode
15	E Cathode	39	G3 Anode
16	G Cathode	40	G4 Anode
17	R9 Anode	41	G5 Anode
18	R10 Anode	42	G6 Anode
19	R11 Anode	43	G7 Anode
20	R12 Anode	44	G8 Anode
21	R13 Anode	45	O Cathode
22	R14 Anode	46	M Cathode
23	R15 Anode	47	N Cathode
24	R16 Anode	48	P Cathode

●Absolute maximum ratings (Ta=25°C)

Single – color type

Parameter	Symbol	LB1	Unit
		Red	
Power dissipation	P _D	50	mW/dot
Forward current	I _F	20	mA/dot
Peak forward current	I _{FP}	60*	mA/dot
Reverse voltage	V _R	3	V
Operating temperature	Topr	-20 to +60	°C
Storage temperature	Tstg	-25 to +85	°C

* Pulse width 1msec duty 1 / 16

Dual – color type

Parameter	Symbol	MUB		Unit
		Red	Green	
Power dissipation	P _D	42	42	mW/dot
Forward current	I _F	15	15	mA/dot
Peak forward current	I _{FP}	60*	60*	mA/dot
Reverse voltage	V _R	4	4	V
Operating temperature	Topr	-20 to +50		°C
Storage temperature	Tstg	-30 to +75		°C

*Pulse width 1msec duty 1 / 16

LED displays

●Electrical and optical characteristics (Ta=25°C)

Single – color type

Parameter	Symbol	Conditions	LB1			Unit
			Red			
			Min.	Typ.	Max.	
Forward voltage	V_F	$I_F=20\text{mA}$	–	1.75	2.5	V
Forward current	I_R	$V_R=3\text{V}$	–	–	100	μA
Peak wavelength	λ_P	$I_F=20\text{mA}$	–	660	–	nm
Spectral half-power bandwidth	$\Delta\lambda$	$I_F=20\text{mA}$	–	25	–	nm

©Not designed for radiation resistance.

Parameter	Symbol	Conditions	MB			Unit
			Green			
			Min.	Typ.	Max.	
Forward voltage	V_F	$I_F=10\text{mA}$	–	2.1	2.8	V
Forward current	I_R	$V_R=3\text{V}$	–	–	100	μA
Peak wavelength	λ_P	$I_F=10\text{mA}$	–	563	–	nm
Spectral half-power bandwidth	$\Delta\lambda$	$I_F=10\text{mA}$	–	40	–	nm

©Not designed for radiation resistance.

Dual – color type

Parameter	Symbol	Conditions	MUB						Unit
			Red			Green			
			Min.	Typ.	Max.	Min.	Typ.	Max.	
Forward voltage	V_F	$I_F=10\text{mA}$	–	2	2.8	–	2.1	2.8	V
Reverse current	I_R	$V_R=3\text{V}$	–	–	100	–	–	100	μA
Peak wavelength	λ_P	$I_F=10\text{mA}$	–	635	–	–	563	–	nm
Spectral half-power bandwidth	$\Delta\lambda$	$I_F=10\text{mA}$	–	40	–	–	40	–	nm

©Not designed for radiation resistance.

●Luminous intensity

Color	Type	Min.	Typ.	Max.	Unit
Red	LB1	36	72	–	mcd
Red	MUB	0.22	0.63	–	mcd
Green		0.56	1.6	–	mcd

Note : Measured at $I_F = 10\text{mA}$ (LB1 : $I_F=20\text{mA}$)

Notes

- No technical content pages of this document may be reproduced in any form or transmitted by any means without prior permission of ROHM CO.,LTD.
- The contents described herein are subject to change without notice. The specifications for the product described in this document are for reference only. Upon actual use, therefore, please request that specifications to be separately delivered.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard use and operation. Please pay careful attention to the peripheral conditions when designing circuits and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or otherwise dispose of the same, no express or implied right or license to practice or commercially exploit any intellectual property rights or other proprietary rights owned or controlled by
- ROHM CO., LTD. is granted to any such buyer.
- Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).

Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

About Export Control Order in Japan

Products described herein are the objects of controlled goods in Annex 1 (Item 16) of Export Trade Control Order in Japan.

In case of export from Japan, please confirm if it applies to "objective" criteria or an "informed" (by MITI clause) on the basis of "catch all controls for Non-Proliferation of Weapons of Mass Destruction.