

LM5H40TA

Black & White DMTN LCD Module
(Handheld PC/Measuring Instruments)

Features

- 14 cm [5.5"] HVGA format
- High contrast (30 : 1) B/W display
- Built-in Backlight (LED)
- Transflective display
- Fast response time (100 ms)
- Wide viewing angle (Horizontal: 80° Vertical: 120°)

Specifications

Parameter		Unit
Display size	14 [5.5]	cm ["]
Dot Format (H x V)	480 x 320	dot
Dot Pitch (H x V)	0.24 x 0.24	mm
Active Area (H x V)	115.2 x 76.8	mm
Panel Type	DMTN	-
Panel Mode	Transflective	-
Color	B/W	color
Contrast	30 : 1/15 : 1*1	-
Response Time	100	ms


Parameter		Unit
Brightness	15	cd/m ²
Duty Ratio	1/321 to 1/328	-
Backlight	LED	-
Power Consumption Reflective Mode	50	mW
Transmissive Mode	700	mW
Outline dimensions (W x H x D)	144.0(156)*2x 94.9 x 11.5	mm
Weight	150	g
Operating temperature	0 to +60	°C
Storage temperature	-15 to +75	°C

*1...Contrast ratio : Reflective / Transmissive

*2...() value ... Including mounting tabs.

Outline Dimensions

unit : mm

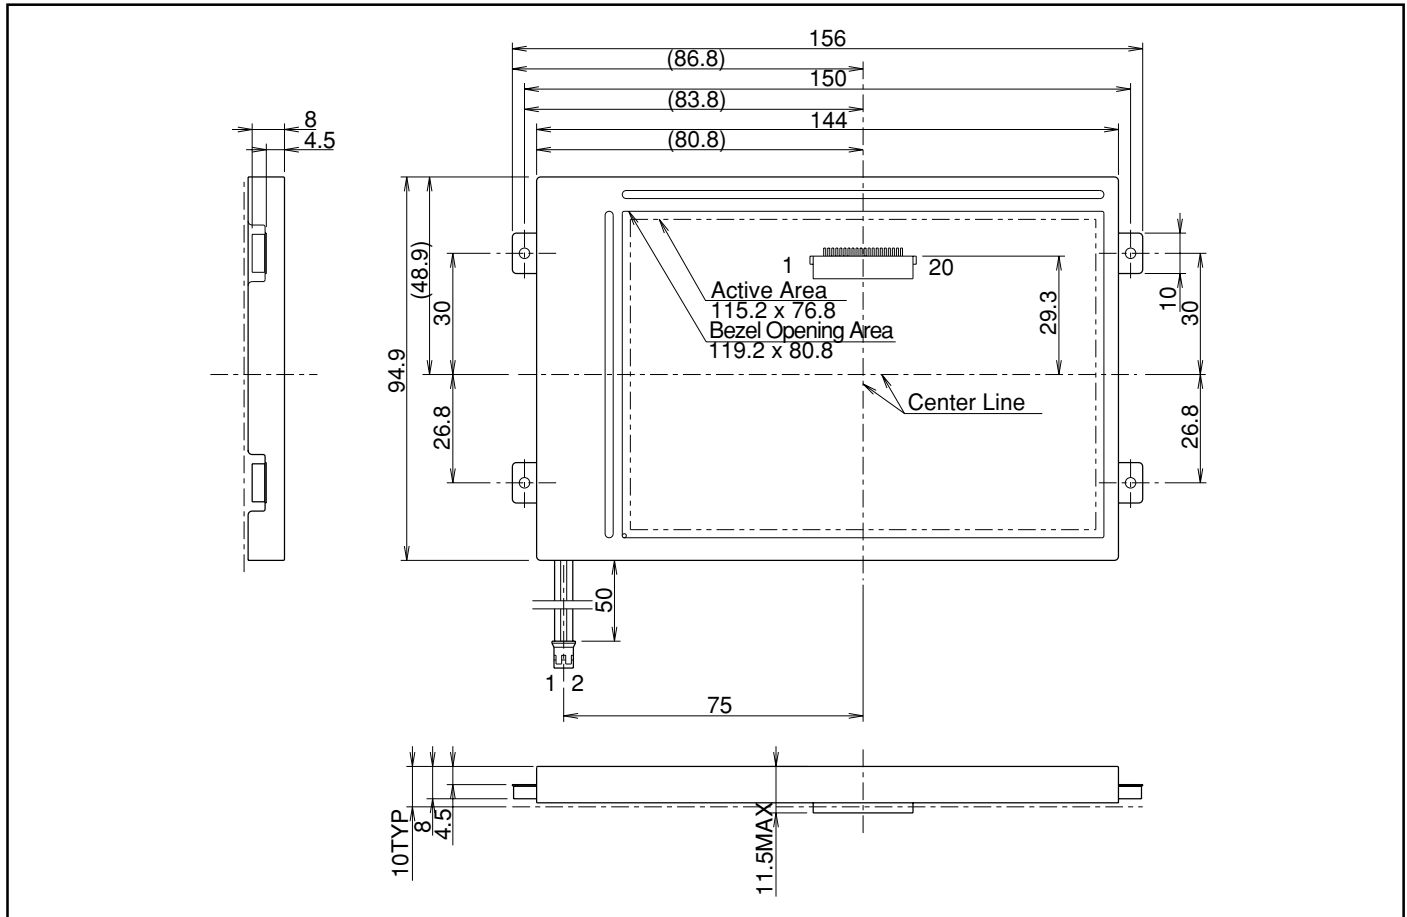

In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in using any SHARP devices shown in catalogs, data books, etc. Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device. Specifications are subject to change without notice for improvement.