



3-Terminal 1A Negative Voltage Regulator

LM7918J


GENERAL DESCRIPTION



The LM7918J series of three-terminal negative regulators are available in TO-252 package and with several fixed output voltages, making them useful in a wide range of applications. Each type employs internal current limiting, thermal shutdown and safe operating area protection, making it essentially indestructible.

ABSOLUTE MAXIMUM RATINGS (Ta = 25 °C)

Parameter	Symbol	Typ	Unit
Input Voltage	V _I	-35	V
Output Voltage	V _O	-18.0	V
Peak Current	I _{PK}	-2.2	A
Operating Temperature Range	T _{OPR}	0~125	°C
Storage Temperature Range	T _{STG}	-65~150	°C

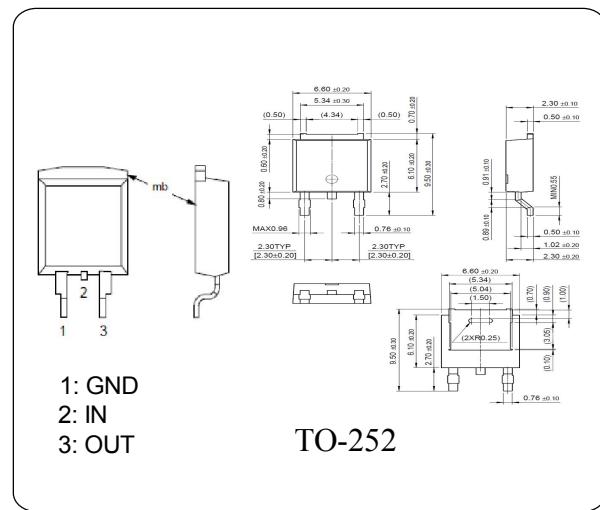

ELECTRICAL CHARACTERISTICS (Ta = 25 °C)

(Refer to test circuit, I_O = 500mA, V_I = -27V, C_i = 2.2μF, C_o = 1.0μF unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Output Voltage	V _O	T _j = 25°C V _I = -21V ~ -33V I _O = 5.0mA ~ 1.0A	-17.46	-18.0	-18.54	V
Line Regulation	△V _O	T _j = 25°C, V _I = -21V ~ -33V	—	—	-360	mV
		T _j = 25°C, V _I = -24V ~ -30V	—	—	-180	
Load Regulation	△V _O	T _j = 25°C, I _O = 5.0mA ~ 1.0A	—	—	-360	mV
		T _j = 25°C, I _O = 250mA ~ 750mA	—	—	-180	
Quiescent Current	I _Q	T _j = +25 °C	—	—	-8.0	mA
Quiescent Current Change	△I _Q	I _O = 5.0mA ~ 1.0A	—	—	-0.5	mA
		T _j = 25°C, V _I = -21V ~ -33V	—	—	-1.0	mA
Output voltage drift	△V _O /△T	I _O = 5.0mA	—	-1.0	—	mV/°C
Ripple Rejection	RR	f = 120Hz, V _O = -22V to -32V	56	80	—	dB
Dropout Voltage	V _{Drop}	I _O = 1.0A, T _j = +25 °C	—	-2	—	V
Output Resistance	R _O	f = 1KHz	—	0.022	—	W
Short Circuit Current	I _{SC}	V _I = -35V, T _A = +25 °C	—	-300	—	mA
Peak Current	I _{PK}	T _j = +25 °C	—	—	-2.2	A