

MA721WS


SILICON EPITAXIAL SCHOTTKY BARRIER DIODE

Applications

- Super-high speed switching circuit
- Small current rectification

PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

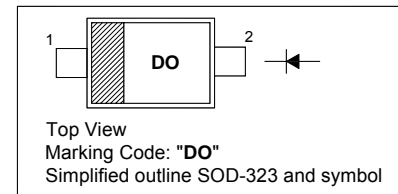


Absolute Maximum Ratings ($T_a = 25\text{ }^\circ\text{C}$)

Parameter	Symbol	Value	Unit
Reverse Voltage	V_R	30	V
Peak Forward Current	I_{FM}	300	mA
Average Forward Current	$I_{F(AV)}$	200	mA
Non-repetitive Peak Forward Surge Current ¹⁾	I_{FSM}	1	A
Junction Temperature	T_J	150	$^\circ\text{C}$
Storage Temperature Range	T_s	- 55 to + 150	$^\circ\text{C}$

¹⁾ The peak-to-peak value in one cycle of 50 Hz sine-wave (non-repetitive)

Characteristics at $T_a = 25\text{ }^\circ\text{C}$

Parameter	Symbol	Typ.	Max.	Unit
Forward Voltage at $I_F = 200\text{ mA}$	V_F	-	0.55	V
Reverse Current at $V_R = 30\text{ V}$	I_R	-	50	μA
Terminal Capacitance at $f = 1\text{ MHz}$	C_T	30	-	pF
Reverse Recovery Time at $I_F = I_R = 100\text{ mA}$, $I_{rr} = 10\text{ mA}$, $R_L = 100\ \Omega$	t_{rr}	3	-	ns









SEMTECH ELECTRONICS LTD.

(Subsidiary of Sino-Tech International Holdings Limited, a company
listed on the Hong Kong Stock Exchange, Stock Code: 724)



ISO/TS 16949 : 2002 Certificate No. 05103
ISO 14001:2004 Certificate No. 7116
ISO 9001:2000 Certificate No. 0506098

Dated : 01/09/2006

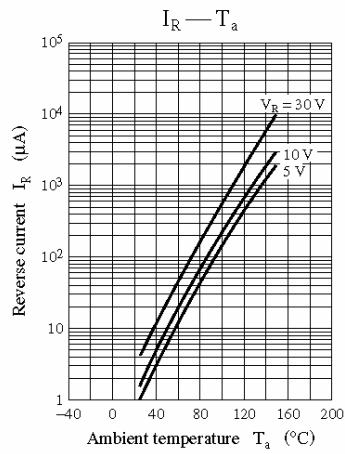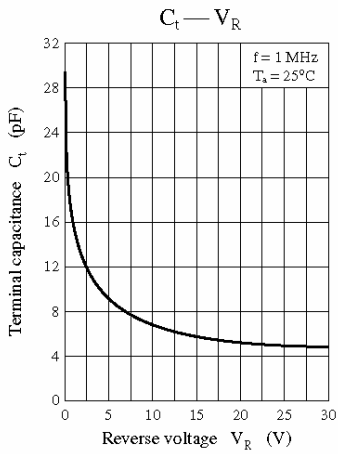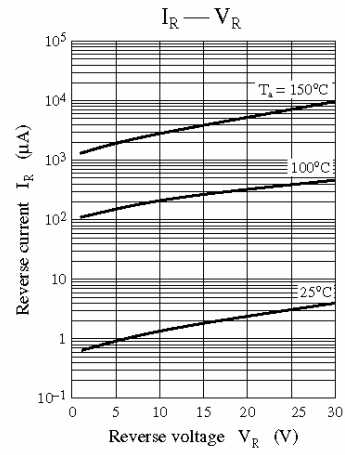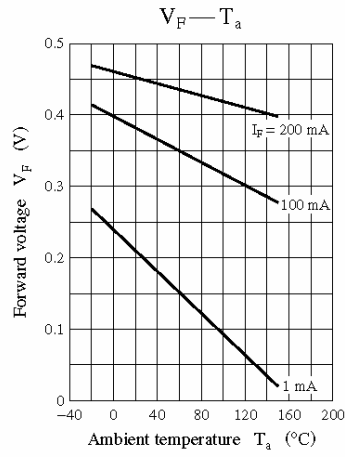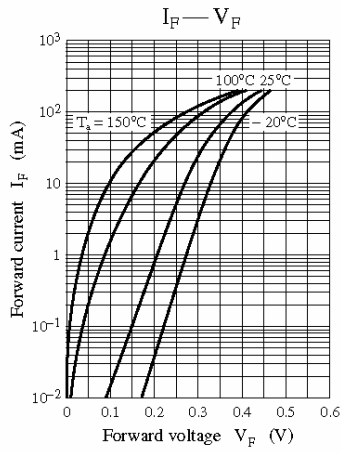

SEMTECH ELECTRONICS LTD.
 (Subsidiary of Sino-Tech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)




ISO/TS 16949 : 2002 Certificate No. 05103
 ISO 14001:2004 Certificate No. 7116
 ISO 9001:2000 Certificate No. 0506098

MA721WS


PACKAGE OUTLINE

Plastic surface mounted package; 2 leads

SOD-323

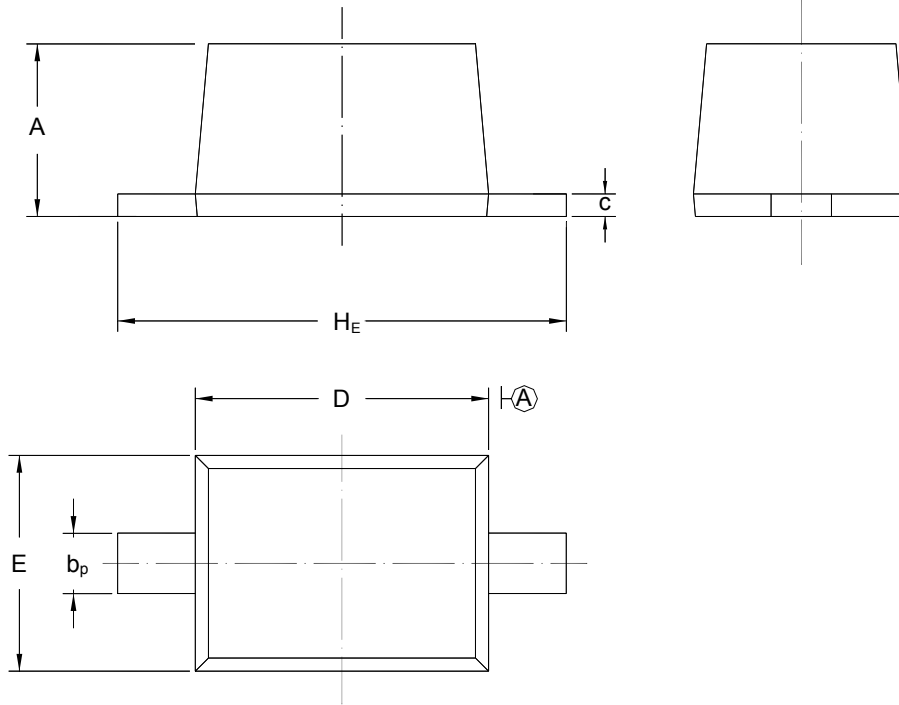

UNIT	A	b _p	C	D	E	H _E
mm	1.10 0.80	0.40 0.25	0.15 0.00	1.80 1.60	1.35 1.15	2.80 2.30



SEMTECH ELECTRONICS LTD.
 (Subsidiary of Sino-Tech International Holdings Limited, a company
 listed on the Hong Kong Stock Exchange, Stock Code: 724)



Dated : 01/09/2006