

MB22S THRU MB210S




SURFACE MOUNT SCHOTTKY BRIDGE RECTIFIER
 Reverse Voltage - 20 to 100 Volts Forward Current - 2.0 Ampere

FEATURES

- Surge overload rating - 50 Amperes peak
- Ideal for printed circuit board
- Reliable low cost construction utilizing molded
- Glass passivated device
- Polarity symbols molded on body

MECHANICAL DATA

- Case : MBS, Molded Plastic
- Epoxy : Device has UL flammability classification 94V-0
- Mounting Position : Any
- Weight : 0.22 grams (approx.)
- Marking : Type Number

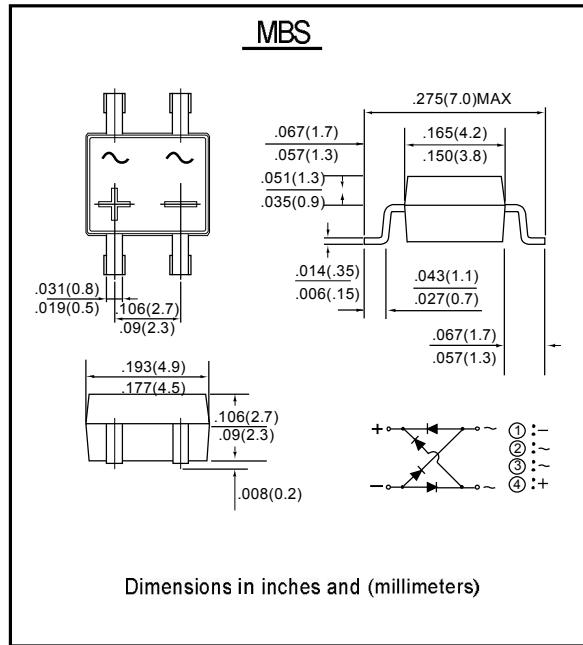

Maximum Ratings @ $T_A=25^\circ\text{C}$ unless otherwise specified

Parameter	Symbol	MB22S	MB24S	MB26S	MB28S	MB210S	Unit
Maximum repetitive peak reverse voltage	V_{RRM}	20	40	60	80	100	V
Maximum RMS voltage	V_{RMS}	14	28	42	56	70	V
Maximum DC blocking voltage	V_{DC}	20	40	60	80	100	V
Maximum Average forward output current	$I_{F(AV)}$			2.0			A
Non-Repetitive Peak Forward Surge Current 8.3ms Single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}			50			A
Maximum instantaneous forward voltage at 2.0A	VF	0.50	0.70	0.85			V
Maximum DC reverse current at TA=25°C rated DC blocking voltage per leg	IR		0.5	20			mA
Typical thermal resistance per leg(Note1)	$R_{\theta JA}$ $R_{\theta JL}$		88 28				°C/W
Operation junction temperature range	T_j		-55 to +150				°C
Storage temperature range	T_{STG}		-55 to +150				°C

Notes: 1. Thermal resistance from junction to ambient and from junction to lead P.C.B. mounted on 0.2×0.2"(5.0×5.0mm) copper pad areas.

MB22S THRU MB210S

RATINGS AND CHARACTERISTIC CURVES

Fig. 1 - Forward Current Derating Curve

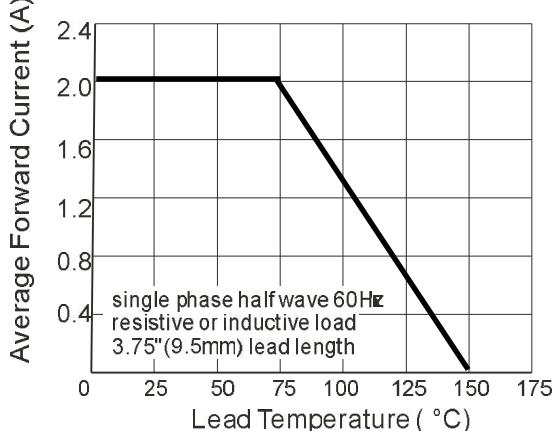


Fig. 2 - Maximum Non-Repetitive Peak Forward Surge Current

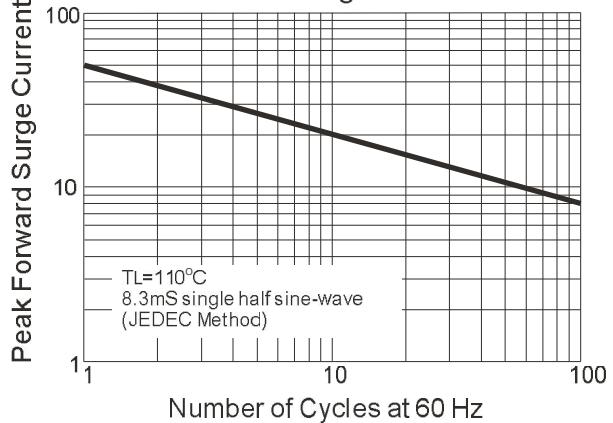


Fig. 3 - Typical Instantaneous Forward Characteristics

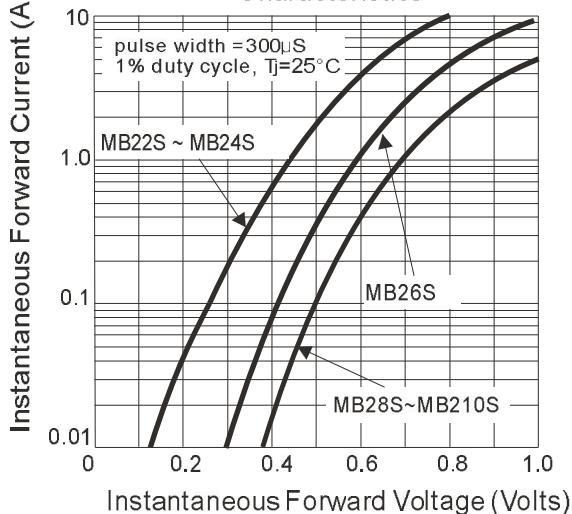


Fig. 4A - Typical Reverse Characteristics

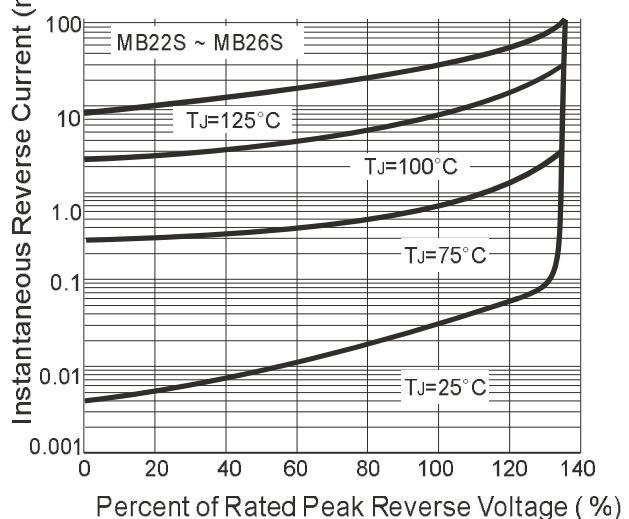


Fig. 5 - Typical Junction Capacitance

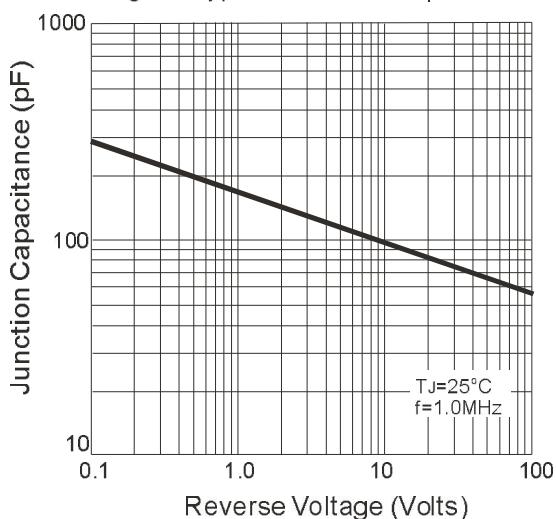


Fig. 4B - Typical Reverse Characteristics

