

DESCRIPTION

The MBB55TA is a efficient GaN blue LED with a 430nm peak wavelength, It is encapsulated in a 5mm diameter cylindric with clear transparent lens.

FEATURES

High Performance - 700 μ W
Superior SiC substrate technology
430nm peak wavelength
Excellent chip to chip consistency
High Reliability


APPLICATIONS

Outdoor Full Color Displays & Moving Message Signs
Solid State Incandescent Replacement Bulbs
High Ambient Panel Indicators
Color Printers and Scanners
Medical & Analytical Instruments

ABSOLUTE MAXIMUM RATINGS

Power Dissipation @ Ta=25°C	125mW
Forward Current, DC (IF)	25mA
Reverse Voltage	5V
Operating Temperature	-20 to +80°C
Storage Temperature	-30 to +100°C
Lead Temperature	260°C

(Soldering 5 sec., 1/16" form body)

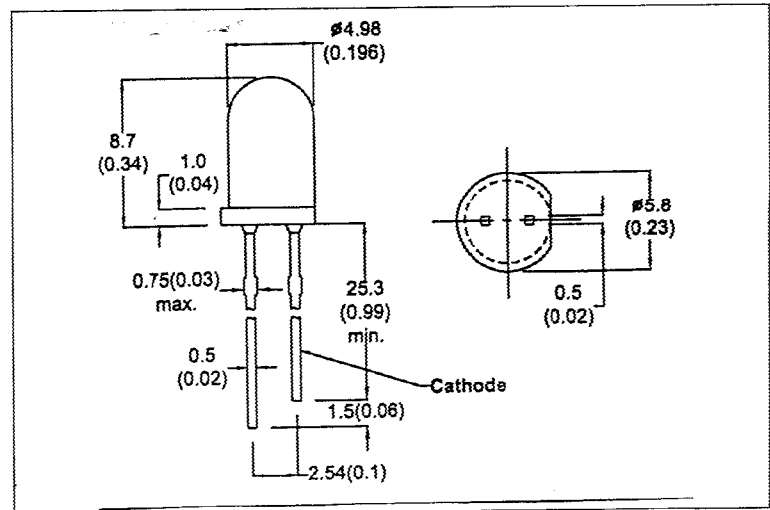

- All dimension in mm(inch)
- No Scale
- Tol. : +/-0.3mm

ELECTRO-OPTICAL CHARACTERISTICS

(Ta=25°C)

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT	CONDITIONS
Forward Voltage	VF		3.8	5.0	V	IF=20mA
Reverse Current	IR			100	μ A	VR=5V
Luminous Intensity	IV	2.0	3.2		mcd	IF=20mA
Peak Wavelength	λ_p		430		nm	IF=20mA
Spectral Line Half Width	$\Delta\lambda$		65		nm	IF=20mA
Viewing Angle	2 θ 1/2		170		degree	IF=20mA

CAUTION

Static electricity does damage these product. Don't apply it to their leadframes. → 9



MICRO ELECTRONICS LTD.

38, Hung To Road, Microtron Building, Kwun Tong, Kowloon, Hong Kong.

Kwun Tong P.O. Box 69477 Hong Kong. Fax No. 2341 0321 Telex:43510 Micro Hx. Tel: 2343 0181-5

4/A