

Micro Commercial Components

Micro Commercial Components 20736 Marilla Street Chatsworth CA 91311

Phone: (818) 701-4933 Fax: (818) 701-4939

MBR15U100

15 Amp Rectifier

Schottky Barrier 100 Volts

TO-277 E1 OPIN 2 PIN 3 O ★ HEAT SINK

DIMENSIONS					
	INCH	INCHES		MM	
DIM	MIN	MAX	MIN	MAX	NOTE
Α	.041	.045	1.05	1.15	
A2	.010	.014	0.25	0.35	
b1	.031	.039	0.80	1.00	
b2	.067	.075	1.70	1.90	
D	.154	.161	3.90	4.10	
Е	.252	.260	6.40	6.60	
E1	.205	.215	5.20	5.40	
е	.071	.075	1.80	1.90	

Features

- Halogen free available upon request by adding suffix "-HF"
- High surge Forward current capability
- Low Power loss, High efficiency
- Lead Free Finish/RoHS Compliant(Note 1) ("P" Suffix designates RoHS Compliant. See ordering information)
- Epoxy meets UL 94 V-0 flammability rating
- Moisture Sensitivity Level 1

Maximum Ratings

- Operating Temperature:-55°C to +150°C
- Storage Temperature:-55°C to +150°C

MCC Part Number	Device Marking	Maximum Recurrent Peak Reverse Voltage	Maximum RMS Voltage	Maximum DC Blocking Voltage
MBR15U100	15U100	100V	70V	100V


Electrical Characteristics @ 25°C Unless Otherwise Specified


Average Forward Current	I _{F(AV)}	15A		$T_C = 110^{\circ} C$		
Peak Forward Surge Current	I _{FSM}		275A		8.3ms, h	nalf sine
		Min.	Тур.	Max.		
Forward Voltage	V_{F}		0.80V 0.75V	0.85V 0.80V	I=15A I=15A	
Reverse Current	I _R			0.1mA 10mA	V _R =100 V _R =100	TJ=25°C TJ=125°C
Reverse Breakdown Voltage	V_{BR}	100V IR=0.5mA		Α		
Current Squared Time	l ² t	313 A ² s		1ms≤t<8.3ms Tj=25℃		
Typical Thermal Resistance	$R_{\theta JC}$	8.0 °C/W				

Notes: 1. High Temperature Solder Exemption Applied, see EU Directive Annex 7.



Characteristics(Typical)

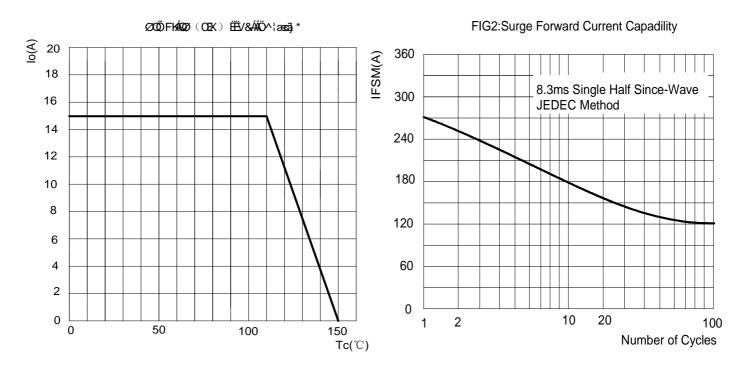

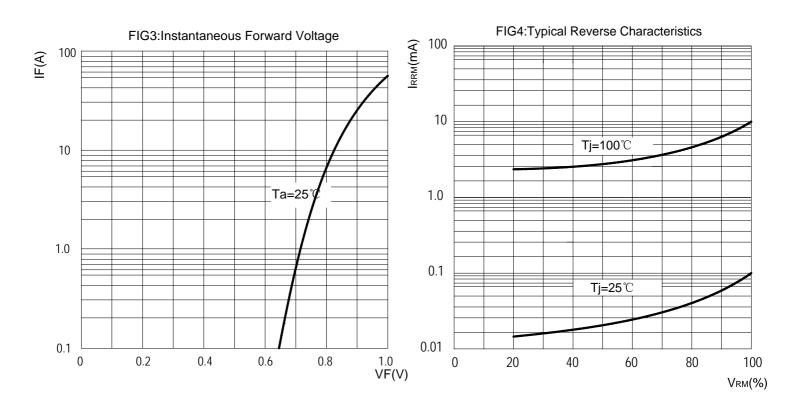



Ordering Information

Device	Packing
Part Number-TP	Tape&Reel: 4Kpcs/Reel

Note: Adding "-HF" suffix for halogen free, eg. Part Number-TP-HF

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes.
Micro Commercial Components Corp. does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Micro Commercial Components Corp. and all the companies whose products are represented on our website, harmless against all damages.

APPLICATIONS DISCLAIMER

Products offer by *Micro Commercial Components Corp* . are not intended for use in Medical,

Aerospace or Military Applications.