



MBR2035FCT-MBR20200FCT

20.0 AMPS. Schottky Barrier Rectifiers


Features

- ✧ Plastic material used carries Underwriters Laboratory Classifications 94V-0
- ✧ Metal silicon junction, majority carrier conduction
- ✧ Low power loss, high efficiency
- ✧ High current capability, low forward voltage drop
- ✧ High surge capability
- ✧ For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications
- ✧ Guardring for overvoltage protection
- ✧ High temperature soldering guaranteed: 260°C/10 seconds, 0.25" (6.35mm) from case
- ✧ Green compound with suffix "G" on packing code & prefix "G" on datecode.

Mechanical Data

- ✧ Cases: JEDEC TO-220AB molded plastic
- ✧ Terminals: Pure tin plated, lead free. solderable per MIL-STD-750, Method 2026
- ✧ Polarity: As marked
- ✧ Mounting position: Any
- ✧ Mounting torque: 5 in. - lbs. max
- ✧ Weight: 1.71 grams

TO-220F

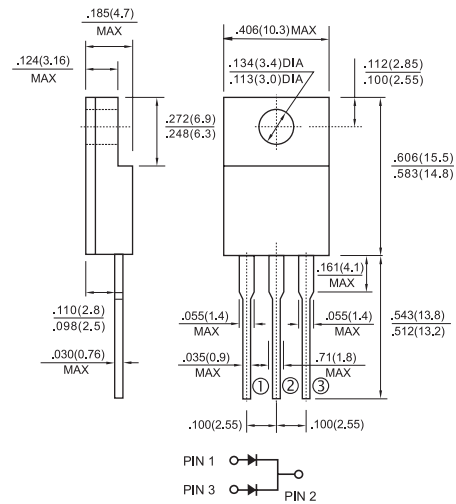

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Type Number	Symbol	MBR 2035 FCT	MBR 2045 FCT	MBR 2050 FCT	MBR 2060 FCT	MBR 2090 FCT	MBR 20100 FCT	MBR 20150 FCT	MBR 20200 FCT	Units
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	35	45	50	60	90	100	150	200	V
Maximum RMS Voltage	V_{RMS}	24	31	35	42	63	70	105	140	V
Maximum DC Blocking Voltage	V_{DC}	35	45	50	60	90	100	150	200	V
Maximum Average Forward Rectified Current at $T_C=135^\circ\text{C}$	$I_{F(AV)}$	20								A
Peak Repetitive Forward Current (Rated V_R , Square Wave, 20KHz) at $T_C=135^\circ\text{C}$	I_{FRM}	20								A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	150								A
Peak Repetitive Reverse Surge Current (Note 2)	I_{RRM}	1.0		0.5					A	
Maximum Instantaneous Forward Voltage at $I_F=10\text{A}, T_A=25^\circ\text{C}$ $I_F=10\text{A}, T_A=125^\circ\text{C}$ $I_F=20\text{A}, T_A=25^\circ\text{C}$ $I_F=20\text{A}, T_A=125^\circ\text{C}$	V_F	—	0.80	0.85	0.99					V
Maximum Instantaneous Reverse Current at Rated DC Blocking Voltage (Note 1) @ $T_A=25^\circ\text{C}$ @ $T_A=125^\circ\text{C}$	I_R	15	10	5.0	0.15					mA mA
Voltage Rate of Change, (Rated V_R)	dV/dt	10,000								V/ μs
Typical Junction Capacitance	C_j	400				320				pF
Typical Thermal Resistance Per Leg (Note 3)	$R_{\theta JC}$	1.0				2.0				$^\circ\text{C}/\text{W}$
Operating Junction Temperature Range	T_J	-65 to +150								$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-65 to +175								$^\circ\text{C}$

- Notes: 1. Pulse Test: 300us Pulse Width, 1% Duty Cycle
2. 2.0us Pulse Width, f=1.0 KHz
3. Mount on Heatsink Size of (4"x6"x0.25") Al-Plate.

RATINGS AND CHARACTERISTIC CURVES (MBR2035FCT THRU MBR20200FCT)

FIG.1- FORWARD CURRENT DERATING CURVE

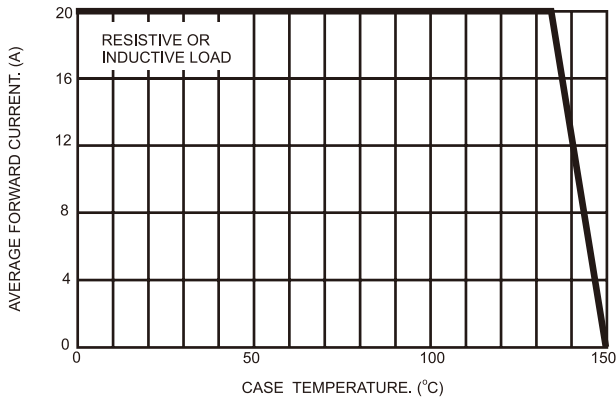


FIG.2- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT PER LEG

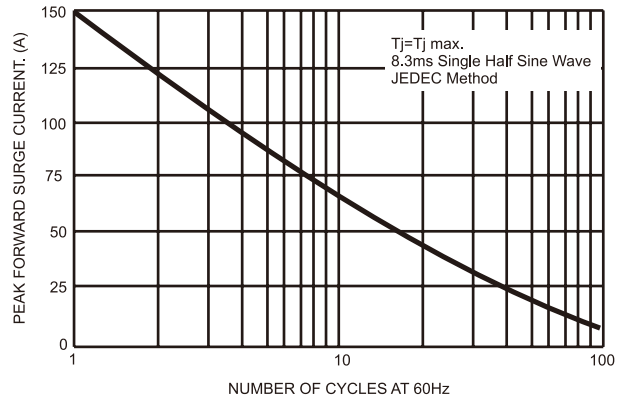


FIG.3- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS PER LEG

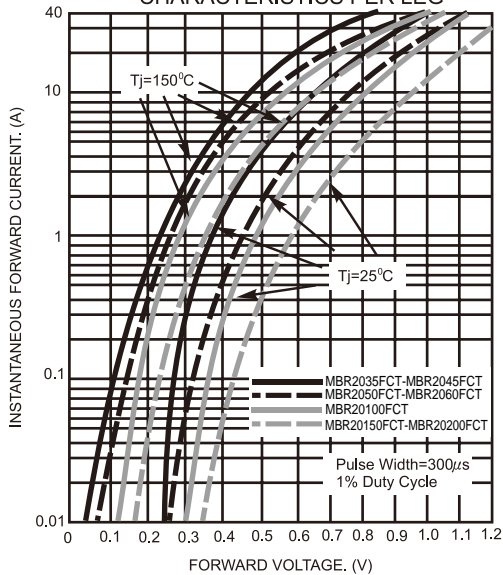


FIG.4- TYPICAL REVERSE CHARACTERISTICS PER LEG

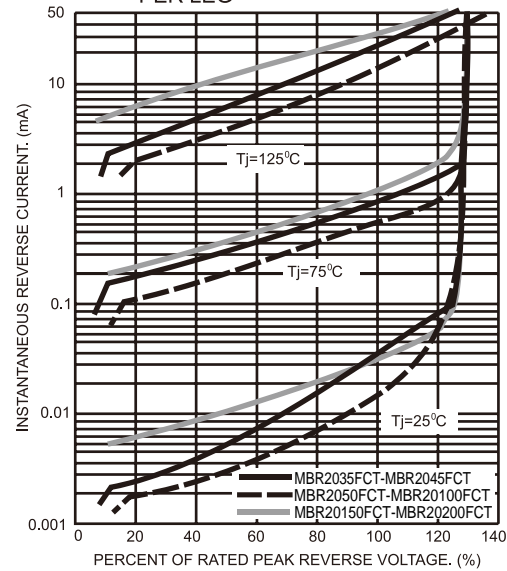


FIG.5- TYPICAL JUNCTION CAPACITANCE PER LEG

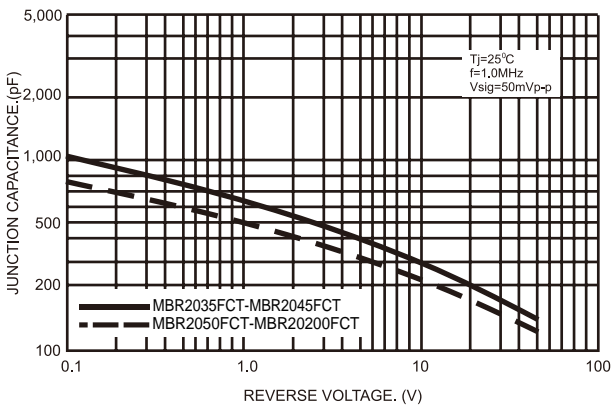


FIG.6- TYPICAL TRANSIENT THERMAL IMPEDANCE PER LEG

