

MBRF1535CT - MBRF15150CT

15.0 AMPS. Isolated Schottky Barrier Rectifiers

ITO-220AB




Features

- ✧ UL Recognized File # E-326243
- ✧ Plastic material used carriers Underwriters Laboratory Classification 94V-0
- ✧ Metal silicon junction, majority carrier conduction
- ✧ Low power loss, high efficiency
- ✧ High current capability, low forward voltage drop
- ✧ High surge capability
- ✧ For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications
- ✧ Guard-ring for overvoltage protection
- ✧ High temperature soldering guaranteed: 260°C/10 seconds, at terminals
- ✧ Green compound with suffix "G" on packing code & prefix "G" on datecode

Mechanical Data

- ✧ Case: ITO-220AB molded plastic body
- ✧ Terminals: Pure tin plated, lead free, solderable per MIL-STD-750, Method 2026
- ✧ Polarity: As marked
- ✧ Mounting position: Any
- ✧ Mounting torque: 5 in. - lbs, max
- ✧ Weight: 1.75 grams

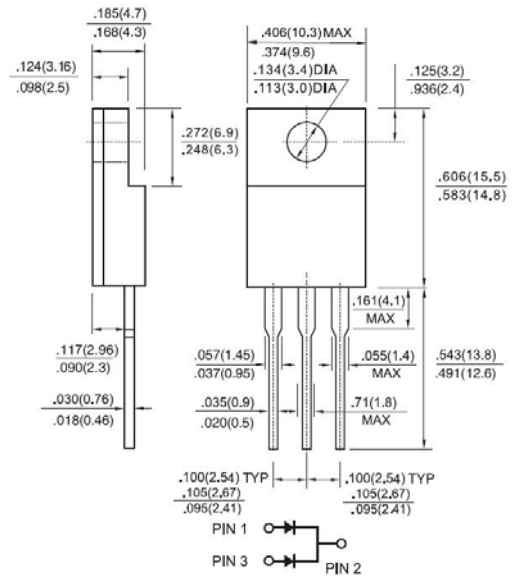

Dimensions in inches and (millimeters)

Marking Diagram



- MBRF15XXCT = Specific Device Code
 G = Green Compound
 Y = Year
 WW = Work Week

Maximum Ratings and Electrical Characteristics

Rating at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Type Number	Symbol	MBRF 1535 CT	MBRF 1545 CT	MBRF 1550 CT	MBRF 1560 CT	MBRF 1590 CT	MBRF 15100 CT	MBRF 15150 CT	Unit
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	35	45	50	60	90	100	150	V
Maximum RMS Voltage	V_{RMS}	24	31	35	42	63	70	105	V
Maximum DC Blocking Voltage	V_{DC}	35	45	50	60	90	100	150	V
Maximum Average Forward Rectified Current at $T_c=105^\circ\text{C}$	$I_{F(AV)}$	15							A
Peak Repetitive Forward Current (Rated VR, Square Wave, 20KHz) at $T_c=105^\circ\text{C}$	I_{FRM}	15							A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	150							A
Peak Repetitive Reverse Surge Current (Note 1)	I_{RRM}	1	0.5					A	
Maximum Instantaneous Forward Voltage (Note 2) $I_F=7.5\text{A}, T_A=25^\circ\text{C}$ $I_F=7.5\text{A}, T_A=125^\circ\text{C}$ $I_F=15\text{A}, T_A=25^\circ\text{C}$ $I_F=15\text{A}, T_A=125^\circ\text{C}$	V_F	-	0.75	0.92	0.95	V			
Maximum Reverse Current @ Rated VR $T_A=25^\circ\text{C}$ $T_A=125^\circ\text{C}$	I_R	0.5	0.3	0.1	mA				
		10	7.5	5					
Voltage Rate of Change (Rated V_R)	dV/dt	10000							V/us
Typical Thermal Resistance Per Leg	$R_{\theta JC}$	3.5							$^\circ\text{C/W}$
Operating Temperature Range	T_J	- 65 to + 150							$^\circ\text{C}$
Storage Temperature Range	T_{STG}	- 65 to + 150							$^\circ\text{C}$

Note 1: 2.0uS Pulse Width, f=1.0KHz

Note 2: Pulse Test : 300uS Pulse Width, 1% Duty Cycle

RATINGS AND CHARACTERISTIC CURVES (MBRF1535CT THRU MBRF15150CT)

FIG. 1 FORWARD CURRENT DERATING CURVE

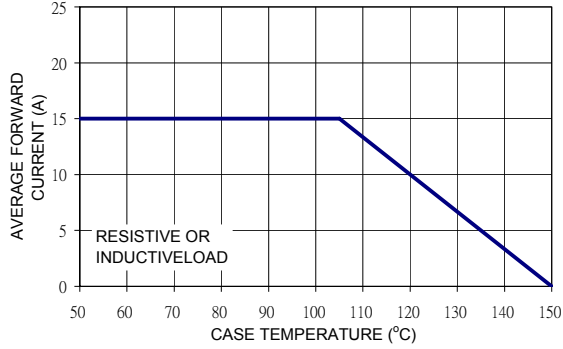


FIG. 2 MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT PER LEG

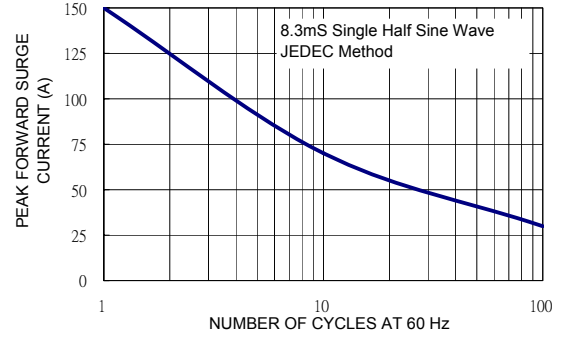


FIG. 3 TYPICAL FORWARD CHARACTERISTICS PER LEG

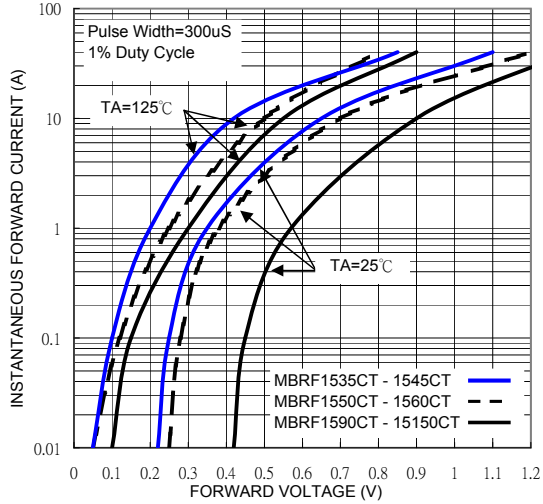


FIG. 4 TYPICAL REVERSE CHARACTERISTICS PER LEG

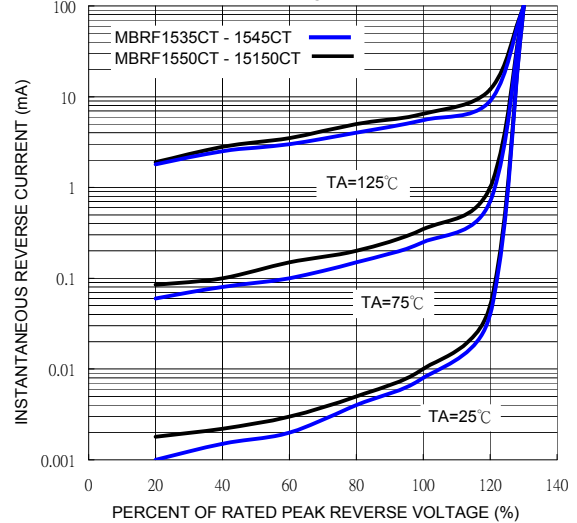


FIG. 5 TYPICAL JUNCTION CAPACITANCE PER LEG

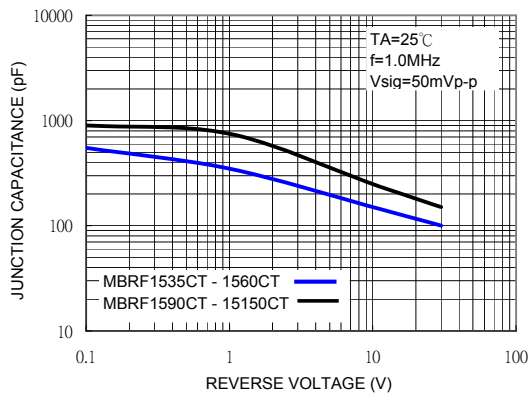


FIG. 6 TYPICAL TRANSIENT THERMAL IMPEDANCE PER LEG

