

MF1050V-2

FOR DIGITAL MOBILE TELEPHONE, Rx

MF1050V-2

DESCRIPTION

This SAW filter for the receiving RF circuit of digital mobile communication equipment operating at 1477 MHz ~ 1501 MHz.

FEATURES

1. SMD package insures small size, lightweight.
2. Adjustment free.
3. Low insertion loss and high stop band attenuation.
4. Wide and sharp passband characteristics.
5. High stability and reliability.
6. Designed for reflow solderings.

APPLICATION

- Digital mobile cellular telephone
- Portable digital cellular telephone
- Wireless equipment


MAXIMUM RATINGS

Rating	Value	Unit
Input Power	40	mW
Operating Temperature Range	-20 to 75	°C
Storage Temperature Range	-30 to 85	°C

ELECTRICAL PERFORMANCE

Parameter	MF1050V-2		Units		
	Min	Typ		Max	
PASSBAND FREQUENCY	1477 – 1501		MHz		
PASSBAND CHARACTERISTICS	Insertion Loss	2.5	3.4	dB	
	Ripple	0.6	1.5		dBp-p
	VSWR	1.7	2.5		
STOPBAND ATTENUATION	0 – 1050 MHz	40	48	dB	
	1050 – 1380 MHz	25	28		
	1429 – 1453 MHz	7	13		
	1542 – 1566 MHz	25	30		
	1607 – 1631 MHz	40	45		
	1737 – 1761 MHz	37	46		
1761 – 3000 MHz	25	32	dB		

PACKAGE OUTLINE DIMENSIONS

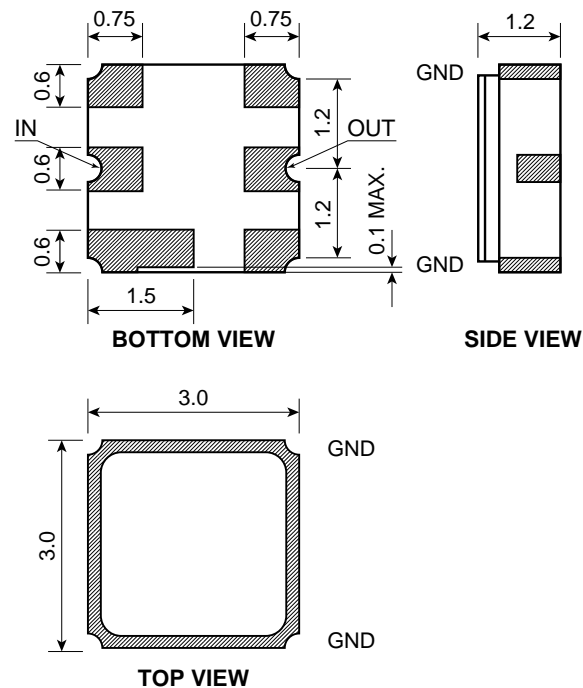

DIMENSIONS ARE IN MILLIMETERS
±0.2 UNLESS OTHERWISE SPECIFIED

MF1050V-2 TYPICAL CHARACTERISTICS

