
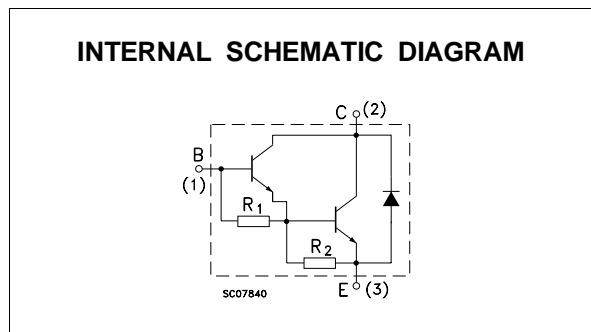


## SILICON NPN POWER DARLINGTON TRANSISTORS

■ SGS-THOMSON PREFERRED SALESTYPES

**DESCRIPTION**

The MJE802 and MJE803 are silicon epitaxial-base NPN transistors in monolithic Darlington configuration and are mounted in Jedec SOT-32 plastic package. They are intended for use in medium power linear and switching applications.

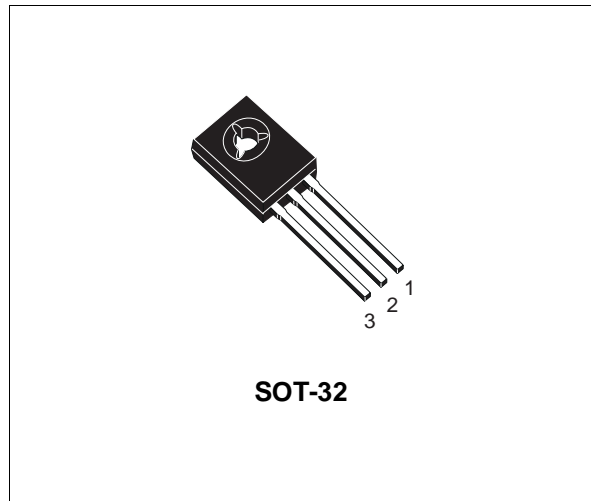

**ABSOLUTE MAXIMUM RATINGS**

Symbol	Parameter	Value	Unit
$V_{CBO}$	Collector-Base Voltage ( $I_E = 0$ )	80	V
$V_{CEO}$	Collector-Emitter Voltage ( $I_B = 0$ )	80	V
$V_{EBO}$	Base-Emitter Voltage ( $I_C = 0$ )	5	V
$I_C$	Collector Current	4	A
$I_B$	Base Current	0.1	A
$P_{tot}$	Total Power Dissipation at $T_{case} \leq 25\text{ }^\circ\text{C}$	40	W
$T_{stg}$	Storage Temperature	-65 to 150	$^\circ\text{C}$
$T_j$	Max Operating Junction Temperature	150	$^\circ\text{C}$

For PNP types voltage and current values are negative.

## MJE802-MJ803

### THERMAL DATA

$R_{thj-amb}$	Thermal Resistance Junction-ambient	Max	3.13	$^{\circ}\text{C}/\text{W}$
---------------	-------------------------------------	-----	------	-----------------------------


### ELECTRICAL CHARACTERISTICS ( $T_{case} = 25^{\circ}\text{C}$ unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
$I_{CBO}$	Collector Cut-off Current ( $I_E = 0$ )	$V_{CB} = \text{rated } V_{CBO}$			100	$\mu\text{A}$
		$V_{CB} = \text{rated } V_{CBO}$ $T_{case} = 100^{\circ}\text{C}$			500	$\mu\text{A}$
$I_{CEO}$	Collector Cut-off Current ( $I_B = 0$ )	$V_{CE} = \text{rated } V_{CEO}$			100	$\mu\text{A}$
$I_{EBO}$	Emitter Cut-off Current ( $I_C = 0$ )	$V_{EB} = 5 \text{ V}$			2	$\text{mA}$
$V_{CEO(sus)}^*$	Collector-Emitter Sustaining Voltage ( $I_B = 0$ )	$I_C = 50 \text{ mA}$	80			$\text{V}$
$V_{CE(sat)}^*$	Collector-Emitter Sustaining Voltage	$I_C = 4 \text{ A}$			3	$\text{V}$
		$I_C = 1.5 \text{ A}$			2.5	$\text{V}$
$V_{BE}^*$	Base-Emitter Voltage	$I_C = 4 \text{ A}$			3	$\text{V}$
		$I_C = 1.5 \text{ A}$			2.5	$\text{V}$
$h_{FE}^*$	DC Current Gain	$I_C = 4 \text{ A}$			100	
		$I_C = 1.5 \text{ A}$			750	
$h_{fe}$	Small Signal Current Gain	$I_C = 1.5 \text{ A}$ $f = 1 \text{ MHz}$			1	

\* Pulsed: Pulse duration = 300 $\mu\text{s}$ , duty cycle  $\leq 1.5\%$

**SOT-32 MECHANICAL DATA**

DIM.	mm			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A	7.4		7.8	0.291		0.307
B	10.5		10.8	0.413		0.445
b	0.7		0.9	0.028		0.035
b1	0.49		0.75	0.019		0.030
C	2.4		2.7	0.04		0.106
c1		1.2			0.047	
D		15.7			0.618	
e		2.2			0.087	
e3		4.4			0.173	
F		3.8			0.150	
G	3		3.2	0.118		0.126
H			2.54			0.100

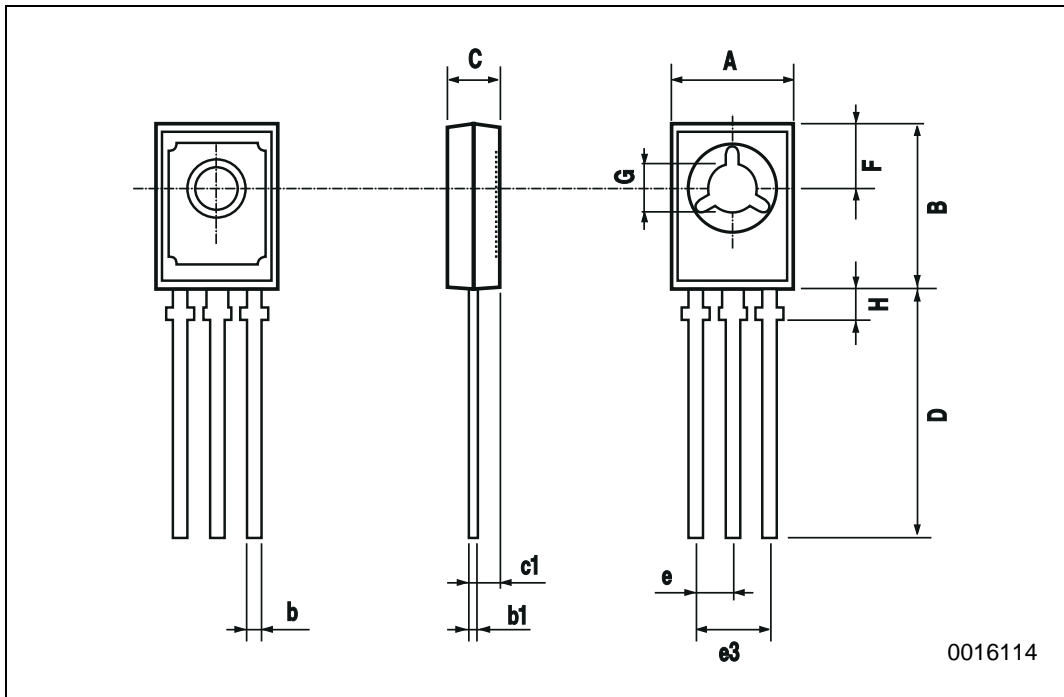

Information furnished is believed to be accurate and reliable. However, SGS-THOMSON Microelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of SGS-THOMSON Microelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. SGS-THOMSON Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of SGS-THOMSON Microelectronics.

© 1996 SGS-THOMSON Microelectronics - Printed in Italy - All Rights Reserved

SGS-THOMSON Microelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - France - Germany - Hong Kong - Italy - Japan - Korea - Malaysia - Malta - Morocco - The Netherlands - Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A