










-  Magnetic Integrated Connector Modules
-  Compliant with IEEE802.3 standard including 350 H OCL with 8mA DC Bias
-  1500Vrms isolation voltage per IEEE802.3
-  Enhanced performance on EMI suppression with metal shield
-  Support various 10/100 transceiver ICs
-  Operating temperature 0°C to +70°C
-  UL 1863 listed
-  RoHS compliant



GENERAL ELECTRICAL SPECIFICATION @ 25°C

Insertion Loss (dB Max)	Return Loss (dB Min)					CMRR (dB Min)			Crosstalk (dB Min)	Hipot (Vrms)
	1-30MHz	40MHz	50MHz	60-80MHz	32MHz	62MHz	100MHz			
0.1-100MHz	1.0	16.0	14.0	13.0	12.0	42.0	37.0	33.0	0.1-100MHz	1500

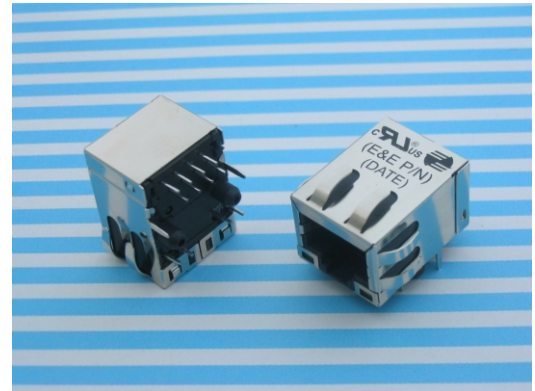PART NUMBER TABLE

Part Number <sup>2</sup>	Turn Ratio (Chip : Cable) (± 3%)		Configuration <sup>3</sup>		LED <sup>4</sup> (Left / Right)	Mechanical Package	Schematic
	Tx	Rx	Tx	Rx			
MJR11D2GYA0-H301	1CT:1	1CT:1CT	TCA	CT	G / Y	MJ11D-01A	H301
MJR11D2GYA0-H34Y	1CT:1	1CT:1CT	TCA	CT	G / Y	MJ11D-01A	H34Y
MJR11D2GYA1-H301	1CT:1	1CT:1CT	TCA	CT	G / Y	MJ11D-01B	H301
MJR11D2GYA1-H34Y	1CT:1	1CT:1CT	TCA	CT	G / Y	MJ11D-01B	H34Y
MJR11D2NNA0-H301	1CT:1	1CT:1CT	TCA	CT	—	MJ11D-01C	H301
MJR11D2NNA0-H34Y	1CT:1	1CT:1CT	TCA	CT	—	MJ11D-01C	H34Y

Notes:


- Ordering Information: MJR11D2GYA0-abbbc/MJR11D2GYA1-abbbc/MJR11D2NNA0-abbbc.  
 MJR11D2GYA0 = Product Type (xxRxxxxxxx, R represents Internal Control Code).  
 MJR11D2GYA1 = Product Type (xxRxxxxxxx, R represents Internal Control Code).  
 MJR11D2NNA0 = Product Type (xxRxxxxxxx, R represents Internal Control Code).  
 abbb = Schematic code(H301/H34Y).  
 c = Packaging Code (No Code = NoN Tape and reel packaging, e.g. Tray Packaging).
- For different electrical and mechanical specifications, please contact E&E Magnetic Products Limited.
- Core location are counted from PCB (Chip) side to Cable (Media) side, where:  
 "T" = Isolation transformer ; "C" = Common-mode choke ; "A" = Auto-transformer
- LEDs (Left / Right) : "G" = Green ; "Y" = Yellow ; " — " = None. For different LED color requirements, please contact E&E Magnetic Products Limited.
- Panel tabs are optional.
- All parts shown in this datasheet have gold plating thickness of 10 micro-inch (min.) over contact area. Advance options including 30 micro-inch (min.) and 50 micro-inch (min.) are also available.

MATERIALS


Housing	Consist of thermoset & thermoplastic materials, all of them are UL 94-V0 rated.
Contact Pins <sup>6</sup>	Phosphor bronze, plated with nickel under-plating and hard gold over contact area.
PCB Pins	Copper wire which meets solderability requirements per MIL-STD-202, method 208.

**MECHANICAL DIMENSIONS**

MJ11D-01A

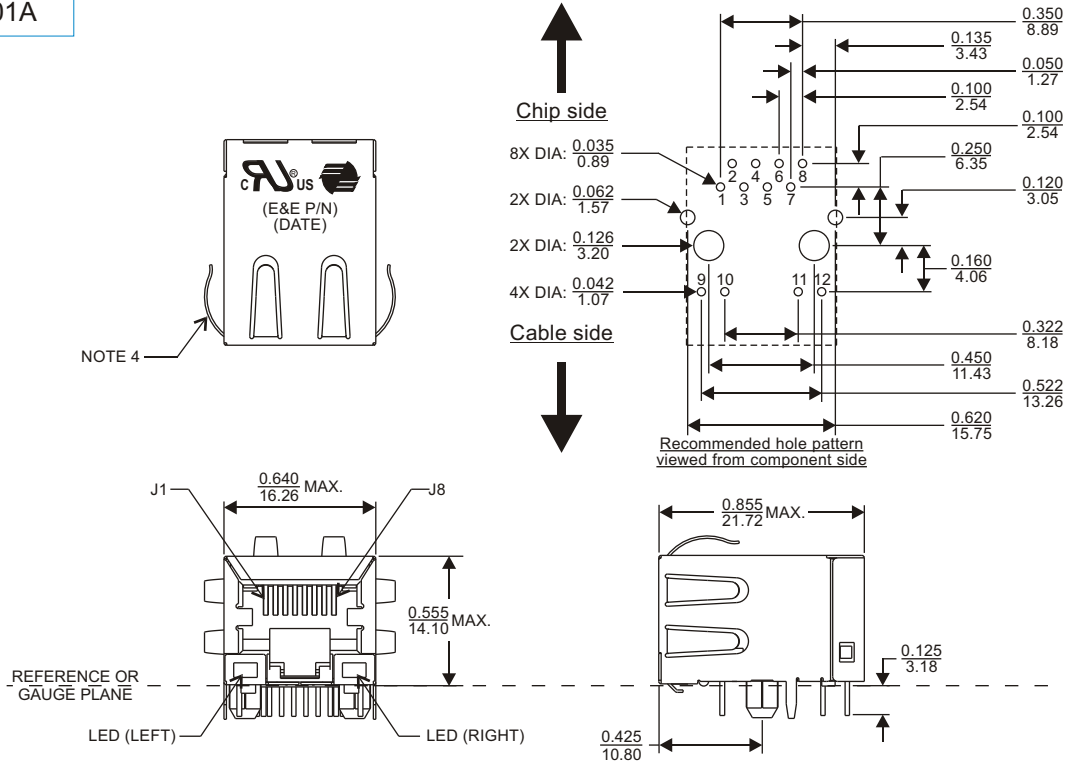

MJ11D-01B

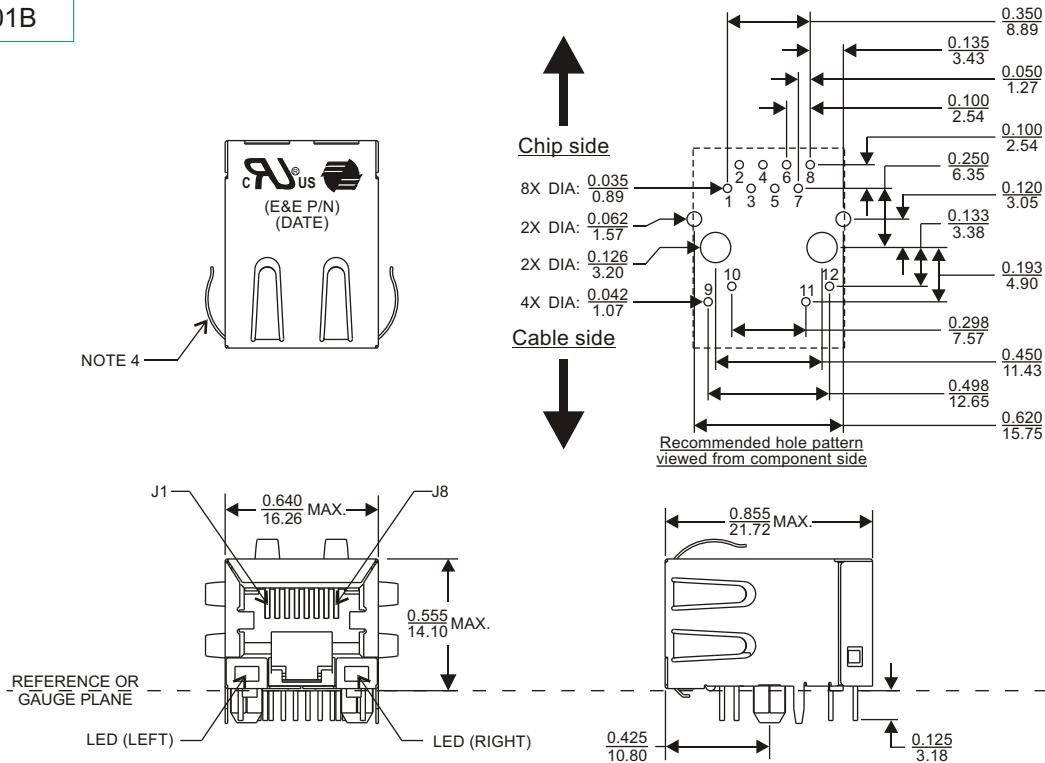


All dimensions are specified in  $\frac{\text{inch}}{\text{mm}}$  with higher precedence in inch.

Unless otherwise specified, all tolerances are  $\pm \frac{0.010}{0.25}$ .

MECHANICAL DIMENSIONS

MJ11D-01C

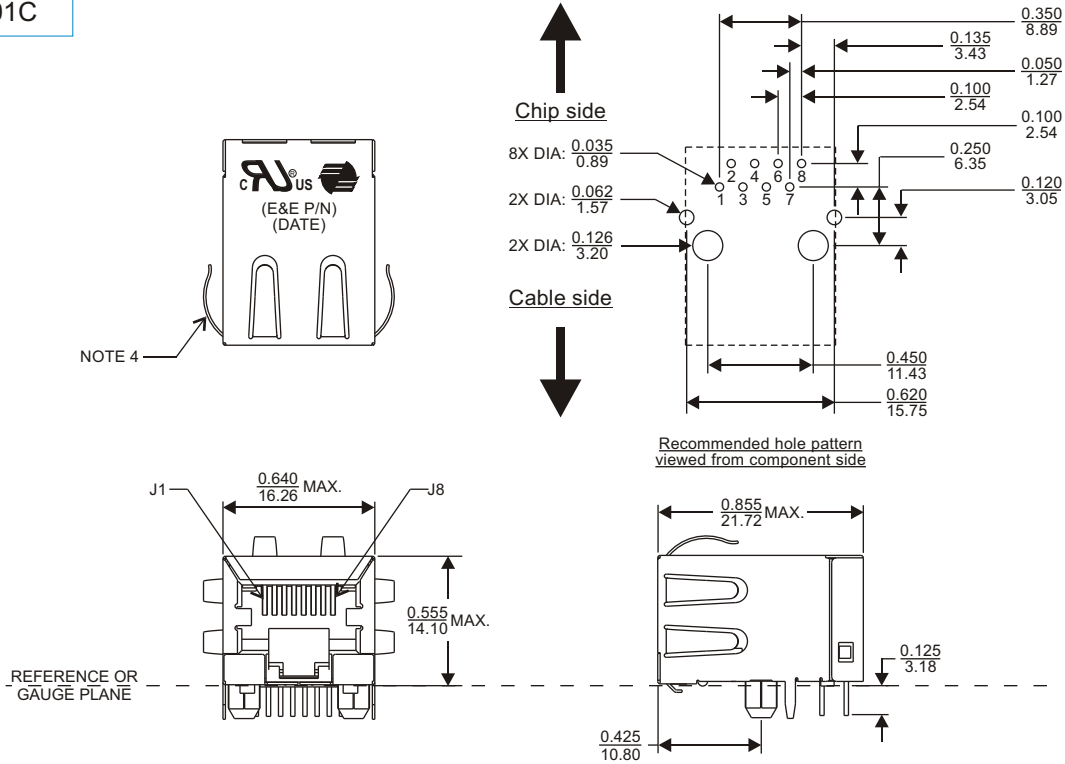

All dimensions are specified in  $\frac{\text{inch}}{\text{mm}}$  with higher precedence in inch.  
Unless otherwise specified, all tolerances are  $\pm \frac{0.010}{0.25}$ .

LEDs COLOR AND POLARITY

MJ11D-01A	LED (LEFT)		LED (RIGHT)			
	COLOR	POLARITY		COLOR	POLARITY	
 		PIN 9	PIN 10		PIN 11	PIN 12
	GREEN	+	-	YELLOW	+	-
MJ11D-01B	LED (LEFT)		LED (RIGHT)			
	COLOR	POLARITY		COLOR	POLARITY	
 		PIN 9	PIN 10		PIN 12	PIN 11
	GREEN	+	-	YELLOW	+	-




LED SPECIFICATION @25°C, FORWARD CURRENT = 20mA


Standard Color	Typical Wavelength (nm)	Forward Voltage (volt)	
		Typical	Maximum
Green	565	2.2	2.5
Yellow	590	2.1	2.5

SCHEMATICS

H301

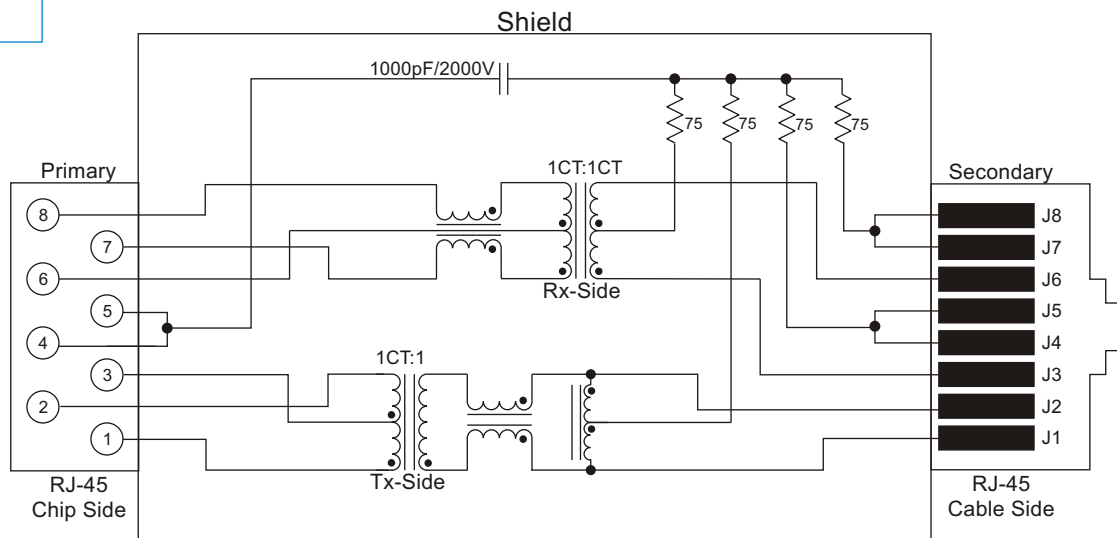

H34Y

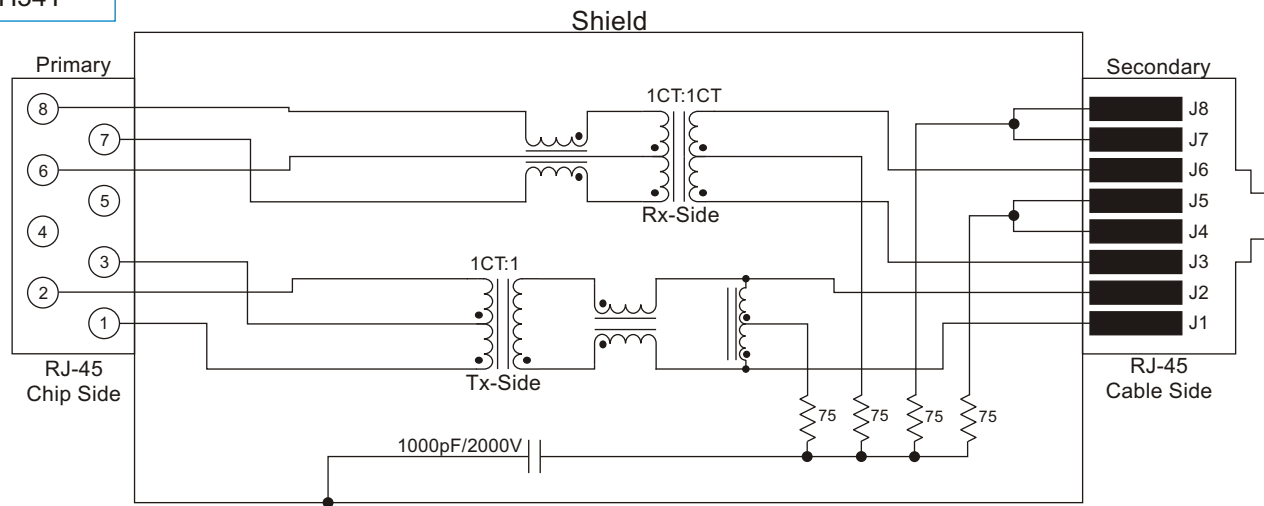

FOR MORE INFORMATION, PLEASE CONTACT

HEADQUARTER

1/F., Harbour View 1, No.12 Science Park East Avenue,  
Phase II, Hong Kong Science Park, Shatin, N.T.  
Hong Kong

Tel: (852) 2954 3333 Fax: (852) 2954 3304

Email: eempl@eleceltek.com

Website: <http://www.eleceltek.com> / [www.eemagnetic.com](http://www.eemagnetic.com)

Information herein is for reference only and subject to change without notice. It does not constitute any representation, warranty or commitment of the company in respect of the products in any aspect. All logos, brands and product names mentioned herein are trademarks or registered trademarks of their respective owners. The company does not assume any liability arising out of the application or use of any product or circuit described herein. Copyrights 2009, E & E Magnetic Products Limited.