



# MMBFJ270


## P-CHANNEL SWITCH

### FEATURES

- This device is designed for low level analog switching sample and hold circuits and chopper stabilized amplifiers
- In compliance with EU RoHS 2002/95/EC directives


### MECHANICAL DATA

- Case: SOT-23, Plastic
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 0.008gram
- Marking : 270



SOT-23

Unit: inch ( mm )

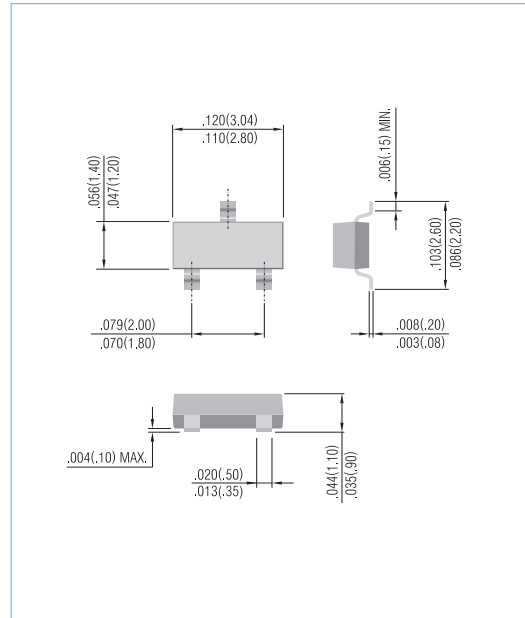

### ABSOLUTE MAXIMUM RATINGS $T_J=25^\circ\text{C}$

PARAMETER	SYMBOL	VALUE	UNITS
Drain-Gate Voltage	$V_{DG}$	-30	V
Gate-Source Voltage	$V_{GS}$	30	V
Forward Gate Current	$I_{GF}$	50	mA
Operating and Storage Junction Temperature Range	$T_J, T_{STG}$	-55 to +150	$^\circ\text{C}$

### THERMAL CHARACTERISTICS

PARAMETER	SYMBOL	VALUE	UNITS
Total Device Dissipation Derate above $25^\circ\text{C}$	$P_D$	225 1.8	mW mW/ $^\circ\text{C}$
Thermal Resistance, Junction to Ambient (Note 1)	$R_{\theta JA}$	556	$^\circ\text{C/W}$

Note 1 : Device mounted on FR-4 PCB, 70 x 60 x 1mm.

PAN JIT RESERVES THE RIGHT TO IMPROVE PRODUCT DESIGN,FUNCTIONS AND RELIABILITY WITHOUT NOTICE



## MMBFJ270


### ELECTRICAL CHARACTERISTICS $T_J=25^{\circ}\text{C}$

PARAMETER	SYMBOL	TEST CONDITION	MIN.	MAX.	UNITS
Off Characteristics					
Gate-Source Breakdown Voltage	$V_{(BR)GSS}$	$I_G=1.0\mu\text{A}, V_{DS}=0$	30	-	V
Gate Reverse Current	$I_{GSS}$	$V_{GS}=20\text{V}, V_{DS}=0$	-	200	pA
Gate-Source Cutoff Voltage	$V_{GS(OFF)}$	$V_{DS}=-15\text{V}, I_D=-1.0\text{nA}$	0.5	2.0	V
On Characteristics					
Zero-Gate Voltage Drain Current	$I_{DSS}$	$V_{DS}=-15\text{V}, V_{GS}=0$	-2.0	-15	mA
Forward Transferconductance	gfs	$V_{GS}=0\text{V}, V_{DS}=15\text{V}, f=1.0\text{kHz}$	6000	15000	$\mu\text{mhos}$




# MMBFJ270


**Common Drain-Source**

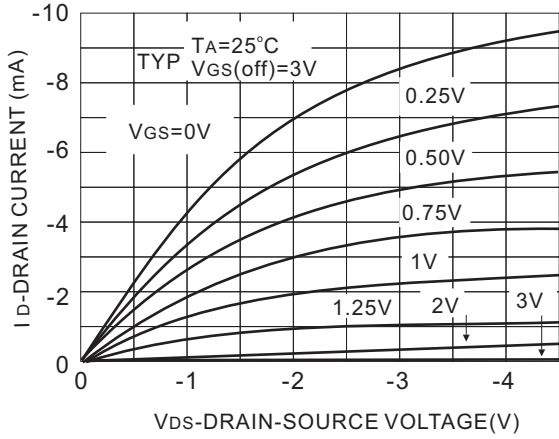


**Transfer Characteristics**

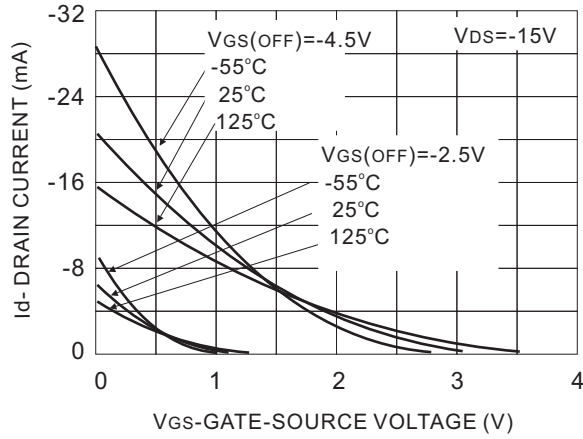


**Power Derating**

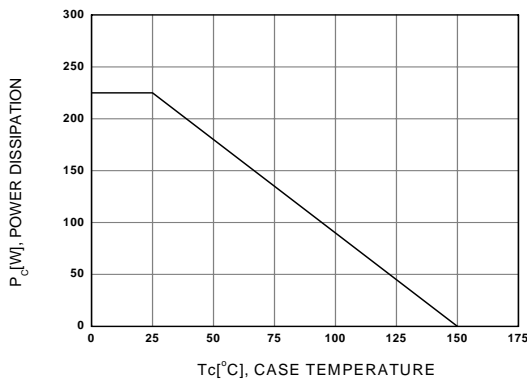


**Parameter Interactions**

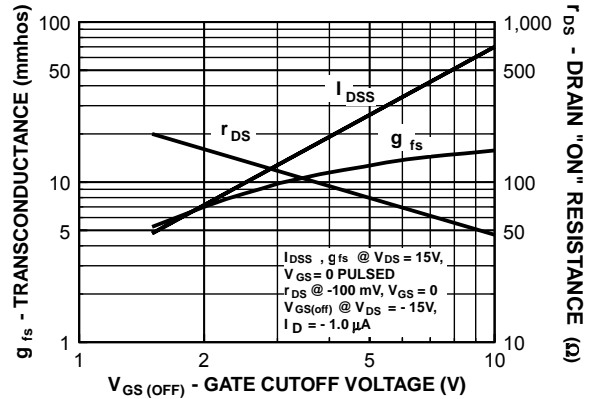

**Normalized Drain Resistance vs Bias Voltage**

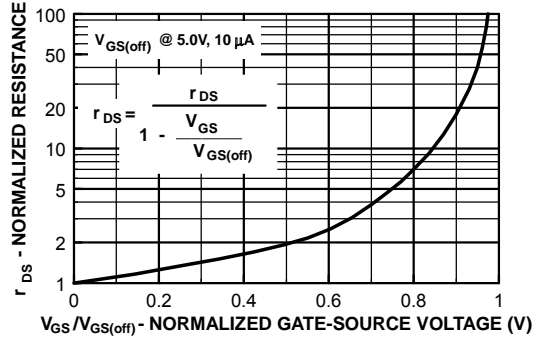


**Output Conductance vs Drain Current**

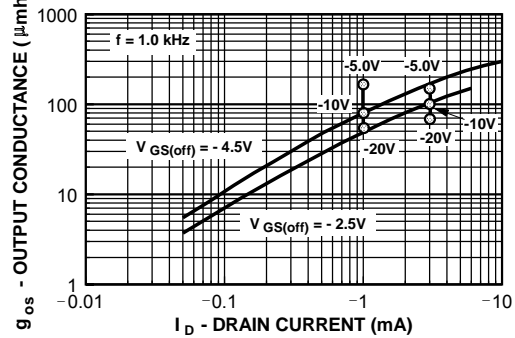




# MMBFJ270


**Transconductance vs Drain Current**

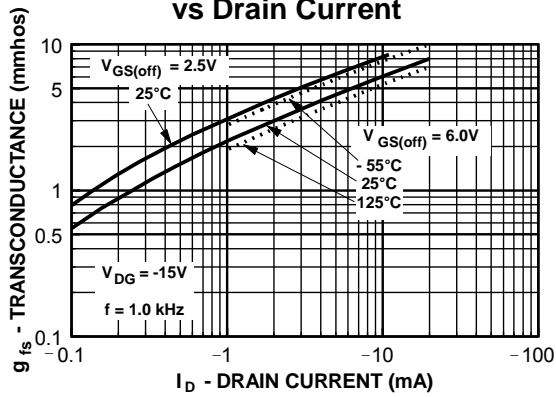


**Capacitance vs Voltage**

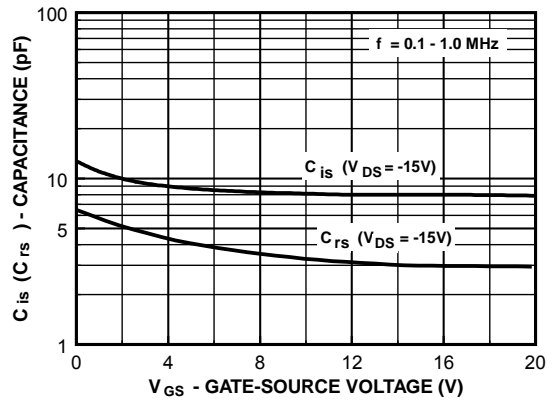

**Noise Voltage vs Frequency**

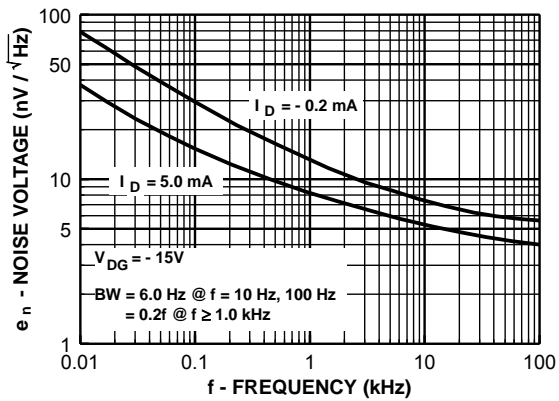


**Channel Resistance vs Temperature**

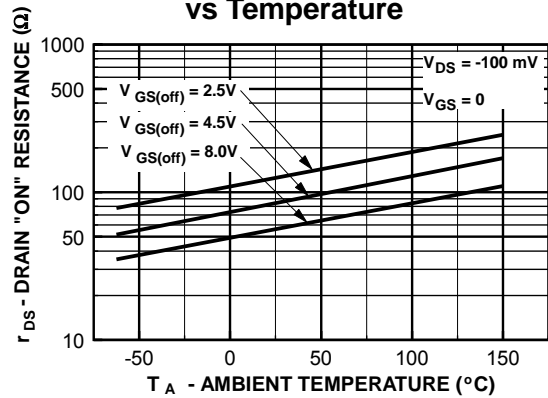



# MMBFJ270

## MOUNTING PAD LAYOUT

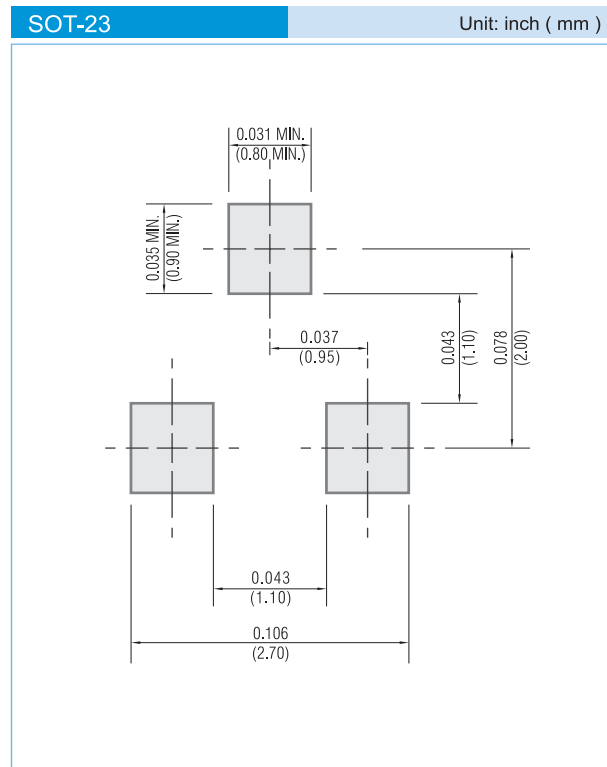

## ORDER INFORMATION

- Packing information
  - T/R - 12K per 13" plastic Reel
  - T/R - 3K per 7" plastic Reel

## LEGAL STATEMENT

### Copyright PanJit International, Inc 2009

The information presented in this document is believed to be accurate and reliable. The specifications and information herein are subject to change without notice. Pan Jit makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. Pan Jit products are not authorized for use in life support devices or systems. Pan Jit does not convey any license under its patent rights or rights of others.