



Micro Commercial Components

Micro Commercial Components
 20736 Marilla Street Chatsworth
 CA 91311
 Phone: (818) 701-4933
 Fax: (818) 701-4939

MMST5401

Features


- Power dissipation: 200mW ($T_{amb}=25^{\circ}C$)
- Collector current: -0.2A
- Marking : K4M
- Operating and Storage junction temperature range
 -55°C to + 150°C
- Case Material:Molded Plastic. UL Flammability
 Classificatio Rating 94-0 and MSL Rating 1

PNP Small Signal Transistors

Electrical Characteristics @ 25°C Unless Otherwise Specified


Symbol	Parameter	Min	Max	Units
OFF CHARACTERISTICS ⁽²⁾				
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage ($I_C=-1.0mA_{dc}$, $I_B=0$)	-150	---	Vdc
$V_{(BR)CBO}$	Collector-Base Breakdown Voltage ($I_C=-100\mu A_{dc}$, $I_E=0$)	-160	---	Vdc
$V_{(BR)EBO}$	Collector-Emitter Breakdown Voltage ($I_E=-10\mu A_{dc}$, $I_C=0$)	-5.0	---	Vdc
I_{CEO}	Collector Cutoff Current ($V_{CB}=-120V_{dc}$, $I_E=0V_{dc}$)	---	-50	nAdc
I_{EBO}	Emitter Cutoff Current ($V_{EB}=-3V_{dc}$, $I_C=0V_{dc}$)	---	-50	nAdc
h_{FE}	DC Current Gain ($I_C=-1mA_{dc}$, $V_{CE}=-5V_{dc}$) ($I_C=-10mA_{dc}$, $V_{CE}=-5V_{dc}$) ($I_C=-50mA_{dc}$, $V_{CE}=-5V_{dc}$)	50 60 50	--- 240 ---	--- --- ---
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage ($I_C=-10mA_{dc}$, $I_B=-1mA_{dc}$) ($I_C=-50mA_{dc}$, $I_B=-5mA_{dc}$)	---	-0.2 -0.5	Vdc
$V_{BE(sat)}$	Base-Emitter Saturation Voltage ($I_C=-10mA_{dc}$, $I_B=-1mA_{dc}$) ($I_C=-50mA_{dc}$, $I_B=-5mA_{dc}$)	---	-1 -1	Vdc
f_T	Current Gain-Bandwidth Product ($V_{CE}=-10V_{dc}$, $I_C=-10mA_{dc}$, $f=100MHz$)	100	300	MHz
C_{ob}	Output Capacitance ($V_{CB}=-10V_{dc}$, $f=1.0MHz$, $I_E=0$)	---	6	pF
NF	Noise Figure ($V_{CE}=-5V$, $I_C=-0.2mA$, $f=1KHz$, $R_g=10\Omega$)	---	8	dB

SOT-323

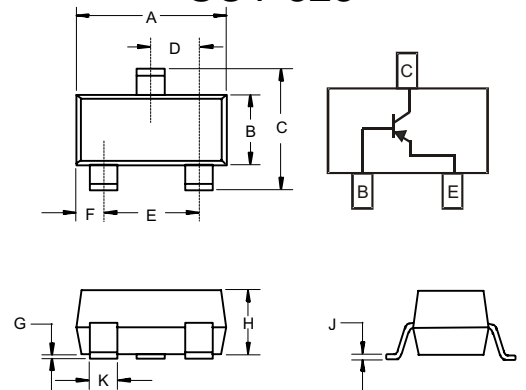

DIM	DIMENSIONS				NOTE
	INCHES		MM		
A	.071	.087	1.80	2.20	
B	.045	.053	1.15	1.35	
C	.079	.087	2.00	2.20	
D	.026 Nominal		0.65Nominal		
E	.047	.055	1.20	1.40	
F	.012	.016	.30	.40	
G	.000	.004	.000	.100	
H	.035	.039	.90	1.00	
J	.004	.010	.100	.250	
K	.012	.016	.30	.40	

Suggested Solder Pad Layout





Micro Commercial Components

Ordering Information

Device	Packing
(Part Number)-TP	Tape&Reel;3Kpcs/Reel

*****IMPORTANT NOTICE*****

Micro Commercial Components Corp . reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes .
Micro Commercial Components Corp . does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp* . and all the companies whose products are represented on our website, harmless against all damages.

*****APPLICATIONS DISCLAIMER*****

Products offer by *Micro Commercial Components Corp* . are not intended for use in Medical, Aerospace or Military Applications.