

# Mini-Mox

## Precision Thick Film Axial Terminal High Voltage/High Resistance



### FEATURES

- Wide resistance ranges
- Silicone or epoxy coating
- Metal oxide resistive element

### APPLICATIONS

- Avionics
- Medical electronics
- High gain feedback applications
- Current pulse limiters
- Vacuum and space application

The Mini-Mox resistor is very versatile, covering a wide resistance range as well as a wide range of operating voltages. Provided with tolerances down to 0.5%, the Mini-Mox resistor works well in precision circuits.

### SERIES SPECIFICATIONS

| Ohmite Series                               | Resistance Range (Ohms) | Power        | Voltage Rating | Available Tolerances* | Capacitance (pf) |
|---|-------------------------|--------------|----------------|-----------------------|------------------|
| <b>• High-temperature (silicone coated)</b> |                         | <b>@70°C</b> |                |                       |                  |
| MOX-400-22                                  | 500Ω to 300,000M        | 0.35W        | 2,500V         | 1% to 20%             | 1.00             |
| MOX-750-22                                  | 750Ω to 600,000M        | 0.70W        | 5,000V         | 1% to 20%             | 0.75             |
| MOX1125-22                                  | 1K to 1,000,000M        | 1.40W        | 7,500V         | 1% to 20%             | 0.25             |
| <b>• Standard (epoxy coated)</b>            |                         | <b>@25°C</b> |                |                       |                  |
| MOX-400-23                                  | 500Ω to 300,000M        | 0.75W        | 2,500V         | 0.5% to 20%           | 1.00             |
| MOX-750-23                                  | 1K to 600,000M          | 1.00W        | 5,000V         | 0.5% to 20%           | 0.75             |
| MOX1125-23                                  | 1K to 1,000,000M        | 1.50W        | 7,500V         | 0.5% to 20%           | 0.25             |

\*Some tolerances are not available over the entire resistance range.


### CHARACTERISTICS

|                              |  |
|------------------------------|--|
| <b>Resistor</b>              | Metal Oxide  |
| <b>Coating</b>               | Silicone or Epoxy  |
| <b>Core</b>                  | Alumina  |
| <b>Terminals</b>             | Solder-coated axial. RoHS solder composition is 96% Sn, 3.5% Ag, 0.5% Cu |
| <b>Resistance Range</b>      | 500Ω to 1 Teraohm  |
| <b>Power Rating</b>          | 0.35W to 1.5W  |
| <b>Voltage Rating</b>        | 2500V to 7.5KV   |
| <b>Tolerance</b>             | 0.5% to 20%; not all tolerances available in all values                  |
| <b>Operating Temperature</b> | -55°C to +220°C  |
| <b>Temp. Coefficient</b>     | 25ppm/°C 0° to 85°C available  |

### Performance Data

| Characteristic                         | Test Method                                      | Specification                           |
|--|--|---|
| <b>Humidity</b>                        | MIL-STD-202, Method 103B, Condition B            | ±0.25%                                  |
| <b>Dielectric Withstanding Voltage</b> | MIL-STD-202, Method 301, 750V                    | ±0.25%                                  |
| <b>Insulation Resistance</b>           | MIL-STD-202, Method 302, Condition A or B        | >10,000M or greater dry                 |
| <b>Thermal Shock</b>                   | MIL-STD-202, Method 107G, Condition B, B-1, or F | ±0.20%                                  |
| <b>Load Life</b>                       | MIL-STD-202, Method 108A, Condition D            | ±2.0%                                   |
| <b>Resistance to Solvents</b>          | MIL-STD-202, Method 215G                         | Acceptable for the Standard Series Only |
| <b>Terminal Strength</b>               | MIL-STD-202, Method 211A, Condition A or B       | ±0.25%                                  |
| <b>Shock (Specified Pulse)</b>         | MIL-STD-202, Method 213B, Condition I            | ±0.25%                                  |
| <b>Vibration, High Frequency</b>       | MIL-STD-202, Method 204D, Condition D            | ±0.20%                                  |
| <b>Power Conditioning</b>              | MIL-R-49462A, Par 4.8                            | ±0.50%                                  |
| <b>Solderability</b>                   | MIL-STD-202, Method 208F                         | >95% Coverage                           |

### Derating

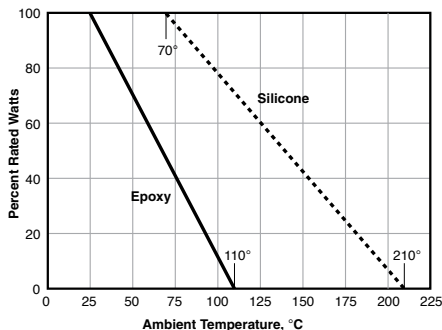

(continued)

# Mini-Mox

## Precision Thick Film Axial Terminal High Voltage/High Resistance


### STANDARD TEMP./VOLTAGE COEFFICIENTS OF RESISTANCE

| Resistor Series | Temp. Coeff. of Resistance |             | Voltage Coeff. of Resistance** |             |                 |
|-----------------|----------------------------|-------------|--------------------------------|-------------|-----------------|
|                 | 25 PPM/°C                  | 50 PPM/°C   | 100 PPM/°C                     | < 2PPM/Volt | < 5PPM/Volt     |
| MOX-400         | 1K-99M                     | 100M-450M   | 451M-30,000M                   | 1K-1,000M   | 1,001M-100,000M |
| MOX-750         | 1K-199M                    | 200M-900M   | 901M-70,000M                   | 1K-2,000M   | 2,001M-100,000M |
| MOX1125         | 1K-299M                    | 300M-1,350M | 1,351M-100,000M                | 1K-3,000M   | 3,001M-100,000M |

\*TCR of 25ppm for temperature range of 0°C-85°C. TCR of 50ppm and 100ppm for -55°C to 125°C. Consult factory for TCR values operating higher than 125°C  
\*\*For tighter VCs please contact Ohmite.


### DIMENSIONS

(in./mm)



| Series  | Power | A max.         | B max.        |
|---|-------|----------------|---------------|
| <b>• High-temperature (silicone coated) @70°C</b> |       |                |               |
| MOX-400-22  | 0.35W | 0.510" / 12.95 | 0.140" / 3.56 |
| MOX-750-22  | 0.70W | 0.820" / 20.83 | 0.140" / 3.56 |
| MOX1125-22  | 1.40W | 1.210" / 30.73 | 0.140" / 3.56 |
| <b>• Standard (epoxy coated) @25°C</b>            |       |                |               |
| MOX-400-23  | 0.75W | 0.580" / 14.78 | 0.165" / 4.19 |
| MOX-750-23  | 1.00W | 0.880" / 22.35 | 0.165" / 4.19 |
| MOX1125-23  | 1.50W | 1.270" / 32.26 | 0.165" / 4.19 |

### HOW TO ORDER

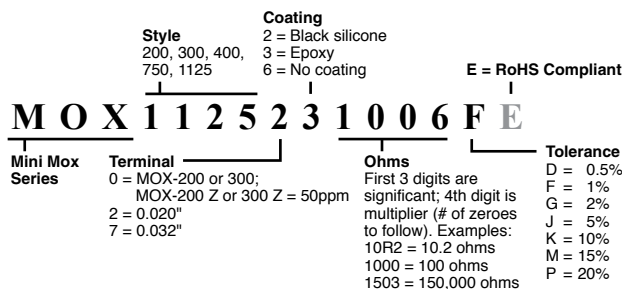

Not all tolerances available in all values.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Ohmite:

[MOX-400237505F](#) [MOX1125231009J](#) [MOX1125231009F](#) [MOX400231006D](#) [MOX-400231004F](#) [MOX-400231006F](#)  
[MOX750232006F](#) [MOX-400232505F](#) [MOX-400232504F](#) [MOX750235005F](#) [MOX750-23-5006G](#) [MOX-400232006F](#)  
[MOX-750235007F](#) [MOX1125234007J](#) [MOX-750232402F](#) [MOX-400231506F](#) [MOX-400235004F](#) [MOX1125235005F](#)  
[MOX-750232505F](#) [MOX-750237505F](#) [MOX1125231008F](#) [MOX1125-23-1004F](#) [MOX1125231007F](#) [MOX-](#)  
[400231505F](#) [MOX-750231506F](#) [MOX-400231008F](#) [MOX-400231007F](#) [MOX-400231008J](#) [MOX-400231005F](#) [MOX-](#)  
[750237506F](#) [MOX-750231008F](#) [MOX-750231007F](#) [MOX-400235006F](#) [MOX-400235005F](#) [MOX-400221006F](#)  
[MOX1125-23-1007D](#) [MOX1125-23-1006F](#) [MOX-400224008K](#) [MOX-750232506F](#) [MOX1125231008J](#) [MOX-](#)  
[750233006F](#) [MOX-400231006JE](#) [MOX-750232505G](#) [MOX-750232005F](#) [MOX-750235004F](#) [MOX-750235003F](#)  
[MOX-750231002F](#) [MOX-750232505FE](#) [MOX1125231005FE](#) [MOX1125231006FE](#) [MOX1125231006JE](#)  
[MOX1125231007JE](#) [MOX-400224005FE](#) [MOX-400231005FE](#) [MOX-400231005JE](#) [MOX-400231006FE](#) [MOX-](#)  
[400231007JE](#) [MOX-750231005FE](#) [MOX-750231005JE](#) [MOX-750231006FE](#) [MOX-750231006JE](#) [MOX-750231008FE](#)  
[MOX112523100AK](#) [MOX400234006JE](#) [MOX-750231004F](#) [MOX-750232004F](#) [MOX-750235006FE](#) [MOX-](#)  
[400235005F-E](#) [MOX-400231506F-E](#) [MOX-400232504F-E](#) [MOX-400232505F-E](#) [MOX-400231505F-E](#) [MOX-](#)  
[400237505F-E](#) [MOX-400232006F-E](#) [MOX-400235006F-E](#) [MOX-400235004F-E](#) [MOX-750231007FE](#) [MOX-](#)  
[750231506FE](#) [MOX-750232506FE](#) [MOX-750237505FE](#) [MOX-750237506FE](#) [MOX1125231008DE](#) [MOX1125004F](#)  
[MOX1125235006G](#) [MOX400221005J](#) [MOX1125231002J](#) [MOX-750235006JE](#) [MOX-400235007J](#) [MOX750-23-5001F](#)  
[MOX750-23-1001F](#) [MOX-400231007FE](#) [MOX-750231007JE](#) [MOX-400235007FE](#) [MOX1125235004F](#) [mox-](#)  
[750221006j](#) [MOX400223007JE](#) [MOX400222005J](#) [MOX400225005J](#) [MOX-400232005FE](#) [MOX1125231009FE](#)