

MS-108-5

Mains switching Reed Sensor • pitch 20.32 mm



Electrical Characteristics

Contact form		A
Contact rating max.	W / VA	10
Switching current max.	A	0.5
Carry current max.	A	1.5
Switching voltage max.	VDC	200
	VAC	260
Breakdown voltage min.	VDC	450
Contact resistance (initial) max.	mΩ	100
Insulation resistance min.	Ω	10 ¹⁰
Capacitance typ.	pF	0.2

Magnetical Characteristics

Pull in range available ¹	AT	20-35
--------------------------------------	----	-------


¹ AT range stated for unmodified Reed Switch

Operating Characteristics

Operate time (incl. bounce) max.	ms	0.6
Release time max.	ms	0.2
Switching frequency max.	Hz	400
Resonant frequency typ.	Hz	3,900
Vibration (50-2000 Hz)	g	30
Shock (1/2 sin 11 ms)	g	100
Operating temperature	°C	-20 to +85

Dimensions

in mm

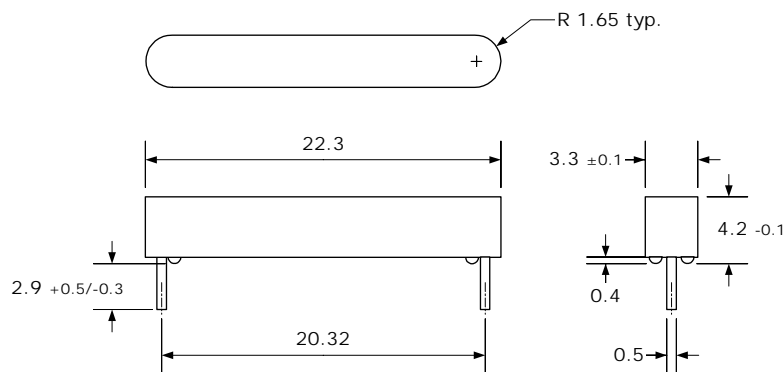

Ordering Information

Series	AT Range
MS-108-5	3 = 20-25 / 4 = 25-30 / 5 = 30-35

Ordering example: MS-108-5-3 describes MS-108-5 with 20-25 AT

Customized types available.