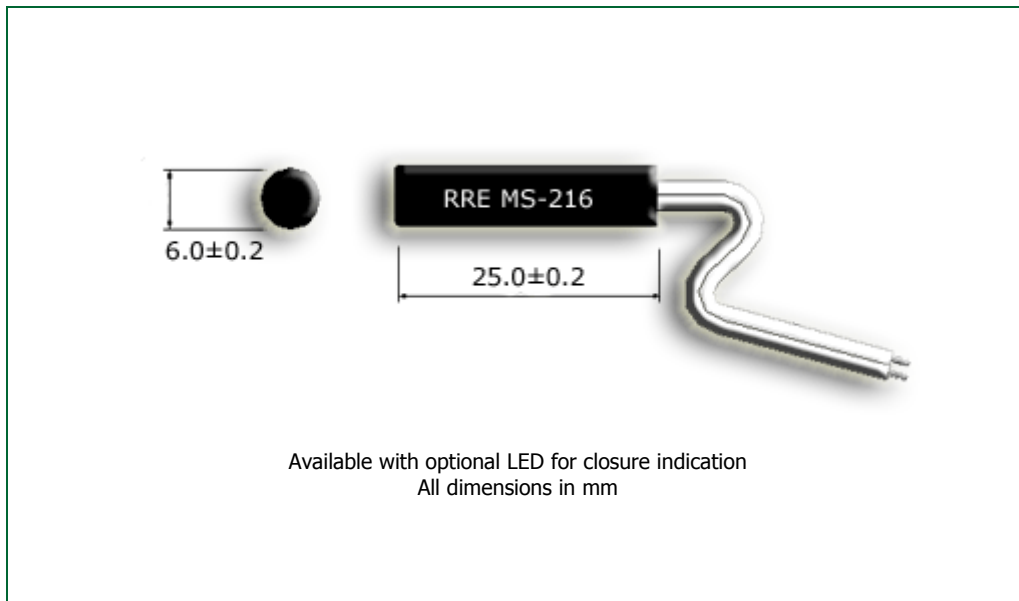


MS-216 Cylindrical Magnet Sensor

Standard Size, 6.0 mm Diameter x 25.4 mm, 30 W



- ◆ Does not require power for operation
- ◆ Omni-polar device; actuates with either pole of magnet
- ◆ Normally open (NO) contact, others available on request
- ◆ Three magnetic sensitivity bands
- ◆ Contact rating of up to 30W
- ◆ Lead (Pb) free and RoHS compliant

🔧 Applications

This magnet sensor is suitable for use in the following applications and many others: coffee machines, detergent level sensing in washing machines, dishwashers, fluid level sensing, anchor and rudder position sensing in boats, anemometers, treadmills, bicycles...

📊 Specification

| | | |
|---|-----------------|------------|
| Contact Form | | A |
| Contact Rating (max) | W / VA | 10 |
| Switching Current (max) | A | 0.5 |
| Carry Current (max) | A | 1.5 |
| Switching Voltage (max) | V _{DC} | 180 |
| Breakdown Voltage (min) | V _{DC} | 200 |
| Initial Contact Resistance (max) | mΩ | 150 |
| Operating Temperature | °C | -40 to +70 |
| Shock Resistance (1/2Sin wave for 11ms) | g | 50 |
| Vibration Resistance (10-2000Hz) | g | 20 |

📦 Ordering Code

MS-216-(Operate AT Code)-(Cable length in mm)-(Lead Code)

| OAT Code | | Lead Code | |
|----------|---------|-----------|----------------------------|
| 1 | 10 – 15 | S | Stripped to 5mm |
| 2 | 15 – 20 | T | Stripped to 5mm and Tinned |
| 3 | 20 – 25 | M | Molex Connector |

🔧 Example

MS-216-1-500-M denotes 10-15 Operate AT, with 500 mm cable length and Molex connectors.

Due to continual improvement, specifications are subject to change without notice

www.reed-sensor.com


15 March 2008


MS-216 Cylindrical Magnet Sensor

Actuation Distances


Operate and release distances for the MS-216 cylindrical sensor, in two AT bands when actuated (as shown in the sketches) with NdFeB standard magnets is shown below. All distances given are in mm with tolerances of $\pm 0.5\text{mm}$. Although some of the AT band / magnet combinations will produce similar actuating distances, selecting the right AT band and magnet for an application is important and can be done by going through our AT band FAQ and our magnet selection guide.


MS-216-1 (10-15 AT)

| Actuation Sketch | Magnet | Dimensions | Operate Distance | Release Distance |
|---|--------|-------------------------------|------------------|------------------|
|  | NDR-T | 4.0 x 1.5 x 1.5 | 0.5 - 1.5 | 1.5 - 2.5 |
| | NDC-T | $\varnothing 2.0 \times 4.0$ | 1.0 - 2.0 | 1.5 - 3.0 |
| | NDR-S | 6.0 x 2.5 x 2.5 | 4.5 - 6.5 | 6.0 - 8.0 |
| | NDC-S | $\varnothing 3.0 \times 7.0$ | 5.5 - 8.0 | 7.5 - 9.5 |
| | NDR-M | 8.0 x 3.0 x 3.0 | 7.5 - 10.0 | 10.0 - 11.0 |
| | NDC-M | $\varnothing 4.0 \times 10.0$ | 10.5 - 13.5 | 13.0 - 15.0 |
| | NDR-L | 19.0 x 4.0 x 4.0 | 15.0 - 19.5 | 18.5 - 21.5 |
| | NDC-L | $\varnothing 8.0 \times 15.0$ | 28.0 - 36.0 | 33.0 - 39.0 |

| Actuation Sketch | Magnet | Dimensions | Operate Distance | Release Distance |
|---|--------|-------------------------------|------------------|------------------|
|  | NDR-T | 4.0 x 1.5 x 1.5 | 0.5 - 2.5 | 1.5 - 3.5 |
| | NDC-T | $\varnothing 2.0 \times 4.0$ | 1.5 - 3.5 | 2.5 - 4.5 |
| | NDR-S | 6.0 x 2.5 x 2.5 | 6.0 - 8.5 | 8.0 - 9.5 |
| | NDC-S | $\varnothing 3.0 \times 7.0$ | 7.5 - 9.5 | 9.5 - 10.5 |
| | NDR-M | 8.0 x 3.0 x 3.0 | 9.5 - 11.5 | 11.0 - 13.0 |
| | NDC-M | $\varnothing 4.0 \times 10.0$ | 13.0 - 16.5 | 15.0 - 18.5 |
| | NDR-L | 19.0 x 4.0 x 4.0 | 18.0 - 22.0 | 21.0 - 24.0 |
| | NDC-L | $\varnothing 8.0 \times 15.0$ | 28.0 - 34.0 | 32.0 - 37.0 |

MS-216-2 (15-20 AT)

| Actuation Sketch | Magnet | Dimensions | Operate Distance | Release Distance |
|---|--------|-------------------------------|------------------|------------------|
|  | NDR-T | 4.0 x 1.5 x 1.5 | N/A | N/A |
| | NDC-T | $\varnothing 2.0 \times 4.0$ | N/A | N/A |
| | NDR-S | 6.0 x 2.5 x 2.5 | 2.5 - 4.5 | 5.0 - 6.0 |
| | NDC-S | $\varnothing 3.0 \times 7.0$ | 3.5 - 5.5 | 6.5 - 7.5 |
| | NDR-M | 8.0 x 3.0 x 3.0 | 5.0 - 7.5 | 8.0 - 10.0 |
| | NDC-M | $\varnothing 4.0 \times 10.0$ | 7.5 - 10.5 | 11.0 - 13.0 |
| | NDR-L | 19.0 x 4.0 x 4.0 | 11.0 - 15.0 | 16.5 - 18.5 |
| | NDC-L | $\varnothing 8.0 \times 15.0$ | 23.0 - 28.0 | 31.0 - 33.0 |

| Actuation Sketch | Magnet | Dimensions | Operate Distance | Release Distance |
|---|--------|-------------------------------|------------------|------------------|
|  | NDR-T | 4.0 x 1.5 x 1.5 | N/A | N/A |
| | NDC-T | $\varnothing 2.0 \times 4.0$ | 0.0 - 1.0 | 0.5 - 2.0 |
| | NDR-S | 6.0 x 2.5 x 2.5 | 4.0 - 6.0 | 7.0 - 8.0 |
| | NDC-S | $\varnothing 3.0 \times 7.0$ | 5.5 - 7.5 | 8.5 - 9.5 |
| | NDR-M | 8.0 x 3.0 x 3.0 | 7.0 - 9.5 | 10.0 - 11.0 |
| | NDC-M | $\varnothing 4.0 \times 10.0$ | 11.0 - 13.0 | 13.5 - 15.0 |
| | NDR-L | 19.0 x 4.0 x 4.0 | 15.0 - 18.0 | 20.0 - 21.0 |
| | NDC-L | $\varnothing 8.0 \times 15.0$ | 25.0 - 28.0 | 31.0 - 32.0 |

Due to continual improvement, specifications are subject to change without notice

www.reed-sensor.com

1 August 2008