

# Rail-to-Rail Output, Low Voltage, High Slew Rate, Wide Bandwidth Dual Operational Amplifiers

## FEATURES

- CMOS rail to rail output
- 2.7 to 6.5V single supply operation
- Gain-Bandwidth Product : 12MHz
- High slew rate : 6V/ $\mu$ s
- No crossover distortion
- Space saving SOP8 package
- Cost efficient
- Pin assignments is the same as the general-purpose dual operational amplifiers


## APPLICATIONS

- Active filters
- Servo amplifier
- Multimedia system
- Digital to Analog Converter buffers
- Laptop、Set-Top BOX
- Microphone preamplifier
- Cross-reference to low voltage application :
  - NJM2100, BA4510
  - TLV2632, TLV2772
  - TS462

## DESCRIPTION


The MS2100 is high slew rate CMOS operation amplifier optimize for low voltage, single supply operation. It designed to be used for general purpose amplifier of general electronic equipment for consumer appliances.

## BLOCK DIAGRAM

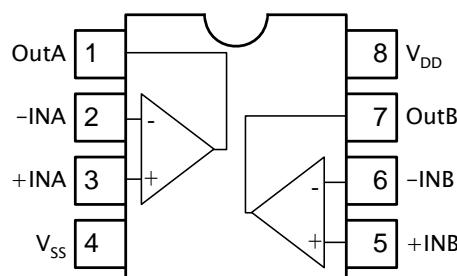

## PIN CONFIGURATION

| Symbol          | Pin | Description           |
|-----------------|-----|-----------------------|
| OutA            | 1   | output A              |
| -INA            | 2   | inverting input A     |
| +INA            | 3   | non-inverting input A |
| V <sub>SS</sub> | 4   | negative supply       |
| +INB            | 5   | non-inverting input B |
| -INB            | 6   | inverting input B     |
| OutB            | 7   | output B              |
| V <sub>DD</sub> | 8   | positive supply       |

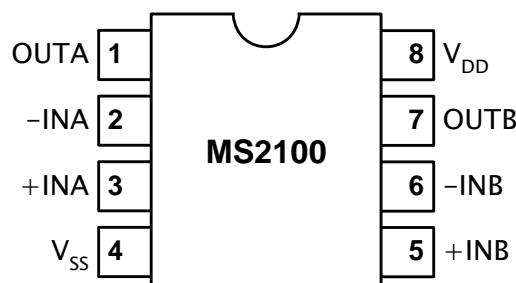

**ORDERING INFORMATION**

| Package               | Part number | Packaging Marking | Transport Media          |
|-----------------------|-------------|-------------------|--------------------------|
| 8-Pin SOP (lead free) | MS2100GTR   | MS2100 (G)        | 2.5k Units Tape and Reel |
| 8-Pin SOP (lead free) | MS2100GU    | MS2100 (G)        | 100 Units Tube           |

RoHS Compliance

**ABSOLUTE MAXIMUM RATINGS**

| Symbol            | Parameter   | Rating        | Unit |
|-------------------|---|---------------|------|
| V <sub>DD</sub>   | Supply Voltage  | 6.5           | V    |
| V <sub>ESD</sub>  | Electrostatic Handling  | -4000 to 4000 | V    |
| T <sub>STG</sub>  | Storage Temperature Range                                       | -65 to 150    | °C   |
| T <sub>A</sub>    | Operating Ambient Temperature Range                             | -40 to 85     | °C   |
| T <sub>J</sub>    | Maximum Junction Temperature                                    | 150           | °C   |
| T <sub>S</sub>    | Soldering Temperature, 10 seconds                               | 260           | °C   |
| R <sub>THJA</sub> | Thermal Resistance from Junction to Ambient in Free Air<br>SOP8 | 210           | °C/W |

**OPERATING RATINGS**

| Symbol          | Parameter      | Min | Typ | Max | Unit |
|-----------------|----------------|-----|-----|-----|------|
| V <sub>DD</sub> | Supply Voltage | 2.7 | -   | 6.5 | V    |

**5V ELECTRICAL CHARACTERISTICS**(Ta=25°C, V<sub>DD</sub>=5V, V<sub>SS</sub>=0V, V<sub>CM</sub>=V<sub>O</sub>=V<sub>DD</sub>/2; unless otherwise specified)


| Symbol                    | Parameter                            | Conditions  | Min | Typ                 | Max                 | Unit |
|---------------------------|--------------------------------------|---|-----|---------------------|---------------------|------|
| <b>DC Characteristics</b> |                                      |   |     |                     |                     |      |
| I <sub>Q</sub>            | Quiescent current                    | Dual Amplifiers                                       | -   | 2.6                 | -                   | mA   |
| V <sub>OS</sub>           | Input Offset Voltage                 |   | -   | 1                   | 5                   | mV   |
| CMRR                      | Common Mode Rejection Ratio          | 0 ≤ V <sub>CM</sub> ≤ 4V                              | 65  | 75                  | -                   | dB   |
| PSRR                      | Power supply rejection ratio         | Ripple = -20dBV, 100Hz                                | -   | 70                  | -                   | dB   |
| CS                        | Cannel separation                    | f = 10kHz   | -   | 78                  | -                   | dB   |
| V <sub>CM</sub>           | Common mode voltage                  | CMRR ≥ 50dB   | 0.2 | -                   | 4                   | V    |
| V <sub>O</sub>            | Output voltage swing                 | R <sub>L</sub> ≥ 2.5kΩ                                | -   | V <sub>DD</sub> -25 | V <sub>DD</sub> -15 | mV   |
| <b>AC Characteristics</b> |                                      |   |     |                     |                     |      |
| SR                        | Slew rate                            |   | -   | 6                   | -                   | V/μs |
| GBWP                      | Gain bandwidth product               |   | -   | 12                  | -                   | MHz  |
| THD+N                     | Total harmonic distortion plus noise | f = 1kHz, Av = -1<br>R <sub>L</sub> > 10k, Vin = 4Vpp | -   | -75                 | -70                 | dB   |

**2.7V ELECTRICAL CHARACTERISTICS**(Ta=25°C, V<sub>DD</sub>=2.7V, V<sub>SS</sub>=0V, V<sub>CM</sub>=V<sub>O</sub>=V<sub>DD</sub>/2; unless otherwise specified)


| Symbol                    | Parameter                            | Test conditions                                       | Min | Typ                 | Max                 | Unit |
|---------------------------|--------------------------------------|---|-----|---------------------|---------------------|------|
| <b>DC Characteristics</b> |                                      |   |     |                     |                     |      |
| I <sub>Q</sub>            | Quiescent current                    | Dual Amplifiers                                       | -   | 2.1                 | -                   | mA   |
| V <sub>OS</sub>           | Input offset voltage                 |   | -   | 1                   | 5                   | mV   |
| CMRR                      | Common mode rejection ratio          | 0 ≤ V <sub>CM</sub> ≤ 1.7V                            | 57  | 67                  | -                   | dB   |
| PSRR                      | Power supply rejection ratio         | Ripple = -20dBV, 100Hz                                | -   | 57                  | -                   | dB   |
| CS                        | Cannel separation                    | f = 10kHz   | -   | 78                  | -                   | dB   |
| V <sub>CM</sub>           | Common mode voltage                  | CMRR ≥ 50dB   | 0.2 | -                   | 1.7                 | V    |
| V <sub>O</sub>            | Output voltage swing                 | R <sub>L</sub> ≥ 2.5kΩ                                |     | V <sub>DD</sub> -70 | V <sub>DD</sub> -60 | mV   |
| <b>AC Characteristics</b> |                                      |   |     |                     |                     |      |
| SR                        | Slew rate                            |   | -   | 5                   | -                   | V/μs |
| GBWP                      | Gain bandwidth product               |   | -   | 11                  | -                   | MHz  |
| THD+N                     | Total harmonic distortion plus noise | f = 1kHz, Av = -1<br>R <sub>L</sub> > 10k, Vin = 2Vpp | -   | -70                 | -65                 | dB   |

## TYPICAL PERFORMANCE CHARACTERISTICS


(Ta=25°C; unless otherwise specified)

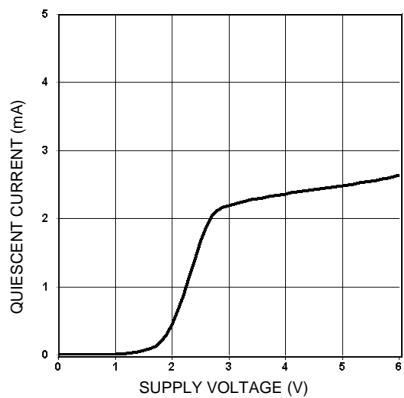


Quiescent current vs. supply voltage

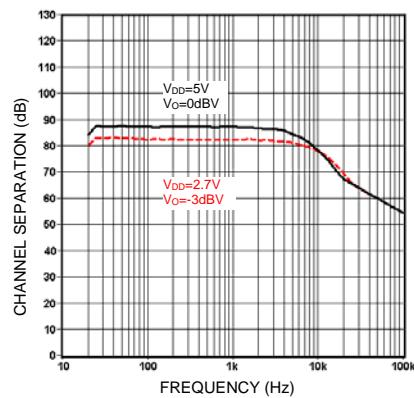


Channel separation vs. frequency

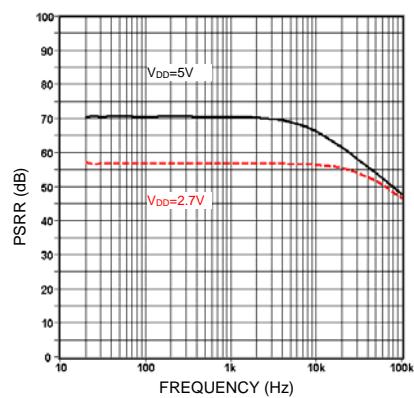


PSRR vs. frequency

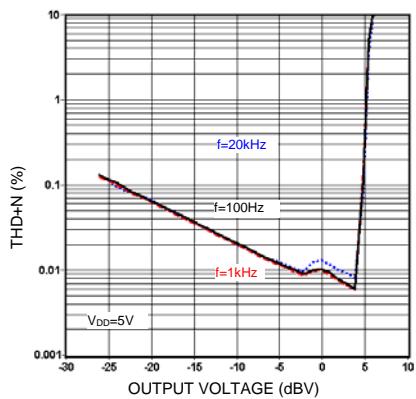


THD+N vs. output voltage

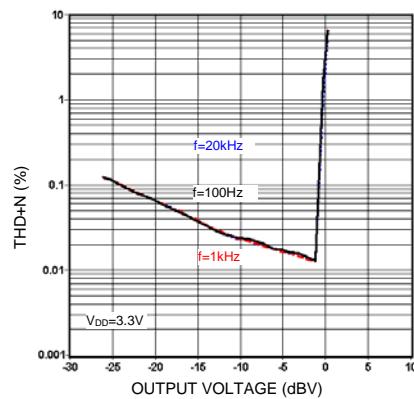







THD+N vs. output voltage

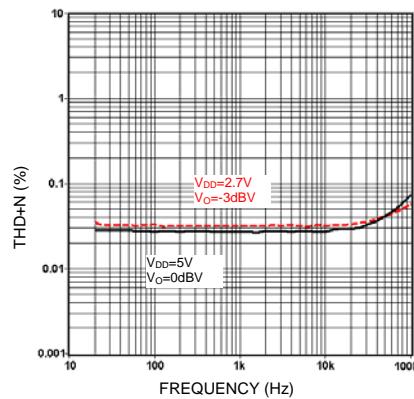

THD+N vs. frequency

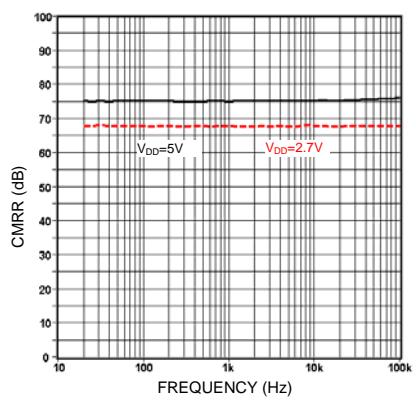


CMRR vs. frequency

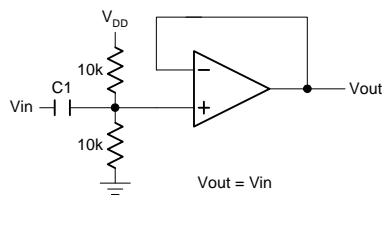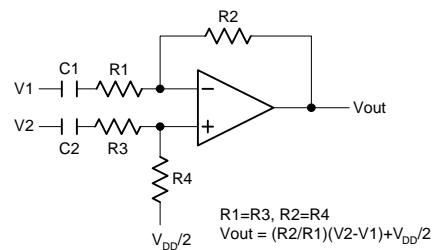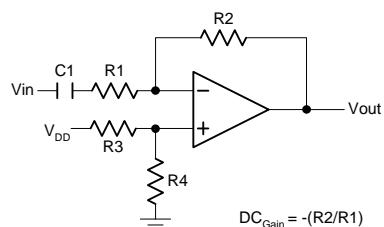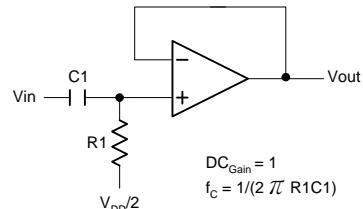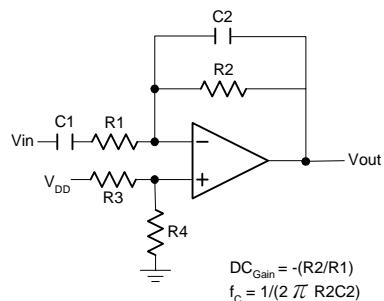
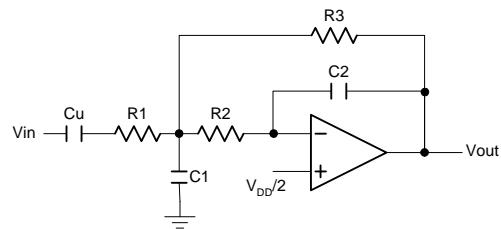
**APPLICATION INFORMATION (Single Supply)****Voltage Follower****Difference Amplifier****Inverting Amplifier****Simple High-Pass Filter****Simple Low-Pass Filter****2nd Order Multiple Feedback Low-Pass Filter**

## EXTERNAL DIMENSIONS

SOP8

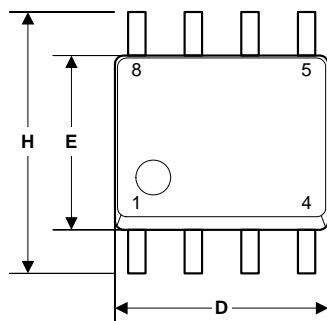

| Symbol | Dimension in mm |      | Dimension in inch |        |
|--------|-----------------|------|-------------------|--------|
|        | Min             | Max  | Min               | Max    |
| A      | 1.35            | 1.75 | 0.0532            | 0.0688 |
| A1     | 0.10            | 0.25 | 0.0040            | 0.0098 |
| B      | 0.33            | 0.51 | 0.013             | 0.020  |
| C      | 0.19            | 0.25 | 0.0075            | 0.0098 |
| D      | 4.80            | 5.00 | 0.1890            | 0.1968 |
| H      | 5.80            | 6.20 | 0.2284            | 0.2440 |
| E      | 3.80            | 4.00 | 0.1497            | 0.1574 |
| e      | 1.27 BSC        |      | 0.050 BSC         |        |
| L      | 0.40            | 1.27 | 0.016             | 0.050  |

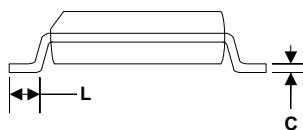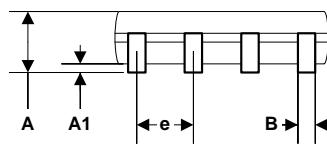

## TAPE AND REEL (Unit : mm)

SOP8

