

MT Series



Low Ohm Power Resistors



- Resistances from 0.003 to 0.10 Ohms
- Tolerance to $\pm 0.1\%$
- TCR's to ± 20 ppm/ $^{\circ}\text{C}$ (Four Terminal Version)
- For Current Sensing and Shunt Applications
- All Welded Construction
- Low Inductance ($<10\text{nH}$)
- Four Terminal Versions Available (Consult Factory)

SPECIFICATIONS

Specification	Value	
Resistance Range	0.003 to 0.10 Ohms	
Tolerances	2 Terminal: $\pm 1\%$ / $\pm 5\%$ (Contact Factory for Others) 4 Terminal: $\pm 0.1\%$ / $\pm 0.5\%$ / $\pm 1\%$ / $\pm 5\%$ (Contact Factory for Others)	
Temperature Coefficient	See Chart Below	
Inductance	$<10\text{nH}$	
Dielectric Strength	1000VAC (500VAC for MT-1A and MT-2A)	
Insulation Resistance	>1000 MOhms / Dry	
Environmental Performance (MIL-STD 202)	ΔR	Test Conditions
Load Life	$\pm 1\%$	70°C / 90 min ON / 30 min OFF / 1000 hr
Moisture Resistance	$\pm 1\%$	40°C / 90-95% RH / DC 0.1W / 1000 hr
Temperature Cycling	$\pm 1\%$	-40°C for 30 min / $+125^{\circ}\text{C}$ for 30 min / 1000 hr
Short Term Overload	$\pm 1\%$	5X rated power for 5 seconds

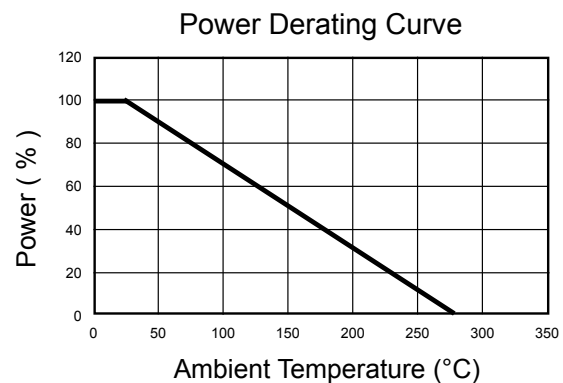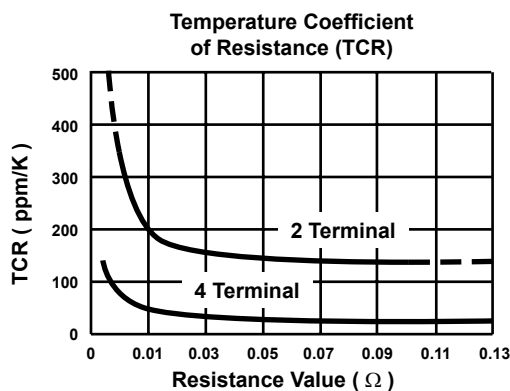

Ordering Information

Part Description: Part Type - Resistance - Tolerance - TCR (if not standard) - 4T (if desired)
 Example: MT-5 0.01 Ohm 1% 4T

MT Series


Low Ohm Power Resistors



SPECIFICATIONS (continued)

Type	Power Rating Watts @ 25°C	Dimensions				
		A ±0.020" [±0.5mm]	D ±0.020" [±0.5mm]	C ±0.020" [±0.5mm]	d ±0.002" [±0.05mm]	W (4T) ±0.010" [±0.3mm]
MT-1A	1	0.430 [10.9]	0.120 [3.0]	0.590 [15.0]	0.025 [0.6]	-
MT-2A	2	0.430 [10.9]	0.120 [3.0]	0.590 [15.0]	0.032 [0.8]	-
MT-2B	3	0.580 [14.7]	0.200 [5.1]	0.665 [16.9]	0.032 [0.8]	-
MT-2C	3	0.500 [12.7]	0.250 [6.4]	0.625 [15.9]	0.032 [0.8]	-
MT-3	4	0.600 [15.2]	0.250 [6.4]	0.675 [17.1]	0.032 [0.8]	0.125 [3.2]
MT-4	4.5	0.750 [19.1]	0.250 [6.4]	0.750 [19.1]	0.040 [1.0]	0.125 [3.2]
MT-5	5	0.890 [22.6]	0.335 [8.5]	0.820 [20.8]	0.040 [1.0]	0.125 [3.2]
MT-6	6	1.055 [26.8]	0.395 [10.0]	0.903 [22.9]	0.040 [1.0]	0.125 [3.2]
MT-10	10	1.755 [44.58]	0.355 [9.02]	1.338 [34.0]	0.040 [1.0]	0.125 [3.2]

Two Terminal

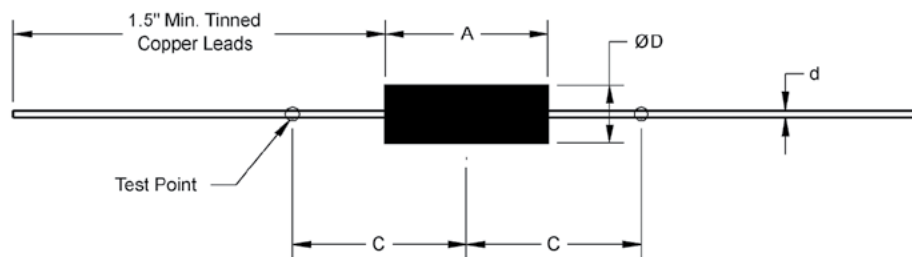

Terminal Strength: 10lb Pull Test

Four Terminal (4T)

