

Ultrafast Rectifier

MUR2020CT

FEATURES

- Ultrafast recovery time
- 175°C Operating temperature
- Popular TO-220 package
- Low forward voltage drop
- 100% avalanche tested
- Minimum Lot-to-Lot variations for robust device performance and reliable operation



APPLICATIONS

- Switching power supply
- Power switching circuits
- General purpose

Downloaded from Alldatasheet.com

ABSOLUTE MAXIMUM RATINGS(T<sub>a</sub>=25°C)

SYMBOL	PARAMETER	VALUE	UNIT
V <sub>RRM</sub> V <sub>RWM</sub> V <sub>R</sub>	Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	200	V
I <sub>F(AV)</sub>	Average Rectified Forward Current Per Leg Total device	10 20	A
I <sub>FSM</sub>	Nonrepetitive Peak Surge Current (Surge applied at rated load conditions half-wave, single phase, 60Hz)	100	A
P <sub>D</sub>	Maximum power dissipation	75	W
T <sub>J</sub>	Junction Temperature	-65~175	°C
T <sub>stg</sub>	Storage Temperature Range	-65~175	°C

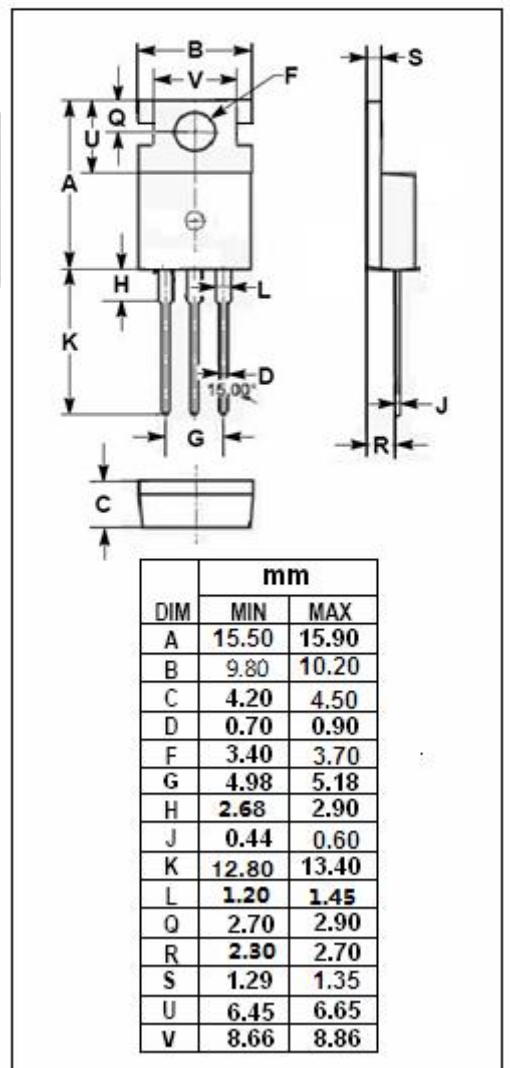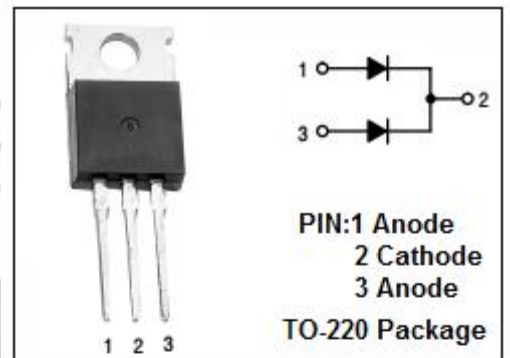

## Fast Recovery Rectifier

## MUR2020CT

## THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{thj-c}$	Thermal Resistance, Junction to Case	2.5	$^{\circ}\text{C}/\text{W}$

ELECTRICAL CHARACTERISTICS ( $T_a=25^{\circ}\text{C}$ ) (Pulse Test: Pulse Width=300  $\mu$  s, Duty Cycle  $\leq$  2%)

SYMBOL	PARAMETER	CONDITIONS	MAX	UNIT
$V_F$	Maximum Instantaneous Forward Voltage	$I_F=8\text{A}; T_j=125^{\circ}\text{C}$ $I_F=16\text{A}; T_j=25^{\circ}\text{C}$ $I_F=16\text{A}; T_j=125^{\circ}\text{C}$	0.85 1.15 1.05	V
$I_R$	Maximum Instantaneous Reverse Current	$V_R=V_{RWM}; T_j=150^{\circ}\text{C}$ $V_R=V_{RWM}$	250 15	$\mu$ A
$t_{rr}$	Maximum Reverse Recovery Time	$I_F=1\text{A}; di/dt=50\text{A}/\mu\text{s}$	35	ns

Downloaded from Alldatasheet.com