

DIGITRON SEMICONDUCTORS

MUR405-MUR460

4A SCHOTTKY RECTIFIER

MAXIMUM RATINGS

Rating	Symbol	MUR						Unit
		405	410	415	420	440	460	
Peak repetitive reverse voltage Working peak reverse voltage DC blocking voltage	V_{RRM} V_{RWM} V_R	50	100	150	200	400	600	V
Average rectified forward current (square wave) Mounting method per note 2	$I_{F(AV)}$	4.0 @ $T_A = 80^\circ\text{C}$			4.0 @ $T_A = 40^\circ\text{C}$			A
Non-repetitive peak surge current (surge applied at rated load conditions halfwave, single phase, 60Hz)	I_{FSM}	125			110			A
Operating and storage junction temperature range	T_J, T_{stg}	-65 to +175						$^\circ\text{C}$
Maximum thermal resistance Junction to ambient	$R_{\theta JA}$	Note 2						$^\circ\text{C}/\text{W}$


ELECTRICAL CHARACTERISTICS ($T_L = 25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	MUR						Unit
		405	410	415	420	440	460	
Maximum instantaneous forward voltage ⁽¹⁾ ($I_F = 3.0\text{A}, T_J = 150^\circ\text{C}$) ($I_F = 3.0\text{A}, T_J = 25^\circ\text{C}$) ($I_F = 4.0\text{A}, T_J = 25^\circ\text{C}$)	V_F		0.71 0.88 0.89			1.05 1.25 1.28		V
Maximum instantaneous reverse current ⁽¹⁾ (Rated dc voltage, $T_J = 150^\circ\text{C}$) (Rated dc voltage, $T_J = 25^\circ\text{C}$)	I_R		150 5			250 10		μA
Maximum reverse recovery time ($I_F = 1.0\text{A}, di/dt = 50\text{A}/\mu\text{s}$) ($I_F = 0.5\text{A}, I_R = 1.0\text{A}, I_{REC} = 0.25\text{A}$)	t_{rr}		35 25			75 50		ns
Maximum forward recovery time ($I_F = 1.0\text{A}, di/dt = 100\text{A}/\mu\text{s}, I_{REC}$ to 1.0V)	t_{fr}		25			50		ns
Controlled avalanche energy	W_{AVAL}		-		5	-		mJ

Note 1: Pulse test: Pulse width = 300 μs , duty cycle $\leq 2.0\%$.
Note 2: PC board with 1 1/2" x 1 1/2" copper surface.

MECHANICAL CHARACTERISTICS

Case	DO-201A
Marking	Body painted, alpha-numeric
Polarity	Cathode band

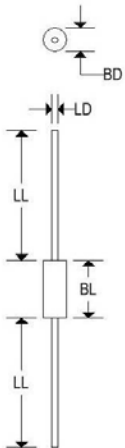

	DO-201A			
	Inches		Millimeters	
	Min	Max	Min	Max
BD	0.190	0.260	4.826	6.604
BL	0.285	0.375	7.240	9.530
LD	0.048	0.052	1.219	1.321
LL	1.000	-	25.400	-

DIGITRON SEMICONDUCTORS

MUR405-MUR460

10A SCHOTTKY RECTIFIER

MUR405, MUR410, MUR415, MUR420

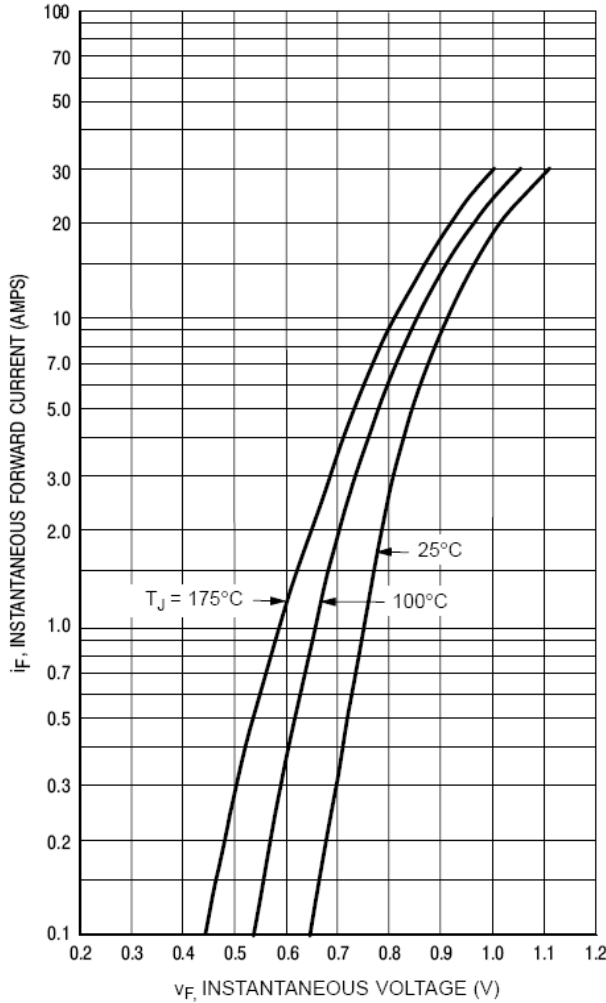


Figure 1. Typical Forward Voltage

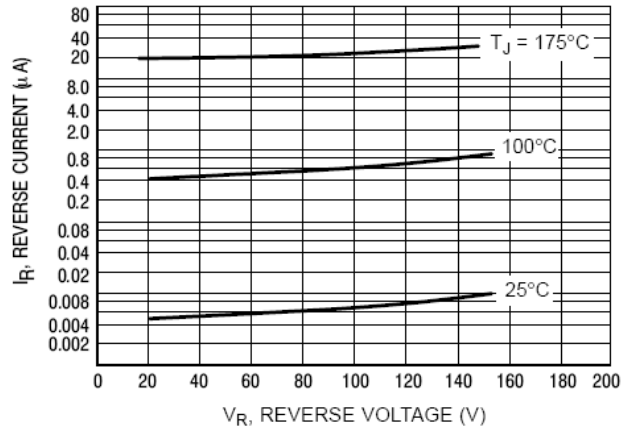


Figure 2. Typical Reverse Current

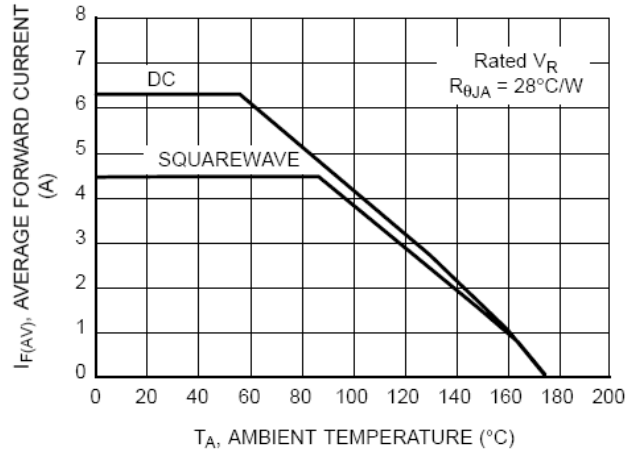


Figure 3. Current Derating
(Mounting Method #3 Per Note 2)

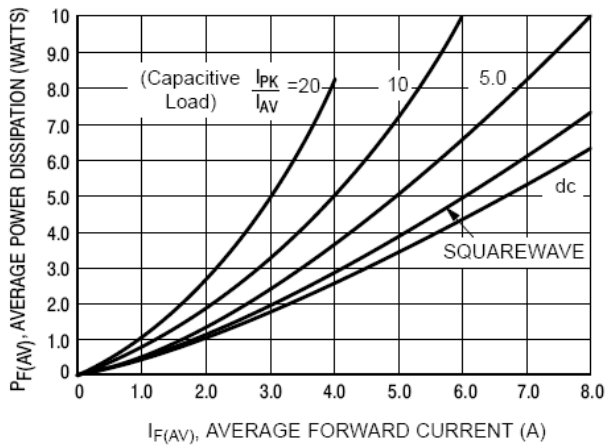


Figure 4. Power Dissipation

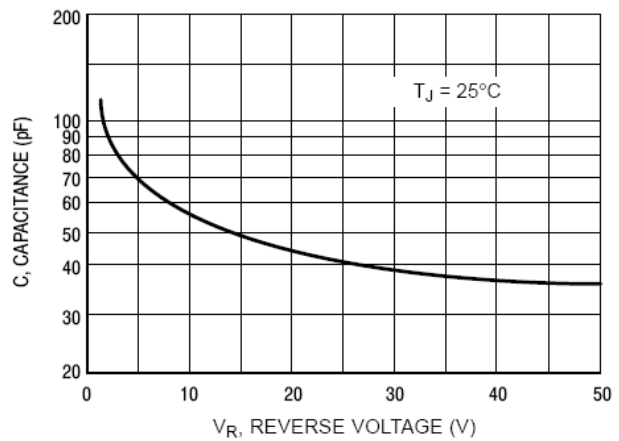


Figure 5. Typical Capacitance

DIGITRON SEMICONDUCTORS

MUR405-MUR460 10A SCHOTTKY RECTIFIER

MUR440, MUR460

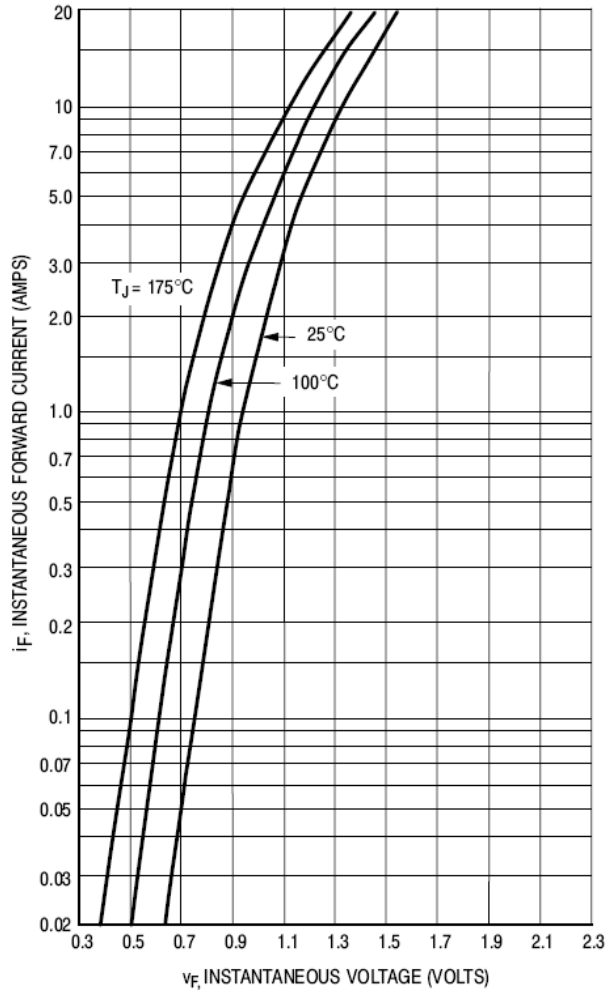


Figure 6. Typical Forward Voltage

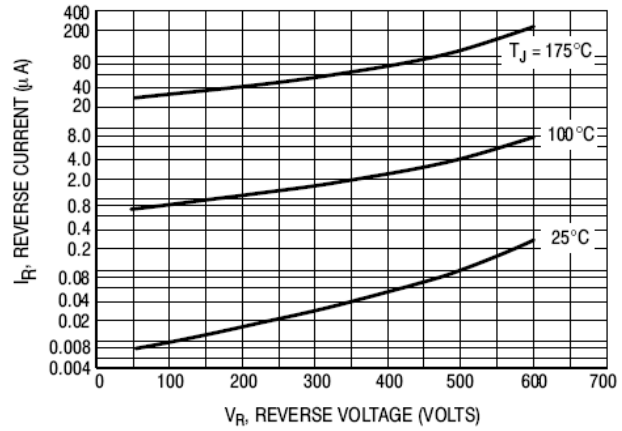
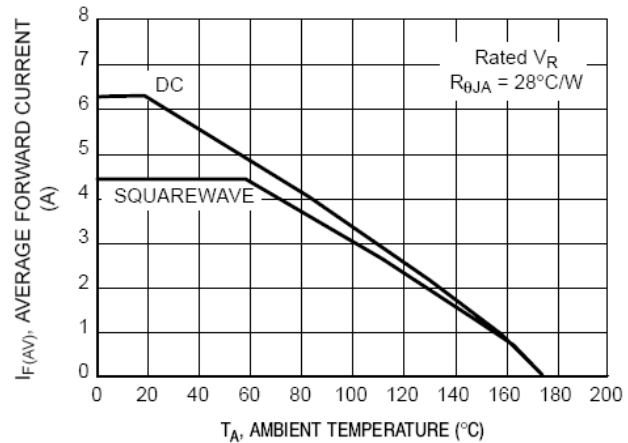


Figure 7. Typical Reverse Current



**Figure 8. Current Derating
(Mounting Method #3 Per Note 2)**

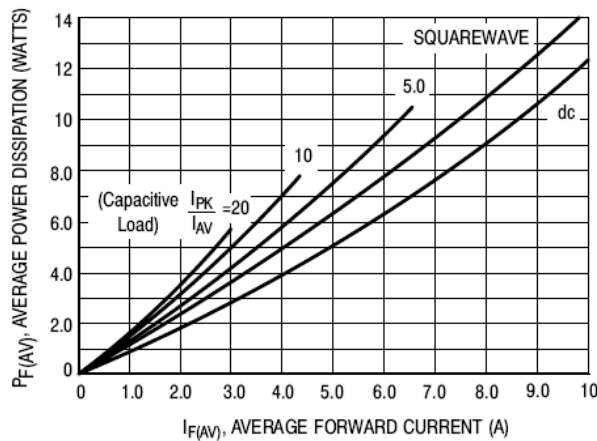


Figure 9. Power Dissipation

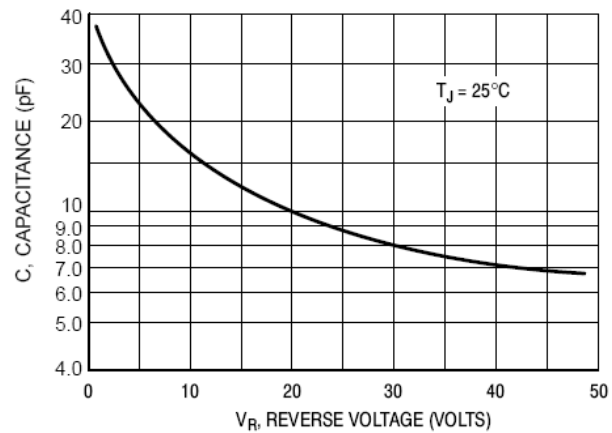


Figure 10. Typical Capacitance

Available Non-RoHS (standard) or RoHS compliant (add PBF suffix).
 Available as "HR" (high reliability) screened per MIL-PRF-19500, JANTX level. Add "HR" suffix to base part number.

144 Market Street
 Kenilworth NJ 07033 USA

phone +1.908.245-7200
 fax +1.908.245-0555

sales@digitroncorp.com
 www.digitroncorp.com