

# 18.5Watts Open Frame Dual Output Power Supply

## Model No.: NAD-03D

### Feature:

- 90 to 264Vac universal input range.
- UL, CSA, TUV safety meet.
- EMI/RFI meet VDE & FCC limit B.
- Low cost & compact size.
- 15Watts in 98.3×46×27mm Size.
- 2 Year Warranty.

### Specifications: typical at nominal line, full load at 25°C.

Input Specifications:	General Specifications:
<b>Input voltage:</b> 90 to 264Vac	<b>Efficiency:</b> 70% typical at full load
<b>Input Frequency:</b> 47 Hz to 63Hz	<b>Hold-up time:</b> 15ms @ 115Vac full load
<b>Input inrush current:</b> 20A at 115Vac 40A at 230Vac	<b>EMI/RFI:</b> VDE & FCC Class B limits
<b>Earth leakage:</b> 0.2mA max @ 115Vac 0.4mA max @ 230Vac	<b>Dielectric Withstand:</b> Input/output: 3000Vac Input/Ground: 1500Vac
<b>Output Specifications:</b>	<b>*Safety Meet:</b> UL UL60950 CSA C22.2 NO.60950 TUV EN60950
<b>Output Rating:</b> Vo1: +5V/1.5A Vo2: +12V/0.5A	
<b>Output Voltage Accuracy:</b> ± 5%max.	<b>Switching frequency:</b> 20kHz(reference)
<b>Line Regulation:</b> ± 1% max	<b>Weight:</b> 150g(5.3Oz)
<b>Load Regulation:</b> ± 3% max. (Full to half load)	<b>MTBF:</b> 100,000hours(MIL-HDBK-217F)
<b>Transient Response:</b> ± 1% max dev. (Full to half load) 500uS recovery	<b>Environmental Specifications:</b>
<b>Temperature Coefficient:</b> ± 0.04% /°C	<b>Operating temperature:</b> 0 to +50°C
<b>Ripple &amp; Noise:</b> 2% P-P max	<b>Storage temperature:</b> -20to +85°C
<b>Protections:</b> a. Over power protection b. Short circuit protection	<b>Humidity:</b> 5 to 95 % RH non-condensing
	<b>Vibration:</b> 2.4G , 5 to 500Hz
	<b>Cooling:</b> Free air convection


### Note:

1. Vibration test: Three orthogonal axes, random vibration, 10 minutes for each axis.
  2. Maximum output power is 18.5W.
  3. At least 20% of load is required to obtain stable regulation.
  4. Ripple & noise test method is measured at output terminal across a 0.1uF ceramic cap & a 10uF tantalum or electrolytic cap in parallel with a 20MHz bandwidth oscilloscope directly.
- ★ Please refer the safety meet status on appendix 1, For latest safety meet status  
Please consult YCL or visit" [www.ycl.com.tw](http://www.ycl.com.tw)"

# 18.5Watts Open Frame Dual Output Power Supply **YCL**

**Model No.: NAD-03D**

**Dimensions:** mm $\pm$  0.5mm

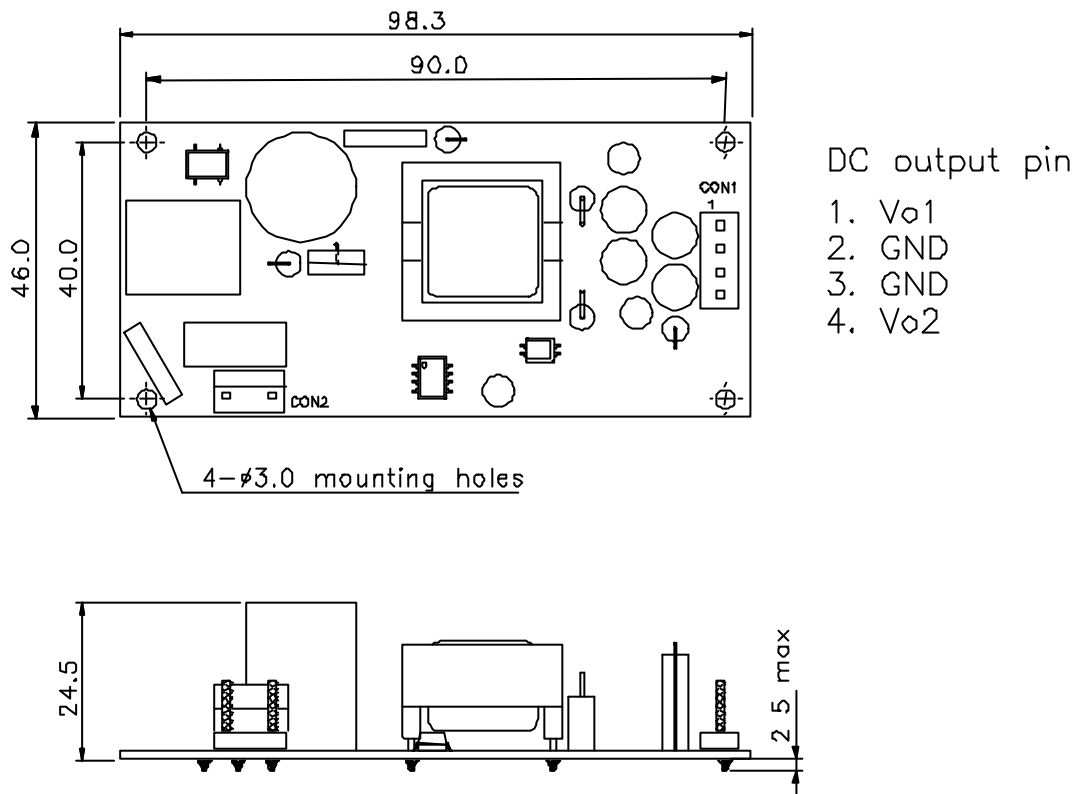

- AC mating connector is : Molex 5096-02C ,Ever 8673-03N2 or equivalent
- DC mating connector is : Molex 09-67-4041 ,Ever 8675-04 or equivalent