

## Model No.: NAD-20F3

### Feature:

- 90 to 264Vac universal input range.
- UL, TUV, CB Safety Approval.
- EMI/RFI meet VDE & FCC limit B.
- Low cost & compact size.
- 21.5 Watts in 109.85×52×32.5mm size.
- 2 year warranty.

### Specifications: typical at nominal line, full load at 25° C.


Input Specifications:	General Specifications:
<b>Input voltage:</b> 90 to 264Vac	<b>Efficiency:</b> 65% typical at full load
<b>Input Frequency:</b> 47 Hz to 63Hz	<b>Hold-up time:</b> 15ms @ 115Vac full load
<b>Input inrush current:</b> 30A at 115Vac 60A at 230Vac	<b>EMI/RFI:</b> VDE & FCC Class B limits
<b>Earth leakage:</b> 0.2mA max @ 115Vac 0.4mA max @ 230Vac	<b>Dielectric Withstand:</b> Input/output: 3000Vac Input/Ground: 1500Vac
<b>Output Specifications:</b>	* <b>Safety Approval:</b> UL UL60950 TUV EN60950 CB IEC950
<b>Output Rating:</b> Vo1: +5V/1A Vo2: 3.3V/5A	
<b>Output Voltage Accuracy :</b> ± 5% max.	
<b>Line Regulation:</b> ± 1% max.	<b>Switching frequency:</b> 30kHz(reference)
<b>Load Regulation:</b> 3.3V± 4%, 5V± 5% (Full to half load)	<b>Weight:</b> 140g
<b>Transient Response:</b> ± 1% max.dev. (Full to half load) 500uS recovery	<b>MTBF:</b> 100,000hours(MIL-HDBK-217F)
<b>Temperature Coefficient:</b> ± 0.04% /°C	<b>Environmental Specifications:</b>
<b>Ripple &amp; Noise:</b> 50mVp-p max.	<b>Operating temperature:</b> 0 to +50°C
<b>Protections:</b> a. Over voltage protection b. Over power protection c. Short circuit protection	<b>Storage temperature:</b> -20 to +85°C
	<b>Humidity:</b> 5 to 95 % RH non-condensing
	<b>Vibration:</b> 2.4G , 5 to 500Hz
	<b>Cooling:</b> Free air convection

### Note:

1. Vibration test: Three orthogonal axes, random vibration, 10 minutes for each axis.
  2. Maximum output power is 21.5W.
  3. At least 20% of load is required to obtain stable regulation.
  4. Ripple & noise test method is measured at output terminal across a 0.1uF ceramic cap & a 10uF tantalum or electrolytic cap in parallel with a 20MHz bandwidth oscilloscope directly.
- \* Please refer the safety approval status on appendix 1, For latest safety approval status Please consult YCL or visit" [www.ycl.com.tw](http://www.ycl.com.tw)"

**Model No.: NAD-20F3**

**Dimensions:** mm ± 0.5mm

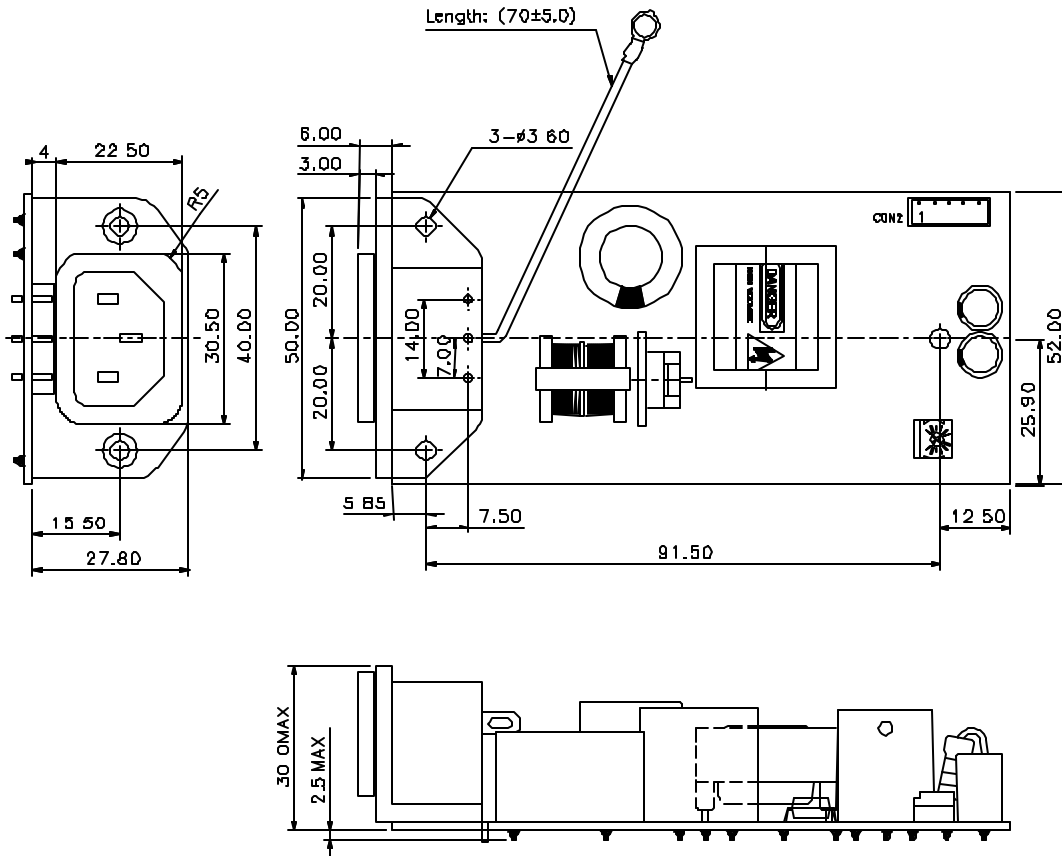

Pin	FUNCTION	Pin	FUNCTION
1	+5V	4	COM
2	+3.3V	5	COM
3	+3.3V		

- AC input socket : Super com SC-9R.Inalways 0714, Rongfeng SS-7B or equivalent.
- DC output mating connector is Molex 67280-0500, Ever 2532-05K or equivalent.