

# 60W Open Frame Dual Output NAD-601X series



## Feature:

- 90 to 264Vac universal input range.
- Meet(Approval) UL/CUL, TUV.
- EMI/RFI meet VDE & FCC limit B.
- Low cost & compact size.
- 60Watts in 127×76.2×36.5mm Size.
- 2 Year Warranty.

## Specifications: typical at nominal line, full load at 25 ° C.

Input Specifications:	General Specifications:
<b>Input voltage:</b> 90 to 264Vac	<b>Efficiency:</b> 70% typical at full load
<b>Input Frequency:</b> 47 Hz to 63Hz	<b>Hold-up time:</b> 15ms @ 115Vac full load
<b>Input inrush current:</b> 20A at 115Vac 40A at 230Vac	<b>EMI/RFI:</b> VDE & FCC Class B limits
<b>Earth leakage:</b> 0.2mA max @ 115Vac 0.4mA max @ 230Vac	<b>Dielectric Withstand:</b> Input/output: 3000Vac Input/Ground: 1500Vac
<b>Output Specifications:</b>	<b>*Safety Meet(Approval):</b> UL/CUL UL60950 TUV EN60950
<b>Output Rating:</b> See Selection table	
<b>Output Voltage Accuracy :</b> ± 5% max.	<b>Switching frequency:</b> 20kHz(reference)
<b>Line Regulation:</b> ± 1% max.	<b>Weight:</b> 350g
<b>Load Regulation:</b> ± 3% max. (Full to half load)	<b>MTBF:</b> 100,000hours(MIL-HDBK-217F)
<b>Transient Response:</b> ± 1% max.dev. (Full to half load) 500uS recovery	<b>Environmental Specifications:</b>
<b>Temperature Coefficient:</b> ± 0.04% / °C	<b>Operating temperature:</b> 0 to +50°C
<b>Ripple &amp; Noise:</b> 2% P-P max	<b>Storage temperature:</b> -20 to +85°C
<b>Protections:</b> a. Over voltage protection b. Over power protection c. Short circuit protection	<b>Humidity:</b> 5 to 95 % RH non-condensing
	<b>Vibration:</b> 2.4G , 5 to 500Hz
	<b>Cooling:</b> Free air convection

### Note:

1. Vibration test: Three orthogonal axes, random vibration, 10 minutes for each axis.
  2. Maximum output power is 60W.
  3. At least 20% of load is required to obtain stable regulation.
  4. Ripple & noise test method is measured at output terminal across a 0.1uF ceramic cap & a 10uF tantalum or electrolytic cap in parallel with a 20MHz bandwidth oscilloscope directly.
  5. Peak current less than 60 Sec. & output voltage can't be drawn out of window at same time.
- ★ Please refer the safety approval status on appendix 1, For latest safety approval status Please consult YCL or visit" [www.ycl.com.tw](http://www.ycl.com.tw)"

# 60W Open Frame Dual Output NAD-601X series




## Model Selection Table:

Model No.	Vo1		Vo2		Max. Power
	V/A	PEAK	V/A	PEAK	
NAD-6012	+5V/8A	10A	+12V/1.5A	2A	60W

Note:

1. Other output voltage versions available. Please Consult factory for details.

## Dimensions: mm $\pm$ 0.5mm

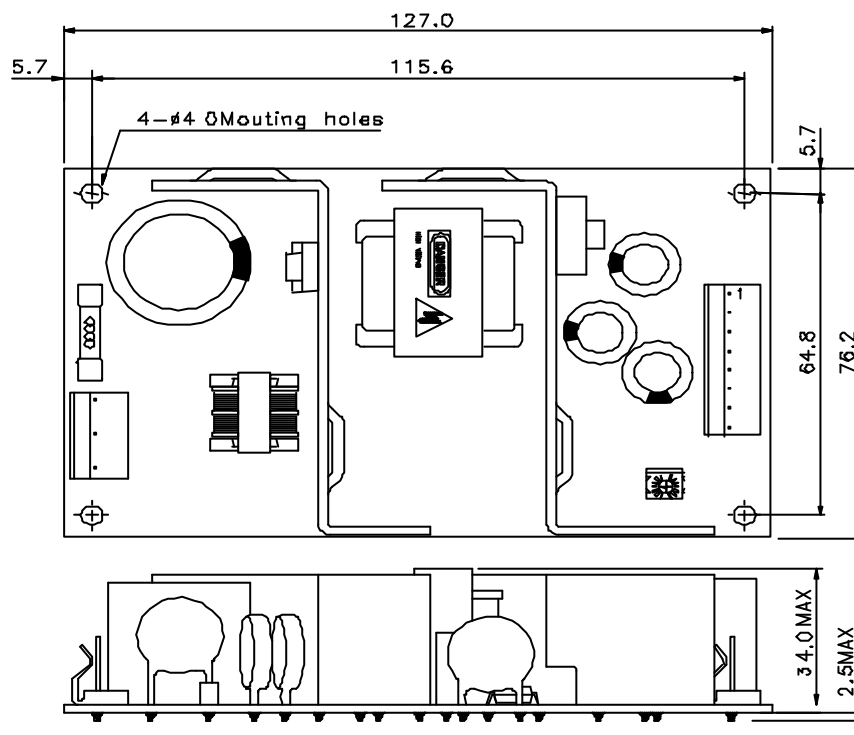

DC Output Pin Functions	
Pin 1	Vo2
Pin 2,3,4	Vo1
Pin 5,6,7,8	COM

- DC output mating connector is Molex 09-65-2088, Ever 8673-08 or equivalent.
- AC input mating connector is Molex 5096-03C, Ever 8673-05N2,4 or equivalent.