







Applications	Commercial Grade	
Feature	No Directivity Wire Wound Wire Wound Ferrite Core	
Series Type	NLCV25-PF	
Status	Production (Not Recommended for New Design) Recommended Alternate Part No. : NLCV25T-330K-EF	



Size		
Length(L)	2.50mm ±0.20mm	
Width(W)	2.00mm ±0.10mm	
Thickness(T)	1.80mm ±0.10mm	
Recommended Land Pattern (A)	1.00mm Nom.	
Recommended Land Pattern (B)	1.50mm Nom.	
Recommended Land Pattern (C)	1.50mm Nom.	

Electrical Characteristics		
Inductance	33μH ±10% at 2.52MHz	
Rated Current	120mA	
DC Resistance [Typ.]	4.2Ω	
DC Resistance [Max.]	5.46Ω	
Self Resonant Frequency [Min.]	16MHz	
Self Resonant Frequency [Typ.]		
Q [Min.]		
Q [Typ.]	30	

Other		
Operating Temp. Range (Including Self-Temp. Rise)	-40 to 105°C	
	Wave (Flow)	
Soldering Method	Reflow	
	Iron Soldering	
AEC-Q200	No	
Packing	Blister (Plastic)Taping [180mm Reel]	
Package Quantity	2000pcs	
Weight	0.025g	

[!] Images are for reference only and show exemplary products. ! This PDF document was created based on the data listed on the TDK Corporation website.


[!] All specifications are subject to change without notice.











Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

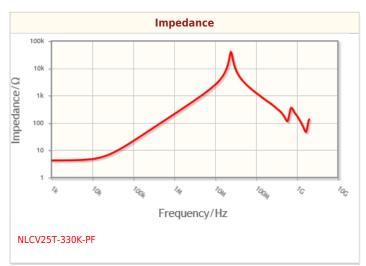


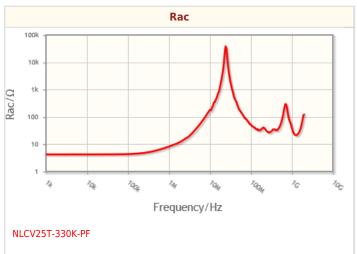

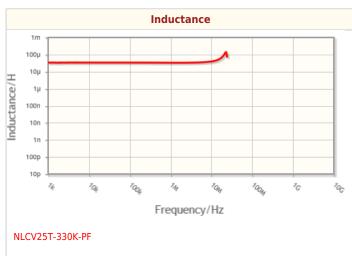

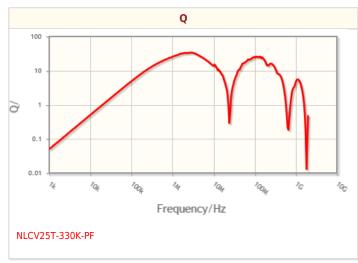

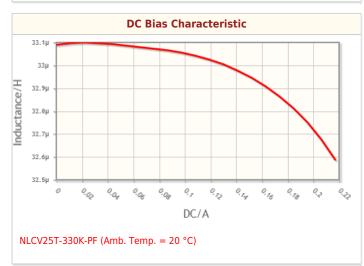

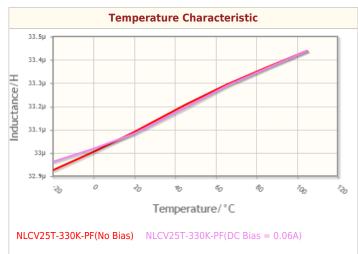

[!] Images are for reference only and show exemplary products.

[!] This PDF document was created based on the data listed on the TDK Corporation website.

[!] All specifications are subject to change without notice.










Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

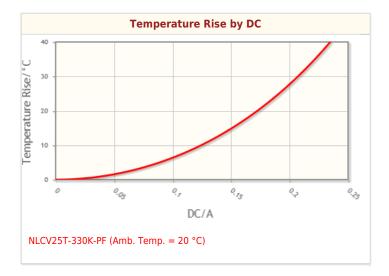

[!] Images are for reference only and show exemplary products.

[!] This PDF document was created based on the data listed on the TDK Corporation website.

[!] All specifications are subject to change without notice.












Associated Images



[!] Images are for reference only and show exemplary products. ! This PDF document was created based on the data listed on the TDK Corporation website.

[!] All specifications are subject to change without notice.