

Memory RGB controller

Specifications:

Supply voltage	DC12V
Output current	<2A(each channel)
Output	Three CMOS drain- open output
Working temperature	-20 ~ 60
Connecting Mode	Common anode
Size	L62*W35*H23mm
Product weight	40g

Direction for use :

Adopt button control method ,function of each button as below:

key: is the style/color function key, could choose different color changes, 12 changes in total.

This product has the memory function after power off

Adopt switch function control as follows :

Items	Patterns
1	Static red
2	Static blue
3	Static purple
4	Static green
5	Static yellow
6	Static cyan
7	Static white
8	Three-color jumpy changing
9	Seven-color jumpy changing
10	Three-color gradual changing
11	Seven-color gradual changing
12	Automatic circulation

Product Picture:



OSUBECF




OSUBECS




OSUBECW

Packing Dimensions:

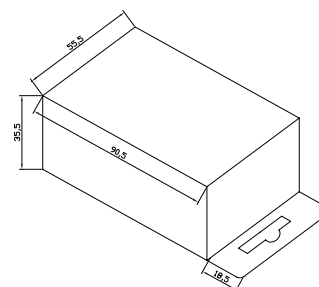


Model No.	OSUBECX
REV.	C1


Panel specification and connecting drawing as follows:

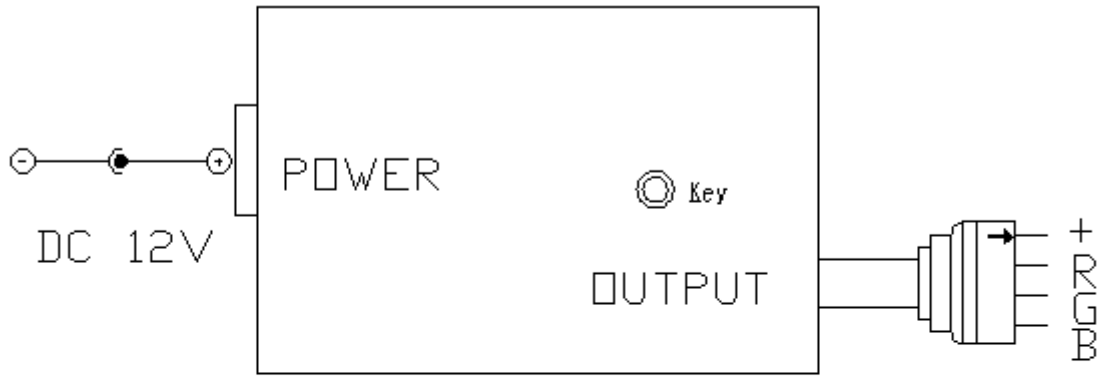

OSUBECF

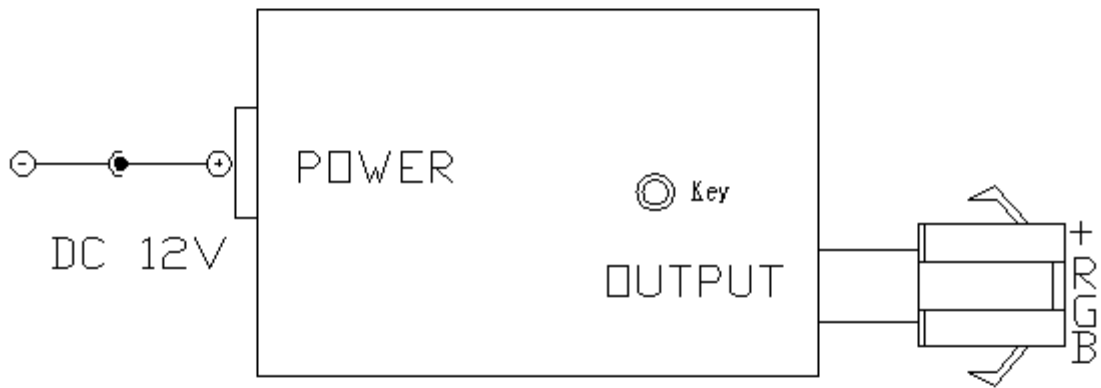

OSUBECS

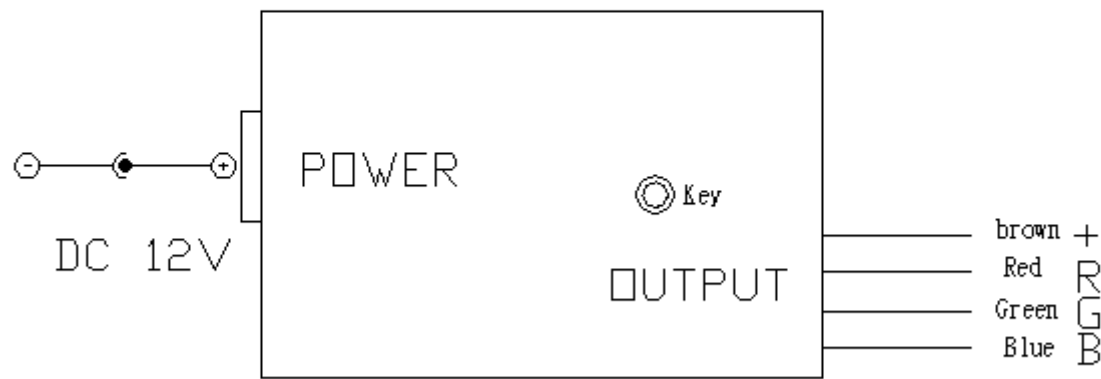

OSUBECW