

P4KE SERIES



400 WATT PEAK POWER TRANSIENT VOLTAGE SUPPRESSORS

FEATURES

- * 400 Watts Surge Capability at 1ms
- * Excellent clamping capability
- * Low zener impedance
- * Fast response time: Typically less than 1.0ps from 0 volt to BV min.
- * Typical I_k less than $1\mu A$ above 10V
- * High temperature soldering guaranteed: $260^\circ C$ / 10 seconds / .375"(9.5mm) lead length, 5lbs.(2.3kg) tension


MECHANICAL DATA

- * Case: Molded plastic
- * Epoxy: UL 94V-0 rate flame retardant
- * Lead: Axial leads, solderable per MIL-STD-202, method 208 guaranteed
- * Polarity: Color band denotes cathode end
- * Mounting position: Any

VOLTAGE RANGE

6.8 to 600 Volts

400 Watts Peak Power

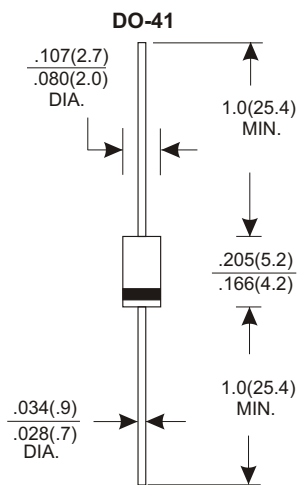

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating $25^\circ C$ ambient temperature unless otherwise specified.
Single phase half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

RATINGS	SYMBOL	VALUE	UNITS
Peak Power Dissipation at $T_A=25^\circ C$, $T_P=1ms$ (NOTE 1)	P_{PK}	Minimum 400	Watts
Power Dissipation on infinite heatsink at $T_L=75^\circ C$	P_D	1.0	Watt
Peak Forward Surge Current at 8.3ms Single Half Sine-Wave superimposed on rated load (JEDEC method) (NOTE 3)	I_{FSM}	40	Amps
Maximum Instantaneous Forward Voltage at 25.0A for Unidirectional only	V_F	3.5/5.0	Volts
Operating and Storage Temperature Range	T_J, T_{STG}	-55 to +150	$^\circ C$

NOTES:

1. Non-repetitive current pulse per Fig. 3 and derated above $T_A=25^\circ C$ per Fig. 2.
2. 8.3ms single half sine-wave, duty cycle = 4 pulses per minute maximum.
3. $V_F < 3.5V$ for devices of $V_{BR} < 200V$ and $V_F < 5.0V$ for devices of $V_{BR} > 201V$.

DEVICES FOR BIPOLAR APPLICATIONS

1. For Bidirectional use C or CA Suffix for types P4KE6.8 thru P4KE600.
2. Electrical characteristics apply in both directions.

RATING AND CHARACTERISTIC CURVES (P4KE SERIES)

FIG.1-PEAK PULSE POWER DERATING CURVE

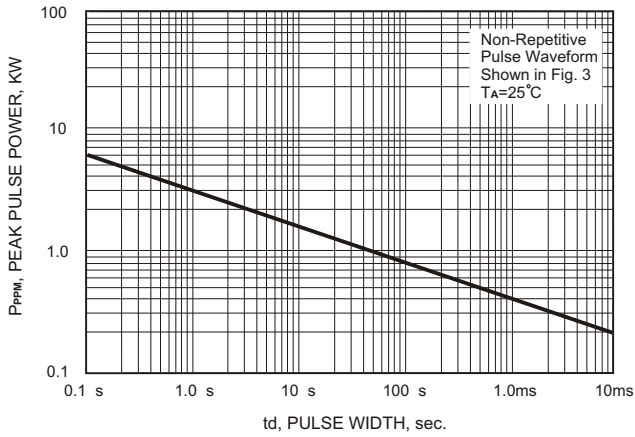


FIG.2-PULSE DERATING CURVE

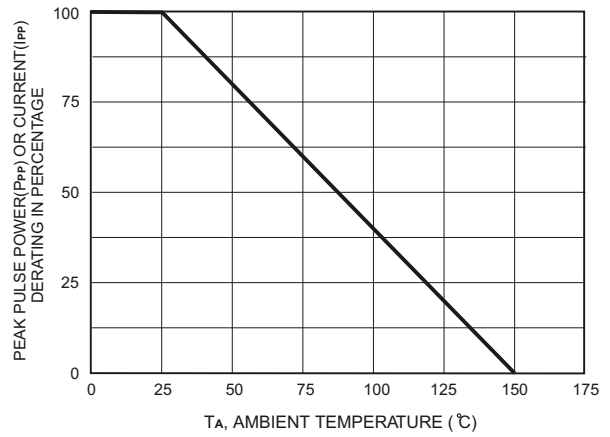


FIG.3-PULSE WAVE FORM

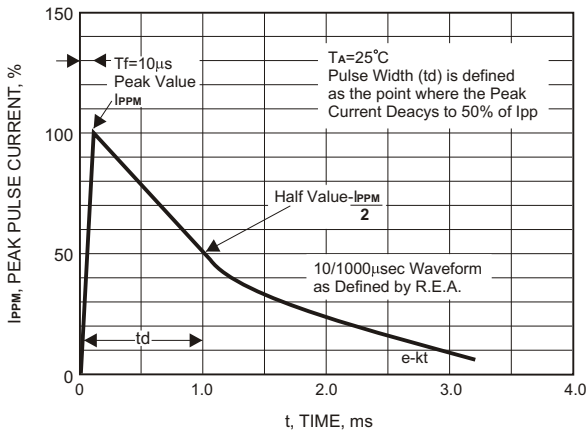


FIG.4-TYPICAL JUNCTION CAPACITANCE

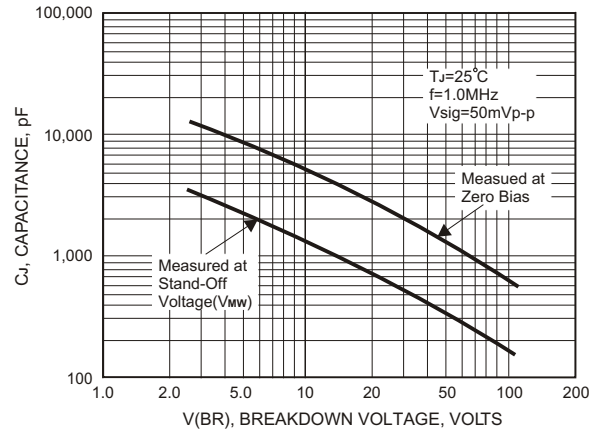


FIG.5-STEADY STATE POWER DERATING CURVE


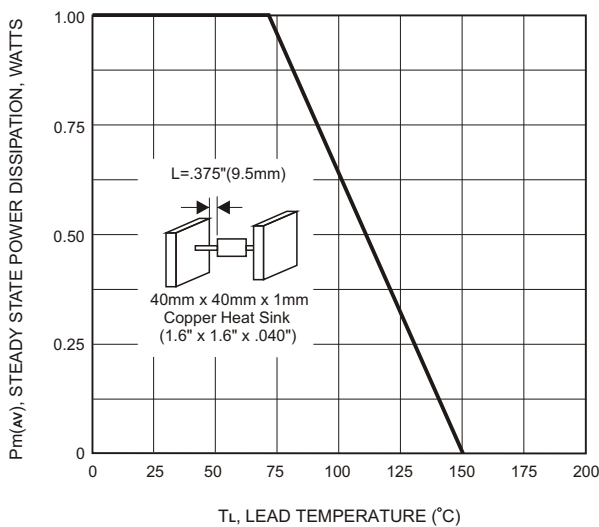


FIG.6-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT, UNIDIRECTIONAL



400 Watt Axial Lead TVS

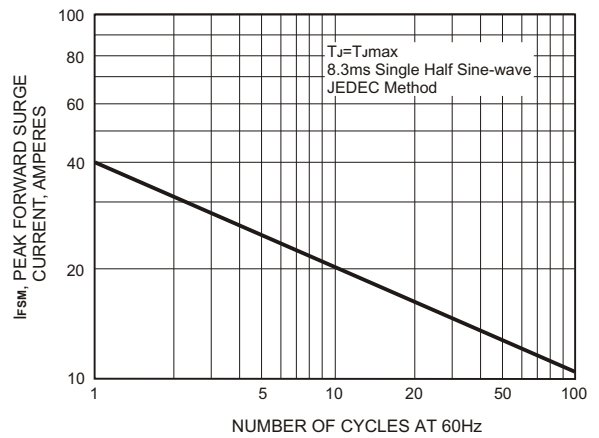

Part Number (Uni)	Part Number (Bi)	Reverse Standoff Voltage	Breakdown Voltage V_{BR} @ I_T			Maximum Reverse Leakage @ V_R	Maximum Peak Pulse Current	Maximum Clamping Voltage @ I_{pp}
			V_R (V)	Min (V)	Max (V)			
P4KE6.8	P4KE6.8C	5.5	6.12	7.48	10	1000	37.04	10.8
P4KE6.8A	P4KE6.8CA	5.8	6.45	7.14	10	1000	38.10	10.5
P4KE7.5	P4KE7.5C	6.1	6.75	8.25	10	500	34.19	11.7
P4KE7.5A	P4KE7.5CA	6.4	7.13	7.88	10	500	35.40	11.3
P4KE8.2	P4KE8.2C	6.6	7.38	9.02	10	200	32.00	12.5
P4KE8.2A	P4KE8.2CA	7.0	7.79	8.61	10	200	33.06	12.1
P4KE9.1	P4KE9.1C	7.4	8.19	10.01	1	50	28.99	13.8
P4KE9.1A	P4KE9.1CA	7.8	8.65	9.56	1	50	29.85	13.4
P4KE10	P4KE10C	8.1	9.00	11.00	1	10	26.67	15.0
P4KE10A	P4KE10CA	8.6	9.50	10.50	1	10	27.59	14.5
P4KE11	P4KE11C	8.9	9.90	12.10	1	5	24.69	16.2
P4KE11A	P4KE11CA	9.4	10.45	11.55	1	5	25.64	15.6
P4KE12	P4KE12C	9.7	10.80	13.20	1	5	23.12	17.3
P4KE12A	P4KE12CA	10.2	11.40	12.60	1	5	23.95	16.7
P4KE13	P4KE13C	10.5	11.70	14.30	1	5	21.05	19.0
P4KE13A	P4KE13CA	11.1	12.35	13.65	1	5	21.98	18.2
P4KE15	P4KE15C	12.1	13.50	16.50	1	5	18.18	22.0
P4KE15A	P4KE15CA	12.8	14.25	15.75	1	5	18.87	21.2
P4KE16	P4KE16C	12.9	14.40	17.60	1	5	17.02	23.5
P4KE16A	P4KE16CA	13.6	15.20	16.80	1	5	17.78	22.5
P4KE18	P4KE18C	14.5	16.20	19.80	1	5	15.09	26.5
P4KE18A	P4KE18CA	15.3	17.10	18.90	1	5	15.87	25.2
P4KE20	P4KE20C	16.2	18.00	22.00	1	5	13.75	29.1
P4KE20A	P4KE20CA	17.1	19.00	21.00	1	5	14.44	27.7
P4KE22	P4KE22C	17.8	19.80	24.20	1	5	12.54	31.9
P4KE22A	P4KE22CA	18.8	20.90	23.10	1	5	13.07	30.6
P4KE24	P4KE24C	19.4	21.60	26.40	1	5	11.53	34.7
P4KE24A	P4KE24CA	20.5	22.80	25.20	1	5	12.05	33.2
P4KE27	P4KE27C	21.8	24.30	29.70	1	5	10.23	39.1
P4KE27A	P4KE27CA	23.1	25.65	28.35	1	5	10.67	37.5
P4KE30	P4KE30C	24.3	27.00	33.00	1	5	9.20	43.5
P4KE30A	P4KE30CA	25.6	28.50	31.50	1	5	9.66	41.4
P4KE33	P4KE33C	26.8	29.70	36.30	1	5	8.39	47.7
P4KE33A	P4KE33CA	28.2	31.35	34.65	1	5	8.75	45.7
P4KE36	P4KE36C	29.1	32.40	39.60	1	5	7.69	52.0
P4KE36A	P4KE36CA	30.8	34.20	37.80	1	5	8.02	49.9
P4KE39	P4KE39C	31.6	35.10	42.90	1	5	7.09	56.4
P4KE39A	P4KE39CA	33.3	37.05	40.95	1	5	7.42	53.9
P4KE43	P4KE43C	34.8	38.70	47.30	1	5	6.46	61.9
P4KE43A	P4KE43CA	36.8	40.85	45.15	1	5	6.75	59.3
P4KE47	P4KE47C	38.1	42.30	51.70	1	5	5.90	67.8
P4KE47A	P4KE47CA	40.2	44.65	49.35	1	5	6.17	64.8
P4KE51	P4KE51C	41.3	45.90	56.10	1	5	5.44	73.5
P4KE51A	P4KE51CA	43.6	48.45	53.55	1	5	5.71	70.1
P4KE56	P4KE56C	45.4	50.40	61.60	1	5	4.97	80.5
P4KE56A	P4KE56CA	47.8	53.20	58.80	1	5	5.19	77.0
P4KE62	P4KE62C	50.2	55.80	68.20	1	5	4.49	89.0
P4KE62A	P4KE62CA	53.0	58.90	65.10	1	5	4.71	85.0

400 Watt Axial Lead TVS



Part Number (Uni)	Part Number (Bi)	Reverse Standoff Voltage	Breakdown Voltage V_{BR} @ I_T			Maximum Reverse Leakage @ VR	Maximum Peak Pulse Current	Maximum Clamping Voltage @ I_{pp}
			VR (V)	Min (V)	Max (V)			
P4KE68	P4KE68C	55.1	61.20	74.80	1	5	4.08	98.0
P4KE68A	P4KE68CA	58.1	64.60	71.40	1	5	4.35	92.0
P4KE75	P4KE75C	60.7	67.50	82.50	1	5	3.70	108.0
P4KE75A	P4KE75CA	64.1	71.25	78.75	1	5	3.88	103.0
P4KE82	P4KE82C	66.4	73.80	90.20	1	5	3.39	118.0
P4KE82A	P4KE82CA	70.1	77.90	86.10	1	5	3.54	113.0
P4KE91	P4KE91C	73.7	81.90	100.10	1	5	3.05	131.0
P4KE91A	P4KE91CA	77.8	86.45	95.55	1	5	3.20	125.0
P4KE100	P4KE100C	81.0	90.00	110.00	1	5	2.78	144.0
P4KE100A	P4KE100CA	85.5	95.00	105.00	1	5	2.92	137.0
P4KE110	P4KE110C	89.2	99.00	121.00	1	5	2.53	158.0
P4KE110A	P4KE110CA	94.0	104.50	115.50	1	5	2.63	152.0
P4KE120	P4KE120C	97.2	108.00	132.00	1	5	2.31	173.0
P4KE120A	P4KE120CA	102.0	114.00	126.00	1	5	2.42	165.0
P4KE130	P4KE130C	105.0	117.00	143.00	1	5	2.14	187.0
P4KE130A	P4KE130CA	111.0	123.50	136.50	1	5	2.23	179.0
P4KE150	P4KE150C	121.0	135.00	165.00	1	5	1.86	215.0
P4KE150A	P4KE150CA	128.0	142.50	157.50	1	5	1.93	207.0
P4KE160	P4KE160C	130.0	144.00	176.00	1	5	1.74	230.0
P4KE160A	P4KE160CA	136.0	152.00	168.00	1	5	1.83	219.0
P4KE170	P4KE170C	138.0	153.00	187.00	1	5	1.64	244.0
P4KE170A	P4KE170CA	145.0	161.50	178.50	1	5	1.71	234.0
P4KE180	P4KE180C	146.0	162.00	198.00	1	5	1.55	258.0
P4KE180A	P4KE180CA	154.0	171.00	189.00	1	5	1.63	246.0
P4KE200	P4KE200C	162.0	180.00	220.00	1	5	1.39	287.0
P4KE200A	P4KE200CA	171.0	190.00	210.00	1	5	1.46	274.0
P4KE220	P4KE220C	175.0	198.00	242.00	1	5	1.16	344.0
P4KE220A	P4KE220CA	185.0	209.00	231.00	1	5	1.22	328.0
P4KE250	P4KE250C	202.0	225.00	275.00	1	5	1.11	360.0
P4KE250A	P4KE250CA	214.0	237.50	262.50	1	5	1.16	344.0
P4KE300	P4KE300C	243.0	270.00	330.00	1	5	0.93	430.0
P4KE300A	P4KE300CA	256.0	285.00	315.00	1	5	0.97	414.0
P4KE350	P4KE350C	284.2	315.00	385.00	1	5	0.79	504.0
P4KE350A	P4KE350CA	299.3	332.50	367.50	1	5	0.83	482.0
P4KE380	P4KE380C	308.6	342.00	418.00	1	5	0.73	547.2
P4KE380A	P4KE380CA	324.9	361.00	399.00	1	5	0.76	524.4
P4KE400	P4KE400C	324.8	360.00	440.00	1	5	0.69	576.0
P4KE400A	P4KE400CA	342.0	380.00	420.00	1	5	0.72	552.0
P4KE440	P4KE440C	357.3	396.00	484.00	1	5	0.63	633.6
P4KE440A	P4KE440CA	376.2	418.00	462.00	1	5	0.66	607.2
P4KE500	P4KE500C	406.0	450.00	550.00	1	5	0.56	720.0
P4KE500A	P4KE500CA	427.5	475.00	525.00	1	5	0.58	690.0
P4KE520	P4KE520C	422.2	468.00	572.00	1	5	0.53	748.8
P4KE520A	P4KE520CA	444.6	494.00	546.00	1	5	0.56	717.6
P4KE550	P4KE550C	446.6	495.00	605.00	1	5	0.51	792.0
P4KE550A	P4KE550CA	470.3	522.50	577.50	1	5	0.53	759.0
P4KE600	P4KE600C	487.2	540.00	660.00	1	5	0.46	864.0
P4KE600A	P4KE600CA	513.0	570.00	630.00	1	5	0.48	828.0