

400W, 6.8V - 200V Surface Mount Transient Voltage Suppressor

FEATURES

- Low profile package
- Ideal for automated placement
- Glass passivated junction
- Built-in strain relief
- Excellent clamping capability
- Fast response time: Typically less than 1.0ps from 0 volt to BV min
- Typical I_R less than 1 μ A above 10V
- Compliant to RoHS Directive 2011/65/EU and in accordance to WEEE 2002/96/EC
- Halogen-free according to IEC 61249-2-21 definition



DO-214AC (SMA)

MECHANICAL DATA

Case: DO-214AC (SMA)

Molding compound, UL flammability classification rating 94V-0

Part No. with suffix "H" means AEC-Q101 qualified

Packing code with suffix "G" means green compound (halogen-free)

Moisture sensitivity level: level 1, per J-STD-020

Terminal: Matte tin plated leads, solderable per JESD22-B102

Meet JESD 201 class 2 whisker test

Polarity: Indicated by cathode band

Weight: 0.06 g (approximately)

| MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS ($T_A=25^\circ\text{C}$ unless otherwise noted) | | | |
|---|-----------|--------------|------------------|
| PARAMETER | SYMBOL | VALUE | UNIT |
| Peak power dissipation at $T_A=25^\circ\text{C}$, $T_p=1\text{ms}$ (Note 1) | P_{PK} | 400 | Watts |
| Peak forward surge current, 8.3 ms single half sine-wave superimposed on rated load | I_{FSM} | 40 | A |
| Maximum instantaneous forward voltage at 25 A for Unidirectional only | V_F | 3.5 | Volts |
| Operating junction temperature range | T_J | - 55 to +150 | $^\circ\text{C}$ |
| Storage temperature range | T_{STG} | - 55 to +150 | $^\circ\text{C}$ |

Note 1: Non-repetitive Current Pulse Per Fig. 3 and Derated above $T_A=25^\circ\text{C}$ Per Fig. 2

Devices for Bipolar Applications

1. For Bidirectional Use C or CA Suffix for Types P4SMA6.8 - Types P4SMA200A
2. Electrical Characteristics Apply in Both Directions

| ORDERING INFORMATION | | | | | |
|-----------------------|-----------------|--------------|---------------------|------------|--------------------------|
| PART NO. | PART NO. SUFFIX | PACKING CODE | PACKING CODE SUFFIX | PACKAGE | PACKING |
| P4SMAxxxx (Note 1) | H | R3 | G | SMA | 1,800 / 7" Plastic reel |
| | | R2 | | SMA | 7,500 / 13" Paper reel |
| | | M2 | | SMA | 7,500 / 13" Plastic reel |
| | | F3 | | Folded SMA | 1,800 / 7" Plastic reel |
| | | F2 | | Folded SMA | 7,500 / 13" Paper reel |
| | | F4 | | Folded SMA | 7,500 / 13" Plastic reel |

Note 1: "xxxx" defines voltage from 6.8V (P4SMA6.8) to 200V (P4SMA200A)

| EXAMPLE | | | | | |
|--------------------|-----------|-----------------|--------------|---------------------|--------------------------------------|
| PREFERRED PART NO. | PART NO. | PART NO. SUFFIX | PACKING CODE | PACKING CODE SUFFIX | DESCRIPTION |
| P4SMA200AHR3G | P4SMA200A | H | R3 | G | AEC-Q101 qualified Green compound |

RATINGS AND CHARACTERISTICS CURVES ($T_A=25^\circ\text{C}$ unless otherwise noted)

FIG. 1 PEAK PULSE POWER RATING CURVE

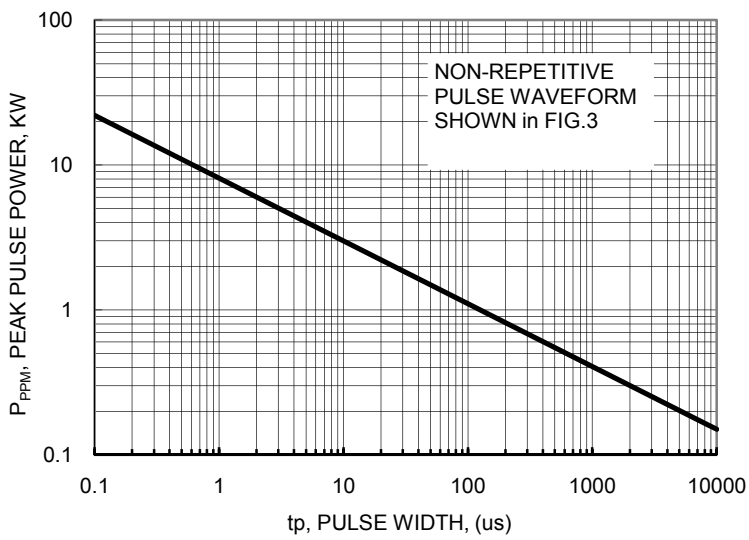


FIG.2 PULSE DERATING CURVE

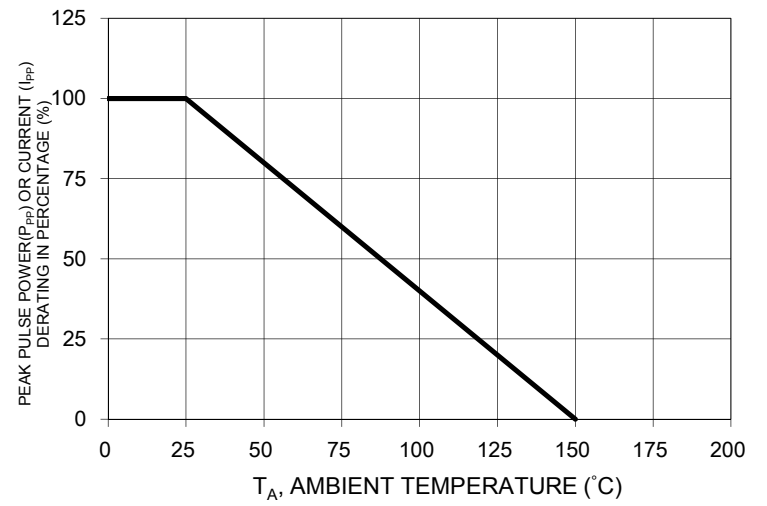


FIG. 3 CLAMPING POWER PULSE WAVEFORM

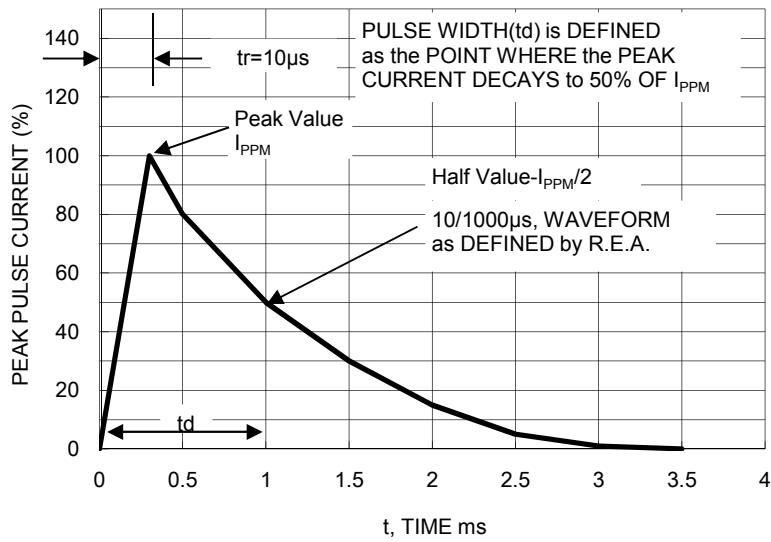


FIG. 4 MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT UNIDIRECTIONAL ONLY


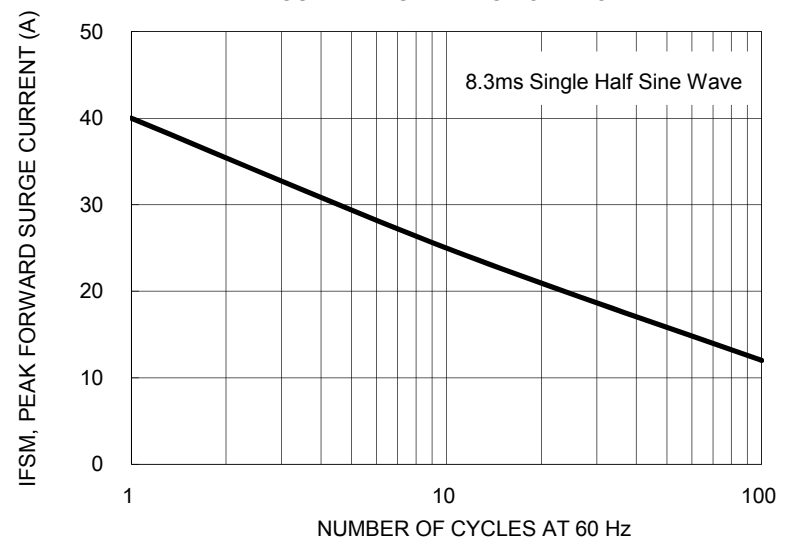


FIG. 5 TYPICAL JUNCTION CAPACITANCE

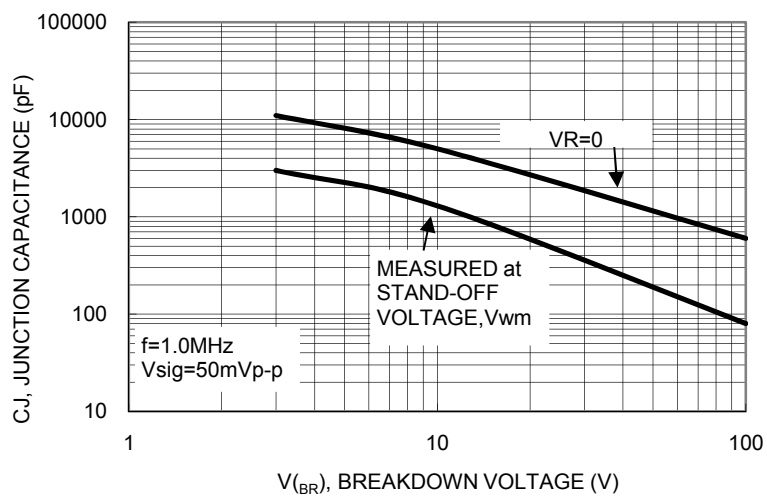

| Device | Device Marking Code | Breakdown Voltage V_{BR} (V) (Note 1) | | Test Current I_T (mA) | Stand-Off Voltage V_{WM} (V) | Maximum Reverse Leakage @ V_{WM} I_D (μ A) | Maximum Peak Pulse Current I_{PPM} (A) (Note 2) | Maximum Clamping Voltage @ I_{PPM} V_c (V) | Maximum Temperature Coefficient of V_{BR} (%/°C) |
|-----------|---------------------|--|-------|----------------------------|-----------------------------------|--|--|---|--|
| | | Min | Max | | | | | | |
| P4SMA6.8 | ADJ | 6.12 | 7.48 | 10 | 5.50 | 1000 | 38.0 | 10.8 | 0.057 |
| P4SMA6.8A | AEJ | 6.46 | 7.14 | 10 | 5.80 | 1000 | 40.0 | 10.5 | 0.057 |
| P4SMA7.5 | AFJ | 6.75 | 8.25 | 10 | 6.05 | 500 | 35.0 | 11.7 | 0.061 |
| P4SMA7.5A | AGJ | 7.13 | 7.88 | 10 | 6.40 | 500 | 37.0 | 11.3 | 0.061 |
| P4SMA8.2 | AHJ | 7.38 | 9.02 | 10 | 6.63 | 200 | 33.0 | 12.5 | 0.065 |
| P4SMA8.2A | AKJ | 7.79 | 8.61 | 10 | 7.02 | 200 | 34.0 | 12.1 | 0.065 |
| P4SMA9.1 | ALJ | 8.19 | 10.00 | 1.0 | 7.37 | 50 | 30.0 | 13.8 | 0.068 |
| P4SMA9.1A | AMJ | 8.65 | 9.55 | 1.0 | 7.78 | 50 | 31.0 | 13.4 | 0.068 |
| P4SMA10 | ANJ | 9.00 | 11.00 | 1.0 | 8.10 | 10 | 28.0 | 15.0 | 0.073 |
| P4SMA10A | APJ | 9.50 | 10.50 | 1.0 | 8.55 | 10 | 29.0 | 14.5 | 0.073 |
| P4SMA11 | AQJ | 9.90 | 12.10 | 1.0 | 8.92 | 1 | 26.0 | 16.2 | 0.075 |
| P4SMA11A | ARJ | 10.50 | 11.60 | 1.0 | 9.40 | 1 | 27.0 | 15.6 | 0.075 |
| P4SMA12 | ASJ | 10.80 | 13.20 | 1.0 | 9.72 | 1 | 24.0 | 17.3 | 0.078 |
| P4SMA12A | ATJ | 11.40 | 12.60 | 1.0 | 10.2 | 1 | 25.0 | 16.7 | 0.078 |
| P4SMA13 | AUJ | 11.70 | 14.30 | 1.0 | 10.5 | 1 | 22.0 | 19.0 | 0.081 |
| P4SMA13A | AVJ | 12.40 | 13.70 | 1.0 | 11.1 | 1 | 23.0 | 18.2 | 0.081 |
| P4SMA15 | AWJ | 13.50 | 16.50 | 1.0 | 12.1 | 1 | 19.0 | 22.0 | 0.084 |
| P4SMA15A | AXJ | 14.30 | 15.80 | 1.0 | 12.8 | 1 | 20.0 | 21.2 | 0.084 |
| P4SMA16 | AYJ | 14.40 | 17.60 | 1.0 | 12.9 | 1 | 17.8 | 23.5 | 0.086 |
| P4SMA16A | AZJ | 15.20 | 16.80 | 1.0 | 13.6 | 1 | 18.6 | 22.5 | 0.086 |
| P4SMA18 | BDJ | 16.20 | 19.80 | 1.0 | 14.5 | 1 | 16.0 | 26.5 | 0.088 |
| P4SMA18A | BEJ | 17.10 | 18.90 | 1.0 | 15.3 | 1 | 16.5 | 25.5 | 0.088 |
| P4SMA20 | BFJ | 18.00 | 22.00 | 1.0 | 16.2 | 1 | 14.0 | 29.1 | 0.090 |
| P4SMA20A | BGJ | 19.00 | 21.00 | 1.0 | 17.1 | 1 | 15.0 | 27.7 | 0.090 |
| P4SMA22 | BHJ | 19.80 | 24.20 | 1.0 | 17.8 | 1 | 13.0 | 31.9 | 0.092 |
| P4SMA22A | BKJ | 20.90 | 23.10 | 1.0 | 18.8 | 1 | 13.7 | 30.6 | 0.092 |
| P4SMA24 | BLJ | 21.60 | 26.40 | 1.0 | 19.4 | 1 | 12.0 | 34.7 | 0.094 |
| P4SMA24A | BMJ | 22.80 | 25.20 | 1.0 | 20.5 | 1 | 12.6 | 33.2 | 0.094 |
| P4SMA27 | BNJ | 24.30 | 29.70 | 1.0 | 21.8 | 1 | 10.7 | 39.1 | 0.096 |
| P4SMA27A | BPJ | 25.70 | 28.40 | 1.0 | 23.1 | 1 | 11.0 | 37.5 | 0.096 |
| P4SMA30 | BQJ | 27.00 | 33.00 | 1.0 | 24.3 | 1 | 9.6 | 43.5 | 0.097 |
| P4SMA30A | BRJ | 28.50 | 31.50 | 1.0 | 25.6 | 1 | 10.0 | 41.4 | 0.097 |
| P4SMA33 | BSJ | 29.70 | 36.30 | 1.0 | 26.8 | 1 | 8.8 | 47.7 | 0.098 |
| P4SMA33A | BTJ | 31.40 | 34.70 | 1.0 | 28.2 | 1 | 9.0 | 45.7 | 0.098 |
| P4SMA36 | BUJ | 32.40 | 39.60 | 1.0 | 29.1 | 1 | 8.0 | 52.0 | 0.099 |
| P4SMA36A | BVJ | 34.20 | 37.80 | 1.0 | 30.8 | 1 | 8.4 | 49.9 | 0.099 |
| P4SMA39 | BWJ | 35.10 | 42.90 | 1.0 | 31.6 | 1 | 7.4 | 56.4 | 0.100 |
| P4SMA39A | BXJ | 37.10 | 41.00 | 1.0 | 33.3 | 1 | 7.7 | 53.9 | 0.100 |
| P4SMA43 | BYJ | 38.70 | 47.30 | 1.0 | 34.8 | 1 | 6.7 | 61.9 | 0.101 |
| P4SMA43A | BZJ | 40.90 | 45.20 | 1.0 | 36.8 | 1 | 7.0 | 59.3 | 0.101 |
| P4SMA47 | CDJ | 42.30 | 51.70 | 1.0 | 38.1 | 1 | 6.2 | 67.8 | 0.101 |
| P4SMA47A | CEJ | 44.70 | 49.40 | 1.0 | 40.2 | 1 | 6.4 | 64.8 | 0.101 |
| P4SMA51 | CFJ | 45.90 | 56.10 | 1.0 | 41.3 | 1 | 5.7 | 73.5 | 0.102 |
| P4SMA51A | CGJ | 48.50 | 53.60 | 1.0 | 43.6 | 1 | 6.0 | 70.1 | 0.102 |
| P4SMA56 | CHJ | 50.40 | 61.60 | 1.0 | 45.4 | 1 | 5.2 | 80.5 | 0.103 |
| P4SMA56A | CKJ | 53.20 | 58.80 | 1.0 | 47.8 | 1 | 5.4 | 77.0 | 0.103 |



| Device | Device Marking Code | Breakdown Voltage V_{BR} (V) (Note 1) | | Test Current I_T (mA) | Stand-Off Voltage V_{WM} (V) | Maximum Reverse Leakage @ V_{WM} I_D (μ A) | Maximum Peak Pulse Current I_{PPM} (A) (Note 2) | Maximum Clamping Voltage @ I_{PPM} V_c (V) | Maximum Temperature Coefficient of V_{BR} (%/°C) |
|-----------|---------------------|--|------|----------------------------|-----------------------------------|--|--|---|--|
| | | Min | Max | | | | | | |
| P4SMA62 | CLJ | 55.8 | 68.2 | 1.0 | 50.2 | 1 | 4.7 | 89.0 | 0.104 |
| P4SMA62A | CMJ | 58.9 | 65.1 | 1.0 | 53.0 | 1 | 5.0 | 85.0 | 0.104 |
| P4SMA68 | CNJ | 61.2 | 74.8 | 1.0 | 55.1 | 1 | 4.2 | 98.0 | 0.104 |
| P4SMA68A | CPJ | 64.6 | 71.4 | 1.0 | 58.1 | 1 | 4.5 | 92.0 | 0.104 |
| P4SMA75 | CQJ | 67.5 | 82.5 | 1.0 | 60.7 | 1 | 3.8 | 108 | 0.105 |
| P4SMA75A | CRJ | 71.3 | 78.8 | 1.0 | 64.1 | 1 | 4.0 | 103 | 0.105 |
| P4SMA82 | CSJ | 73.8 | 90.2 | 1.0 | 66.4 | 1 | 3.5 | 118 | 0.105 |
| P4SMA82A | CTJ | 77.9 | 86.1 | 1.0 | 70.1 | 1 | 3.7 | 113 | 0.105 |
| P4SMA91 | CUJ | 81.9 | 100 | 1.0 | 73.7 | 1 | 3.2 | 131 | 0.106 |
| P4SMA91A | CVJ | 86.5 | 95.5 | 1.0 | 77.8 | 1 | 3.3 | 125 | 0.106 |
| P4SMA100 | CWJ | 90 | 110 | 1.0 | 81.0 | 1 | 2.9 | 144 | 0.106 |
| P4SMA100A | CXJ | 95 | 105 | 1.0 | 85.5 | 1 | 3.0 | 137 | 0.106 |
| P4SMA110 | CYJ | 99 | 121 | 1.0 | 89.2 | 1 | 2.6 | 158 | 0.107 |
| P4SMA110A | CZJ | 105 | 116 | 1.0 | 94.0 | 1 | 2.7 | 152 | 0.107 |
| P4SMA120 | RDJ | 108 | 132 | 1.0 | 97.2 | 1 | 2.4 | 173 | 0.107 |
| P4SMA120A | REJ | 114 | 126 | 1.0 | 102 | 1 | 2.5 | 165 | 0.107 |
| P4SMA130 | RFJ | 117 | 143 | 1.0 | 105 | 1 | 2.2 | 187 | 0.107 |
| P4SMA130A | RGJ | 124 | 137 | 1.0 | 111 | 1 | 2.3 | 179 | 0.107 |
| P4SMA150 | RHJ | 135 | 165 | 1.0 | 121 | 1 | 1.9 | 215 | 0.108 |
| P4SMA150A | RKJ | 143 | 158 | 1.0 | 128 | 1 | 2.0 | 207 | 0.108 |
| P4SMA160 | RLJ | 144 | 176 | 1.0 | 130 | 1 | 1.8 | 230 | 0.108 |
| P4SMA160A | RMJ | 152 | 168 | 1.0 | 136 | 1 | 1.9 | 219 | 0.108 |
| P4SMA170 | RNJ | 153 | 187 | 1.0 | 138 | 1 | 1.7 | 244 | 0.108 |
| P4SMA170A | RPJ | 162 | 179 | 1.0 | 145 | 1 | 1.8 | 234 | 0.108 |
| P4SMA180 | RQJ | 162 | 198 | 1.0 | 146 | 1 | 1.6 | 258 | 0.108 |
| P4SMA180A | RRJ | 171 | 189 | 1.0 | 154 | 1 | 1.7 | 246 | 0.108 |
| P4SMA200 | RSJ | 180 | 220 | 1.0 | 162 | 1 | 1.4 | 287 | 0.108 |
| P4SMA200A | RTJ | 190 | 210 | 1.0 | 171 | 1 | 1.51 | 274 | 0.108 |

Notes:

1. V_{BR} measure after I_T applied for 300us, I_T =square wave pulse or equivalent.
2. Surge current waveform per Figure. 3 and derate per Figure. 2.
3. For bipolar types having V_{WM} of 10 volts and under, the I_D limit is doubled.
4. For bidirectional use C or CA suffix for types PS4MA6.8 through P4SMA200A.
5. All terms and symbols are consistent with ANSI/IEEE C62.35.


PACKAGE OUTLINE DIMENSIONS

DO-214AC (SMA)

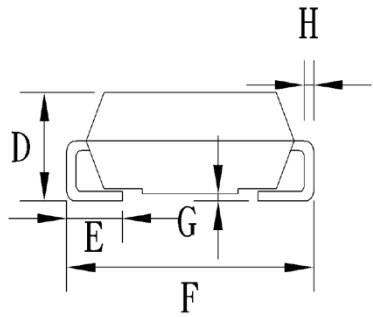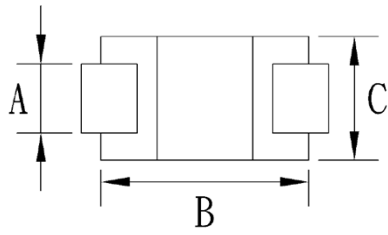

| DIM. | Unit (mm) | | Unit (inch) | |
|------|-----------|------|-------------|-------|
| | Min | Max | Min | Max |
| A | 1.27 | 1.58 | 0.050 | 0.062 |
| B | 4.06 | 4.60 | 0.160 | 0.181 |
| C | 2.29 | 2.83 | 0.090 | 0.111 |
| D | 1.99 | 2.50 | 0.078 | 0.098 |
| E | 0.90 | 1.41 | 0.035 | 0.056 |
| F | 4.95 | 5.33 | 0.195 | 0.210 |
| G | 0.10 | 0.20 | 0.004 | 0.008 |
| H | 0.15 | 0.31 | 0.006 | 0.012 |

SUGGESTED PAD LAYOUT

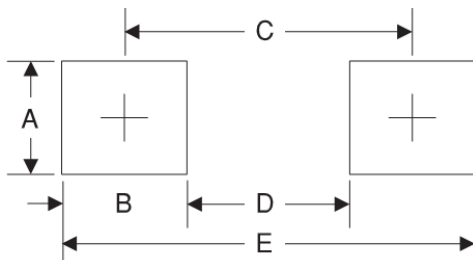

| Symbol | Unit (mm) | Unit (inch) |
|--------|-----------|-------------|
| A | 1.68 | 0.066 |
| B | 1.52 | 0.060 |
| C | 3.93 | 0.155 |
| D | 2.41 | 0.095 |
| E | 5.45 | 0.215 |

MARKING DIAGRAM



- P/N = Device Marking Code
- G = Green Compound
- YW = Date Code
- F = Factory Code

Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.