

**MA
SERIES**
P6BU-XXXXZ 1KV ISOLATED 1 W UNREGULATED DUAL OUTPUT DIP8
Available Inputs:
5, 12 and 24 VDC
Available Outputs:
(+ / -) 3.3, 5, 7.2, 12, 15 and 18 VDC

Other specifications please enquire.

Electrical Specifications

(Typical at + 25° C, nominal input voltage, rated output current unless otherwise specified)

Input Specifications

Voltage range

+/- 10 %

Filter

Capacitors

Isolation Specifications

Rated voltage

1000 VDC

Leakage current

1 mA

Resistance

 10⁹ Ohm

Capacitance

60 pF typ.

Output Specifications

Voltage accuracy

+/- 5 %, max.

Ripple and noise (at 20 MHz BW)

100 mV p-p, max.

Short circuit protection

Momentary

Line voltage regulation

+/- 1,2 % / 1,0 % of Vin

Load voltage regulation

+/- 8 %, load = 20 ~ 100 %

Temperature coefficient

+/- 0,02 % / °C

General Specifications

Efficiency

75 % to 85 %

Switching frequency

80 KHz, typ.

Environmental Specifications

Operating temperature (ambient)

- 40° C to + 85° C

Storage temperature

- 55 °C to + 125 °C

Derating

See graph

Humidity

Up to 90 %, non condensing

Cooling

Free air convection

Physical Characteristics

Dimensions DIP

12,7 X 10,16 x 6,85 mm

0,5 x 0,4 x 0,24 inches

Weight

1,8 g


Case material

Non conductive black plastic


Examples of Partnumbers

PART NO.	INPUT VOLTAGE (VDC)	INPUT CURRENT NO LOAD	INPUT CURRENT FULL LOAD	OUTPUT VOLTAGE (VDC)	OUTPUT CURRENT (max. mA)	EFFICIENCY FULL LOAD (% TYP.)
P6BU-0505Z	5	16	281	+/-5	+/-100	71
P6BU-0512Z	5	18	303	+/-12	+/-50	79
P6BU-0515Z	5	20	262	+/-15	+/-35	80
P6BU-1205Z	12	11	119	+/-5	+/-100	70
P6BU-1212Z	12	10	125	+/-12	+/-50	80
P6BU-2405Z	24	6	55	+/-5	+/-100	76
P6BU-2412Z	24	8	65	+/-12	+/-50	76
P6BU-2415Z	24	8	58	+/-15	+/-35	76

Dimensions

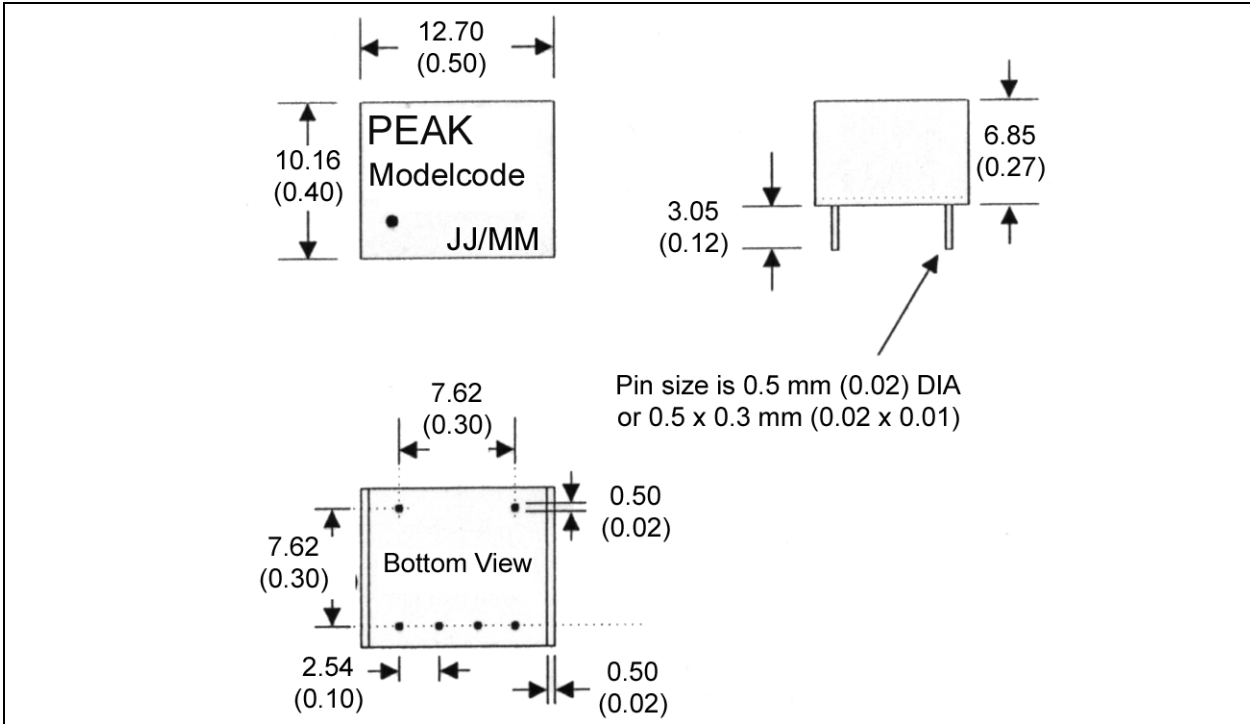

Derating Graph and Pinning

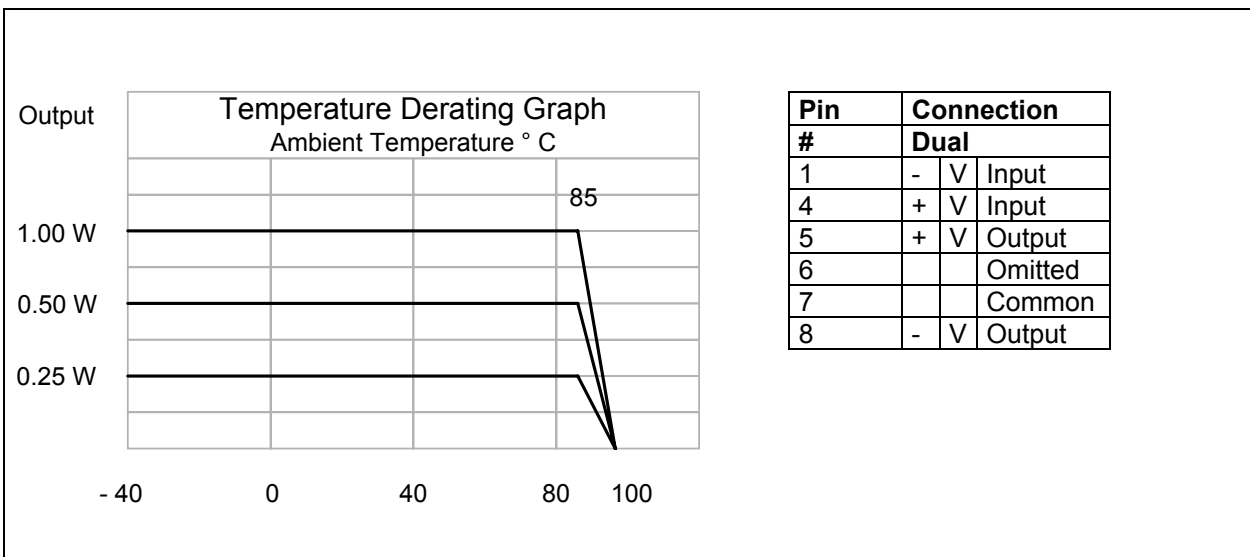

Specification can be changed without notice.

Copyright PEAK electronics GmbH