

**MA SERIES**
**P7BU-XXXXE 1KV ISOLATED 1.25 W UNREGULATED SINGLE OUTPUT DIP8**
**Available Inputs:**
**5, 12 and 24 VDC**
**Available Outputs:**
**3.3, 5, 7.2, 12, 15 and 18 VDC**

Other specifications please enquire.

**Electrical Specifications**

(Typical at + 25° C, nominal input voltage, rated output current unless otherwise specified)

**Input Specifications**

 Voltage range +/- 10 %  
 Filter Capacitors

**Isolation Specifications**

 Rated voltage 1000 VDC  
 Leakage current 1 mA  
 Resistance 10<sup>9</sup> Ohm  
 Capacitance 60 pF typ.

**Output Specifications**

 Voltage accuracy +/- 5 %, max.  
 Ripple and noise (at 20 MHz BW) 100 mV p-p, max.  
 Short circuit protection Momentary  
 Line voltage regulation +/- 1,2 % / 1,0 % of Vin  
 Load voltage regulation +/- 8 %, load = 20 ~ 100 %  
 Temperature coefficient +/- 0,02 % / °C

**General Specifications**

 Efficiency 70 % to 80 %  
 Switching frequency 80 KHz, typ.

**Environmental Specifications**

 Operating temperature (ambient) - 40° C to + 85° C  
 Storage temperature - 55 °C to + 125 °C  
 Derating See graph  
 Humidity Up to 90 %, non condensing  
 Cooling Free air convection


**Physical Characteristics**

 Dimensions DIP 12,70 x 10,16 x 6,85 mm  
 0,50 x 0,40 x 0,27 inches  
 Weight 1,8 g  
 Case material Non conductive black plastic


**Examples of Partnumbers**

PART NO.	INPUT VOLTAGE (VDC)	INPUT CURRENT NO LOAD	INPUT CURRENT FULL LOAD	OUTPUT VOLTAGE (VDC)	OUTPUT CURRENT (max. mA)	EFFICIENCY FULL LOAD (% TYP.)
P7BU-0505E	5	25	320.5	5	250	78
P7BU-0512E	5	25	320.5	12	104	78
P7BU-0515E	5	25	320.5	15	84	78
P7BU-1205E	12	16	133.5	5	250	78
P7BU-1212E	12	16	133.5	12	104	78
P7BU-1215E	12	16	133.5	15	84	78
P7BU-2405E	24	8	66.8	5	250	78
P7BU-2412E	24	8	66.8	12	104	78
P7BU-2415E	24	8	66.8	15	84	78
P7BU-2424E	24	8	69	24	52	78

**Dimensions**

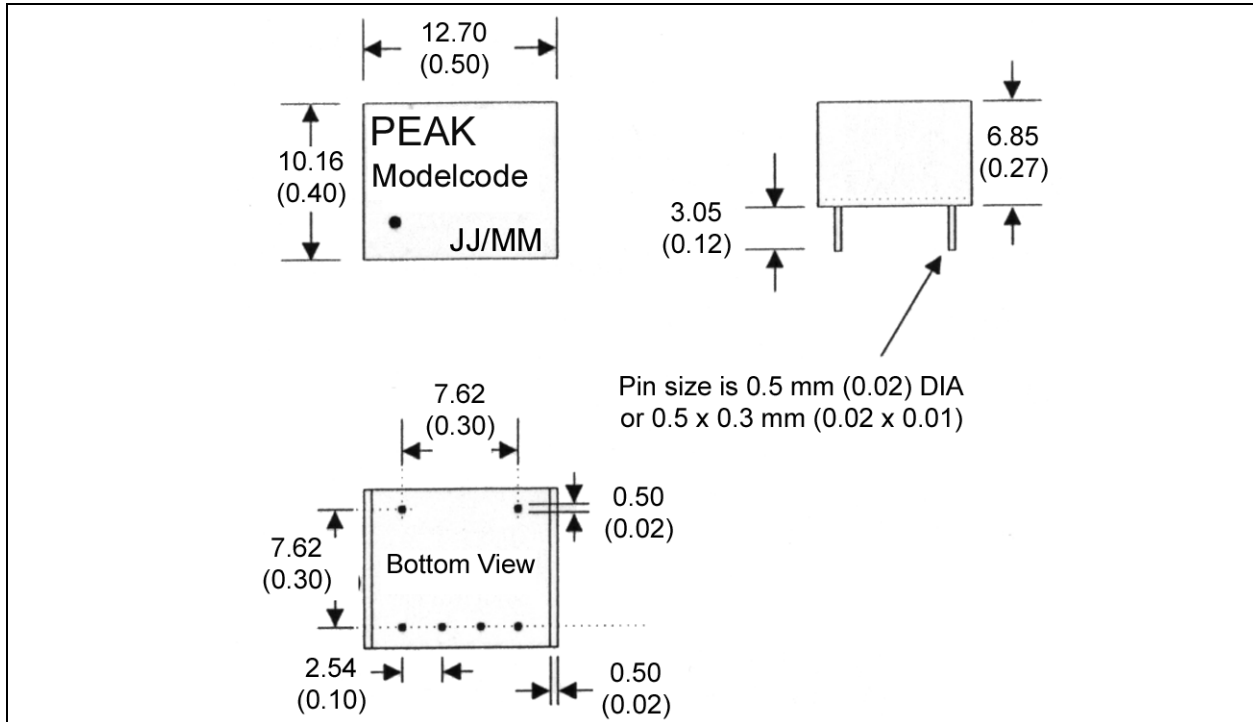

**Derating Graph and Pinning**

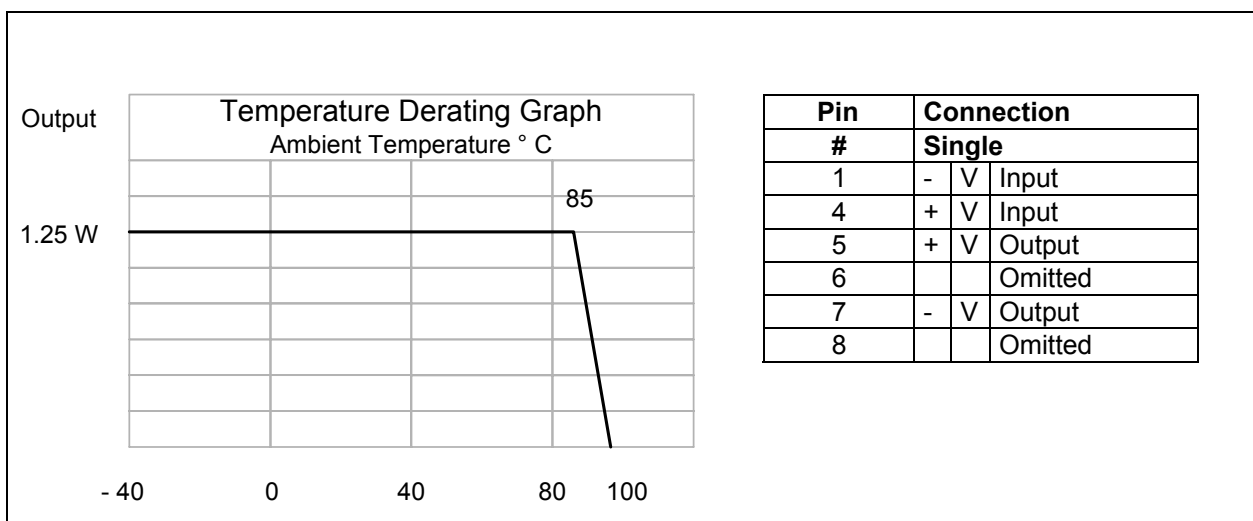

Specification can be changed without notice.

Copyright PEAK electronics GmbH