

**M5 SERIES P8SG-XXXXZH52M 5.2 KV ISOLATED 1.5 W REGULATED DUAL OUTPUT DIP24**
**Available Inputs:**
**5, 12 and 24 VDC**
**Available Outputs:**
**(+/-) 3.6, 5, 7.2, 12, 15 and 18 VDC**

Other specifications please enquire.

**Electrical Specifications**

(Typical at + 25° C, nominal input voltage, rated output current unless otherwise specified)

**Input Specifications**

 Voltage range +/- 10 %  
 Filter Pi Network

**Isolation Specifications**

 Rated voltage 5200 Vdc  
 Leakage current 1 mA  
 Resistance 10<sup>9</sup> Ohm  
 Capacitance 60 pF typ.

**Output Specifications**

 Voltage accuracy +/- 2 %, max.  
 Ripple and noise (at 20 MHz BW) 75 mV p-p, max.  
 Short circuit protection Continuous , restart automatic  
 Line voltage regulation +/- 0,5 % max.  
 Load voltage regulation +/- 0,5 % max.  
 Temperature coefficient +/- 0,02 % / °C

**General Specifications**

 Efficiency 65 % to 85 %  
 Switching frequency 125 KHz, typ.

**Environmental Specifications**

 Operating temperature (ambient) -25°C to +71°C  
 Storage temperature - 55 °C to + 125 °C  
 Derating See graph  
 Humidity Up to 90 %, non condensing  
 Cooling Free air convection


**Physical Characteristics**

 Dimensions 31,75 x 20,32 x 10,16 mm  
 1,25 x 0,80 x 0,40 inches  
 Weight 14,5 g  
 Case material Nickel Coated Copper

**Examples of Partnumbers/Modelcode**

PART NO.	INPUT VOLTAGE (VDC) Nominal	INPUT CURRENT NO LOAD	INPUT CURRENT FULL LOAD	OUTPUT VOLTAGE (VDC)	OUTPUT CURRENT (max. mA)	EFFICIENCY FULL LOAD (% TYP.)
P8SG-053R6ZH52M	5	78	443	+/- 3,6	+/- 200	65
P8SG-0505ZH52M	5	75	454	+/- 5	+/- 150	66
P8SG-1205ZH52M	12	70	184	+/- 5	+/- 150	68
P8SG-1212ZH52M	12	67	181	+/- 12	+/- 63	69
P8SG-2405ZH52M	24	32	96	+/- 5	+/- 150	65
P8SG-247R2ZH52M	24	29	91	+/- 7.2	+/- 100	66
P8SG-2415ZH52M	24	26	91	+/- 15	+/- 50	69

**Dimensions**

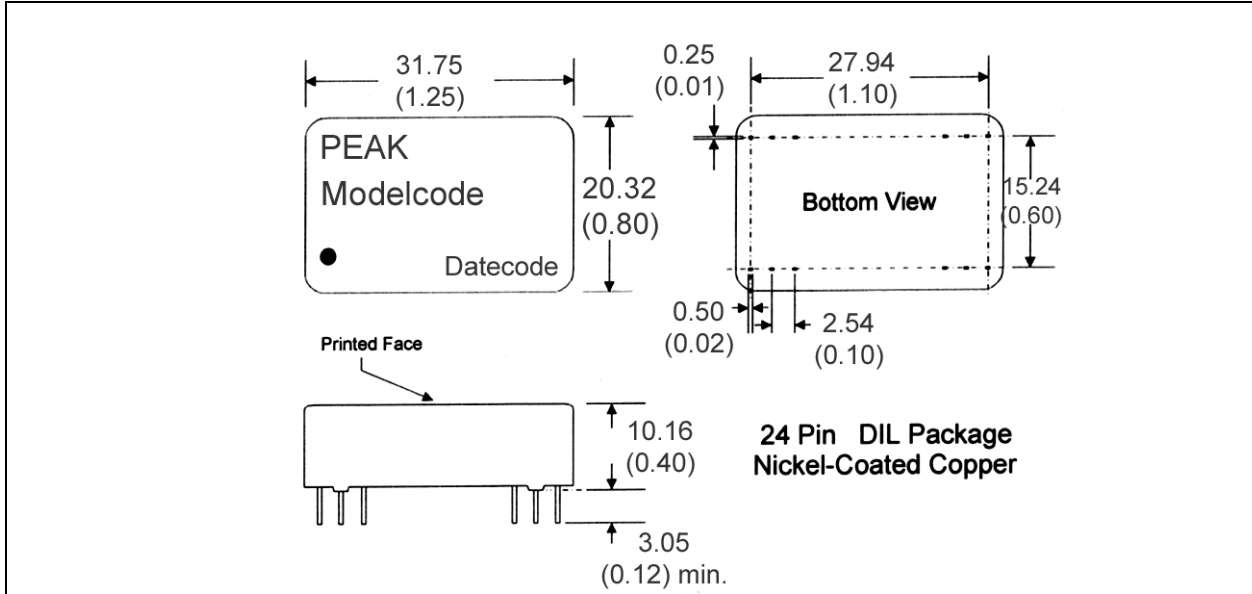

**Derating Graph and Pinning**

