



40 WATT DC TO DC CONVERTERS

DESCRIPTION

The PD40 series of DC/DC converters provide up to 40 watts of continuous output power. Available in three standard input ranges of 10-30 VDC, 20-60 VDC and 30-90 VDC, they are ideal for a variety of applications including telecoms, process control, portable equipment and vehicle mounted instrumentation. All units are available in compact "open PCB" or "enclosed" mechanical formats.

FEATURES

- Low cost
- Small size, light weight
- 100% burn-in
- Overvoltage protection
- Overcurrent protection
- Three wide input ranges:
10-30 VDC, 20-60 VDC and 30-90 VDC

INPUT SPECIFICATIONS

Input voltage : 10 to 30 VDC (PD40 "L" series)
20 to 60 VDC (PD40 "M" series)
30 to 90 VDC (PD40 "H" series)

Input current : 2.5A (rms) for 24 VDC
1.3A (rms) for 48 VDC
0.84A (rms) for 72 VDC

OUTPUT SPECIFICATIONS

Output voltage/current : See rating chart

Total output power : 40 watts maximum

Ripple and noise : 1% peak to peak max.


Overvoltage protection : set at 112 - 132% of its nominal output voltage

Overcurrent protection : All outputs protected to short circuit conditions

Temperature coefficient : All outputs $\pm 0.04\%$ / $^{\circ}\text{C}$ maximum

Transient response : Maximum excursion of 4% or better on all models, recovering to 1% of final value within 500us after a 25% step load change

PD40 SERIES

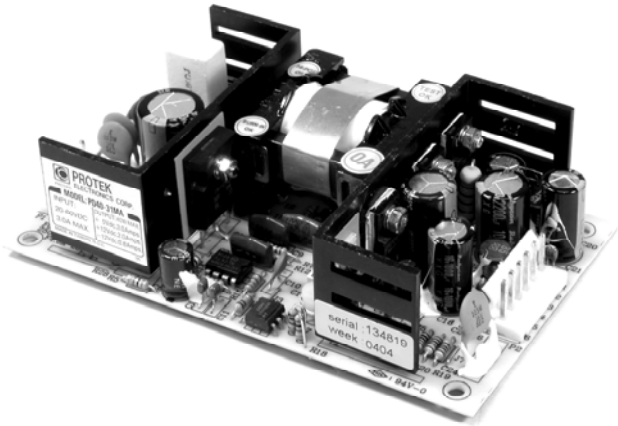

ENVIRONMENTAL SPECIFICATIONS

Operating temperature : 0 $^{\circ}\text{C}$ to +70 $^{\circ}\text{C}$
Storage temperature : -40 $^{\circ}\text{C}$ to +85 $^{\circ}\text{C}$
Relative humidity : 5% to 95% non-condensing
Derating : Derate from 100% at +50 $^{\circ}\text{C}$ linearly to 50% at +70 $^{\circ}\text{C}$

GENERAL SPECIFICATIONS

Switching frequency : 36KHz ± 5 KHz

Efficiency : 70% minimum at full load

Line regulation : $\pm 0.5\%$ maximum at full load

Withstand voltage : 1000VDC from input to output


MTBF : 600,000 hours minimum at full load at 25 $^{\circ}\text{C}$ ambient, calculated per MIL-HDBK-217F

OUTPUT VOLTAGE/CURRENT RATING CHART

(1)(2) Model	Output #1				Output #2				Output #3				Maximum Output Power(3)
	Vnom.	Imin.	Imax.	Tol.	Vnom.	Imin.	Imax.	Tol.	Vnom.	Imin.	Imax.	Tol.	
PD40-10	5V	0A	8.0A	2%									40W
PD40-12	12V	0A	3.5A	1%	(N/A)					(N/A)			40W
PD40-13	15V	0A	3.0A	1%	(N/A)					(N/A)			40W
PD40-14	24V	0A	2.0A	1%	(N/A)					(N/A)			40W
PD40-23	+5V	0.5A	3.0A	3%	+12V	0.2A	2A	5%		(N/A)			40W
PD40-24	+5V	0.5A	3.0A	3%	+15V	0.2A	2A	5%		(N/A)			40W
PD40-25	+5V	0.5A	3.0A	3%	+24V	0.1A	1A	5%		(N/A)			40W
PD40-30	+5V	0.5A	3.0A	3%	+12V	0.2A	2A	5%	-5V	0A	0.8A	5%	40W
PD40-31	+5V	0.5A	3.0A	3%	+12V	0.2A	2A	5%	-12V	0A	0.8A	5%	40W
PD40-32	+5V	0.5A	3.0A	3%	+15V	0.2A	2A	5%	-15V	0A	0.8A	5%	40W
PD40-33	+5V	0.5A	3.0A	3%	+15V	0.2A	2A	5%	-12V	0A	0.8A	5%	40W
PD40-39	+5V	0.5A	3.0A	3%	+24V	0.1A	1A	5%	-12V	0A	0.8A	5%	40W

- Notes: (1) All multi-output units may be operated at no-load without damage. At no-load, output tolerance increases to 10%.
 (2) Suffix codes for mechanical format and input range are as follows. PD40-XXYZ; "XX" is the model code from the above table, "Y" is the input range (L=10-30 VDC, M=20-60 VDC, H=30-90 VDC) and "Z" is the mechanical format (A=open PCB, B=L-bracket, C=enclosed), e.g. PD40-31MC (20-60 VDC input range, enclosed).
 (3) "L" series is suitable only for 75% of the above stated maximum output power.

MECHANICAL SPECIFICATIONS

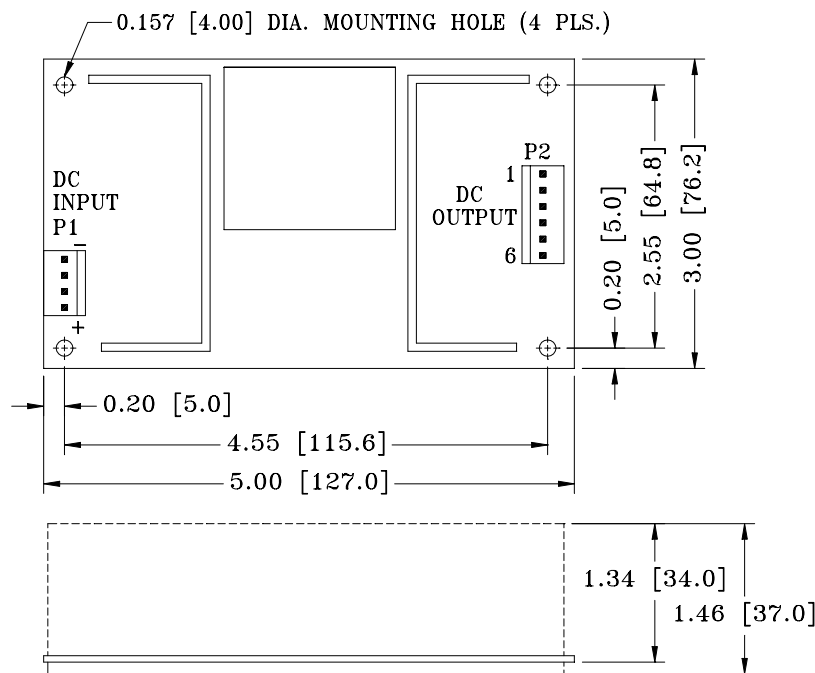

NOTES:

- Dimensions shown in inch [mm]
- Tolerance 0.02 [0.5] maximum
- Input connector mates with Molex housing 09-50-3041 and Molex 2878 series crimp terminal.
- Output connector mates with Molex housing 09-50-3061 and Molex 2878 series crimp terminal.
- Weight: 220 grams approx. (PCB format)
- See the mechanical details of L-bracket and enclosed formats in page 7-1.

PIN CHART


MODEL	PIN	1	2	3	4	5	6
		PD40-10 PD40-12 PD40-13 PD40-14	OUTPUT #1	OUTPUT #1	OUTPUT #1	RETURN	RETURN
PD40-23 PD40-24 PD40-25	OUTPUT #2	OUTPUT #1	OUTPUT #1	COMMON RETURN	COMMON RETURN	N.C.	
PD40-30 PD40-31 PD40-32 PD40-33 PD40-39	OUTPUT #2	OUTPUT #1	OUTPUT #1	COMMON RETURN	COMMON RETURN	OUTPUT #3	

L-Bracket and Enclosed Formats of PU30SL, PU40SL, PM40AL and PD40 series

Unit: inch [mm]

Tolerance: 0.02 [0.5]

SERIES: PU30SL

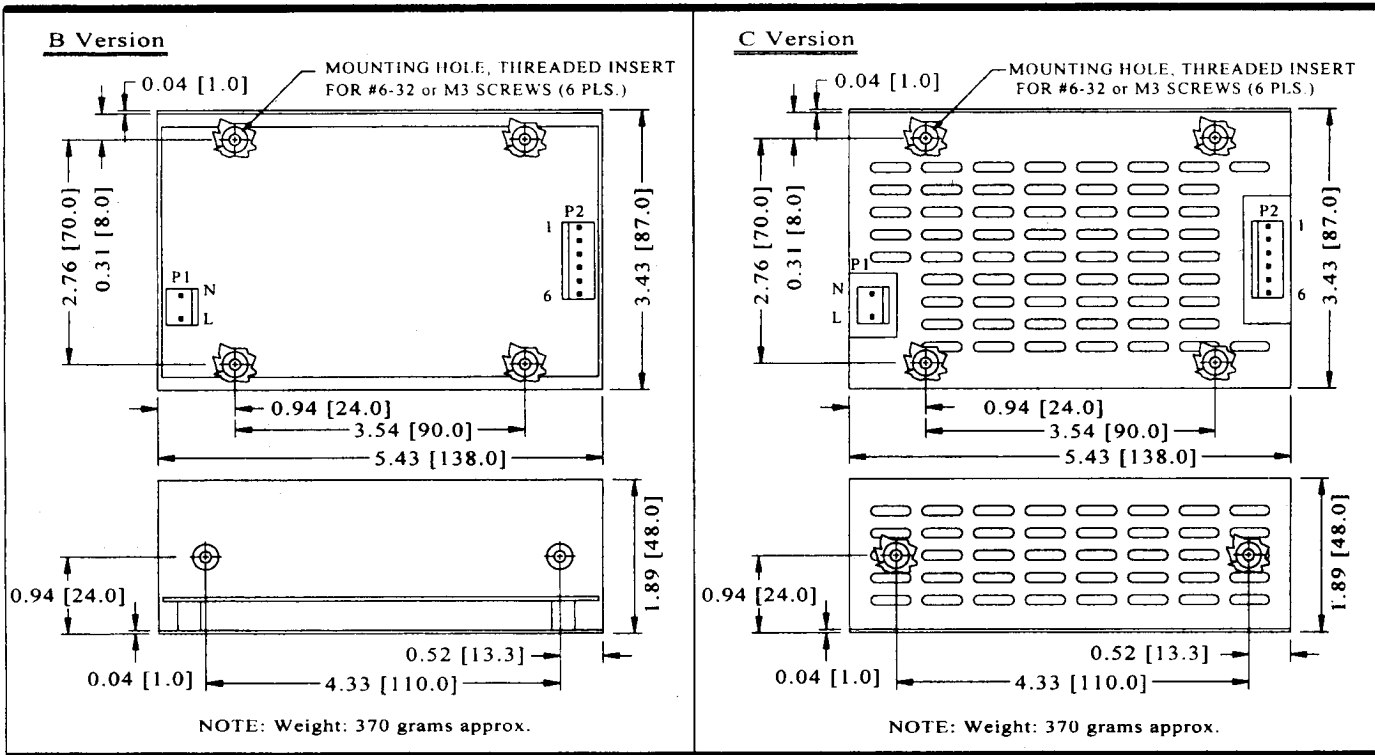

SERIES: PU40SL/PM40AL/PD40

