





PRODUCT SUMMARY

$V_{(BR)DSS}$	$R_{DS(ON)}$	I_D
40V	8mΩ	60A



- 1. GATE
- 2. DRAIN
- 3. SOURCE

ABSOLUTE MAXIMUM RATINGS ($T_A = 25\text{ °C}$ Unless Otherwise Noted)

PARAMETERS/TEST CONDITIONS		SYMBOL	LIMITS	UNITS
Drain-Source Voltage		V_{DS}	40	V
Gate-Source Voltage		V_{GS}	±20	V
Continuous Drain Current ²	$T_C = 25\text{ °C}$	I_D	60	A
	$T_C = 100\text{ °C}$		38	
Pulsed Drain Current ¹		I_{DM}	110	
Avalanche Current		I_{AS}	30.5	
Avalanche Energy	$L = 0.1\text{mH}$	E_{AS}	46.7	mJ
Power Dissipation	$T_C = 25\text{ °C}$	P_D	62	W
	$T_C = 100\text{ °C}$		25	
Junction & Storage Temperature Range		T_J, T_{stg}	-55 to 150	°C

THERMAL RESISTANCE RATINGS

THERMAL RESISTANCE	SYMBOL	TYPICAL	MAXIMUM	UNITS
Junction-to-Case	$R_{\theta JC}$		2	°C / W
Junction-to-Ambient	$R_{\theta JA}$		62.5	

¹Pulse width limited by maximum junction temperature.

²Package limitation current is 39A

ELECTRICAL CHARACTERISTICS ($T_J = 25\text{ °C}$, Unless Otherwise Noted)

PARAMETER	SYMBOL	TEST CONDITIONS	LIMITS			UNIT
			MIN	TYP	MAX	
STATIC						
Drain-Source Breakdown Voltage	$V_{(BR)DSS}$	$V_{GS} = 0V, I_D = 250\mu A$	40			V
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = 250\mu A$	1.3	1.6	2.3	
Gate-Body Leakage	I_{GSS}	$V_{DS} = 0V, V_{GS} = \pm 20V$			±100	nA
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS} = 32V, V_{GS} = 0V$			1	μA
		$V_{DS} = 30V, V_{GS} = 0V, T_J = 125\text{ °C}$			10	
Drain-Source On-State Resistance ¹	$R_{DS(ON)}$	$V_{GS} = 4.5V, I_D = 16A$		6.3	12	mΩ
		$V_{GS} = 10V, I_D = 20A$		5.5	8	


Forward Transconductance ¹	g_{fs}	$V_{DS} = 5V, I_D = 20A$		80		S
DYNAMIC						
Input Capacitance	C_{iss}	$V_{GS} = 0V, V_{DS} = 20V, f = 1MHz$		1704		pF
Output Capacitance	C_{oss}			216		
Reverse Transfer Capacitance	C_{rss}			131		
Gate Resistance	R_g	$V_{GS} = 0V, V_{DS} = 0V, f = 1MHz$		1.3		Ω
Total Gate Charge ²	$Q_{g(VGS=10V)}$	$V_{DS} = 20V, I_D = 20A$		34		nC
	$Q_{g(VGS=4.5V)}$			18		
Gate-Source Charge ²	Q_{gs}			4.5		
Gate-Drain Charge ²	Q_{gd}			8.4		
Turn-On Delay Time ²	$t_{d(on)}$		$V_{DS} = 20V$ $I_D \cong 20A, V_{GS} = 10V, R_{GEN} = 6\Omega$		17	
Rise Time ²	t_r			11.5		
Turn-Off Delay Time ²	$t_{d(off)}$			55		
Fall Time ²	t_f			10		
SOURCE-DRAIN DIODE RATINGS AND CHARACTERISTICS ($T_J = 25^\circ C$)						
Continuous Current ³	I_S			47		A
Forward Voltage ¹	V_{SD}	$I_F = 20A, V_{GS} = 0V$		1.3		V
Reverse Recovery Time	t_{rr}	$I_F = 20A, di_F/dt = 100A / \mu S$		19.5		nS
Reverse Recovery Charge	Q_{rr}			9.3		nC

¹Pulse test : Pulse Width $\leq 300 \mu sec$, Duty Cycle $\leq 2\%$.


²Independent of operating temperature.

³Package limitation current is 39A


Output Characteristics

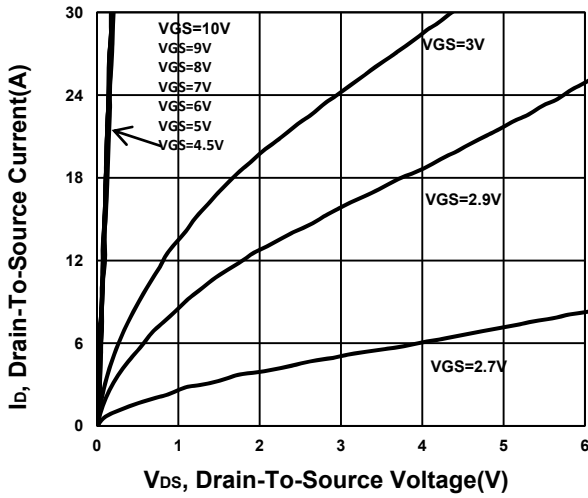


Transfer Characteristics

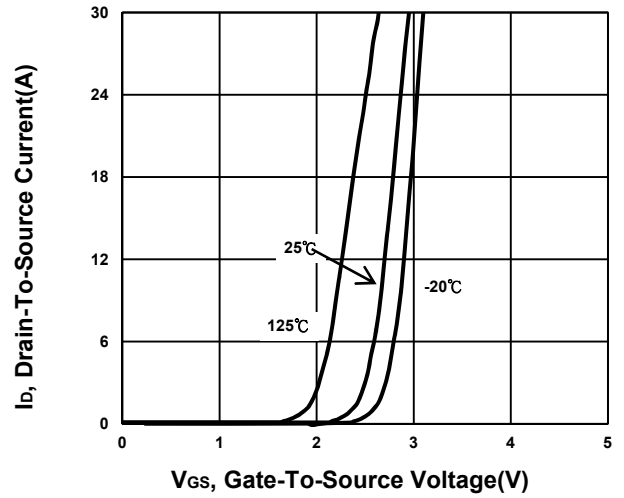


On-Resistance VS Gate-To-Source

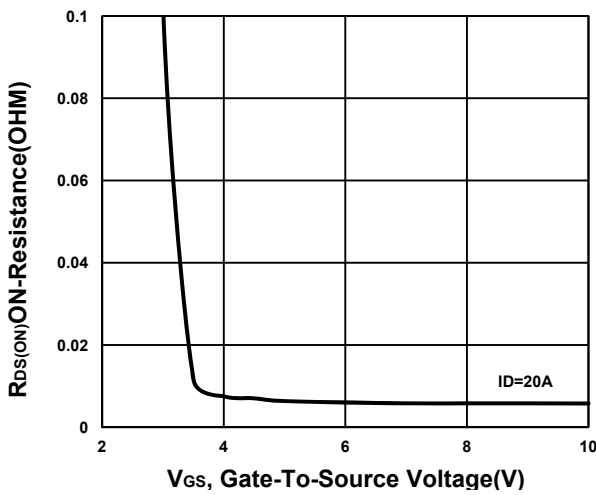


On-Resistance VS Drain Current

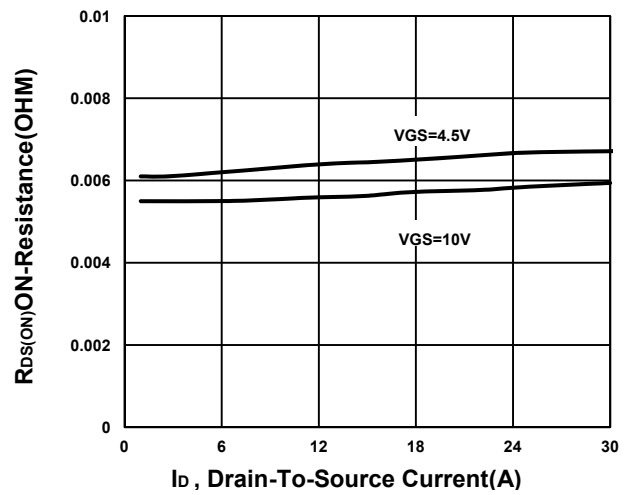


On-Resistance VS Temperature

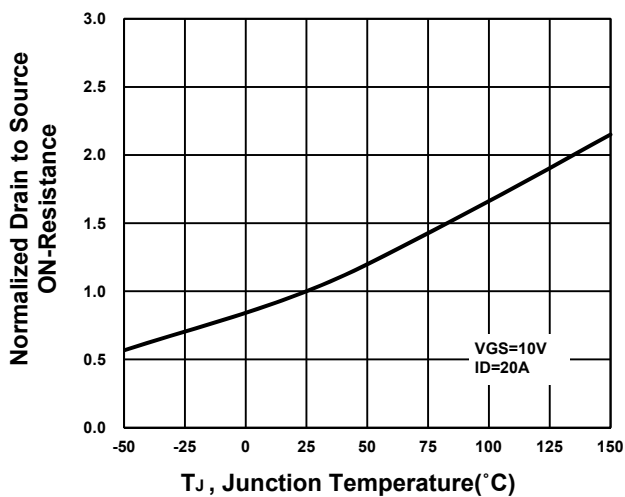


Capacitance Characteristic

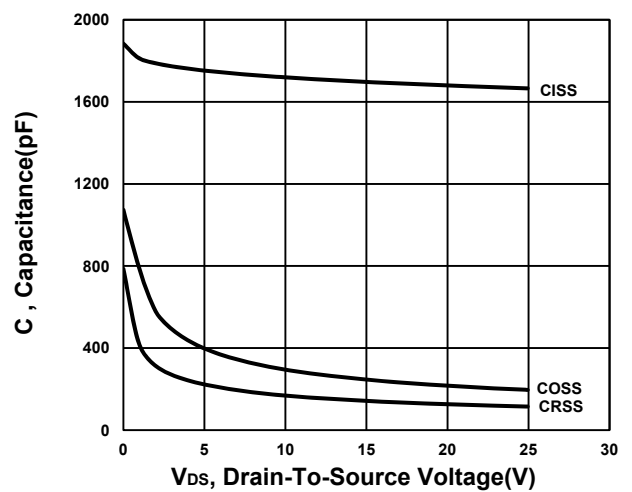


Gate charge Characteristics

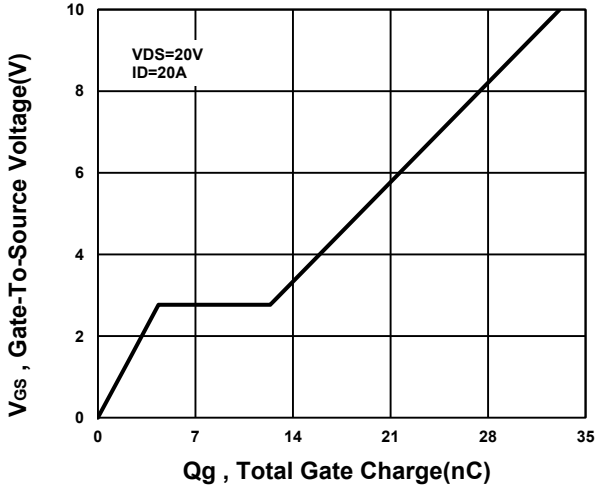


Source-Drain Diode Forward Voltage

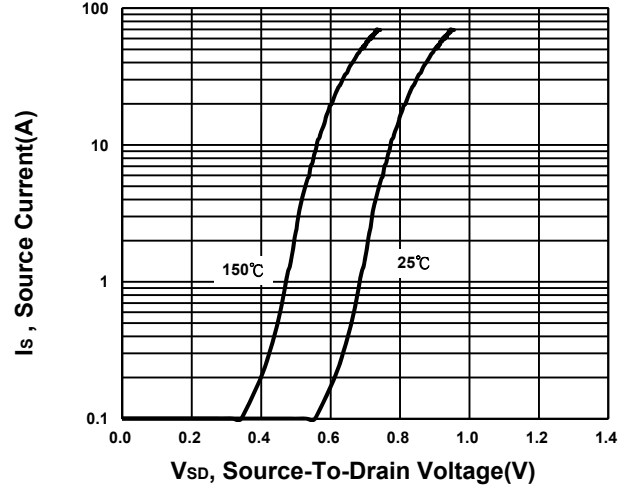

Safe Operating Area

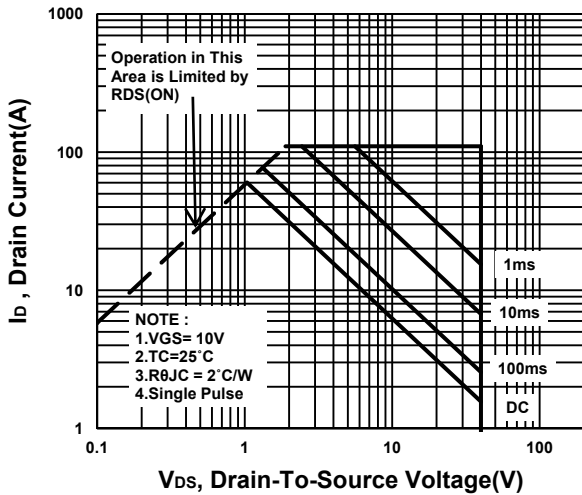

Single Pulse Maximum Power Dissipation

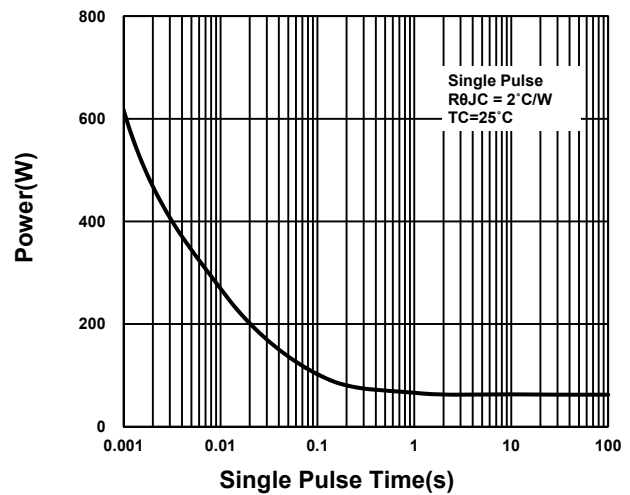

Transient Thermal Response Curve

