

# Radar Pulsed Power Transistor, 30W, 1 $\mu$ s Pulse, 10% Duty 3.1 - 3.4 GHz

## PH3134-30S


V2.00

### Features

- NPN Silicon Microwave Power Transistor
- Common Base Configuration
- Broadband Class C Operation
- High Efficiency Interdigitated Geometry
- Diffused Emitter Ballasting Resistors
- Gold Metalization System
- Internal Input and Output Impedance Matching
- Hermetic Metal/Ceramic Package

### Absolute Maximum Ratings at 25°C

Parameter	Symbol	Rating	Units
Collector-Emitter Voltage	$V_{CES}$	65	V
Emitter-Base Voltage	$V_{EBO}$	3.0	V
Collector Current (Peak)	$I_C$	3.6	A
Total Power Dissipation	$P_{TOT}$	350	W
Junction Temperature	$T_J$	200	°C
Storage Temperature	$T_{STG}$	-65 to +200	°C

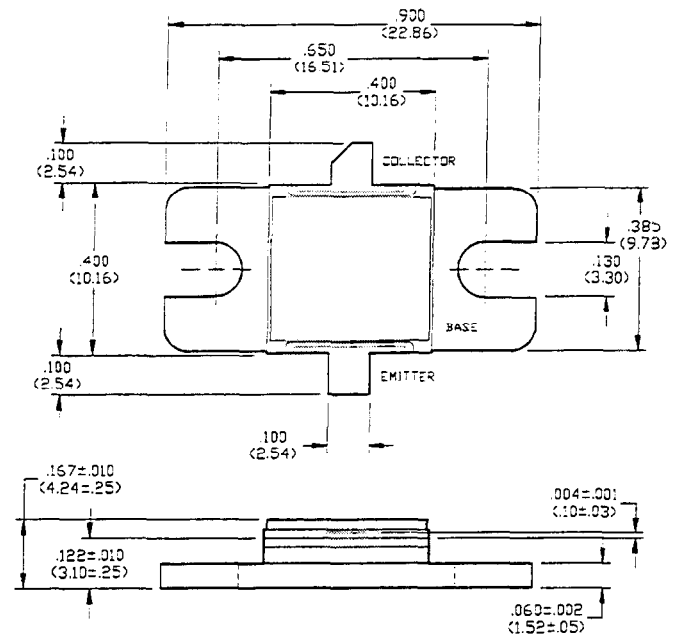


UNLESS OTHERWISE NOTED, TOLERANCES ARE INCHES ±.005" (MILLIMETERS = ±.13MM)

### Electrical Characteristics at 25°C


Parameter	Symbol	Min	Max	Units	Test Conditions
Collector-Emitter Breakdown Voltage	$BV_{CES}$	65	-	V	$I_C=10$ mA
Collector-Emitter Leakage Current	$I_{CES}$	-	1.5	mA	$V_{CE}=40$ V
Thermal Resistance	$R_{TH(JC)}$	-	0.5	°C/W	$V_{CC}=36$ V, $P_{OUT}=30$ W, $F=3.10, 3.25, 3.40$ GHz
Input Power	$P_{IN}$	-	5.33	W	$V_{CC}=36$ V, $P_{OUT}=30$ W, $F=3.10, 3.25, 3.40$ GHz
Power Gain	$G_P$	7.5	-	dB	$V_{CC}=36$ V, $P_{OUT}=30$ W, $F=3.10, 3.25, 3.40$ GHz
Collector Efficiency	$\eta_C$	35	-	%	$V_{CC}=36$ V, $P_{OUT}=30$ W, $F=3.10, 3.25, 3.40$ GHz
Input Return Loss	RL	6	-	dB	$V_{CC}=36$ V, $P_{OUT}=30$ W, $F=3.10, 3.25, 3.40$ GHz
Load Mismatch Tolerance	VSWR-T	-	2:1	-	$V_{CC}=36$ V, $P_{OUT}=30$ W, $F=3.25$ GHz

### Broadband Test Fixture Impedances

F (GHz)	$Z_{in}(\Omega)$	$Z_{out}(\Omega)$
3.10	16.0 + j5.0	19.0 + j3.0
3.25	14.5 + j2.0	15.5 - j2.0
3.40	11.5 + j0.0	10.0 - j3.5

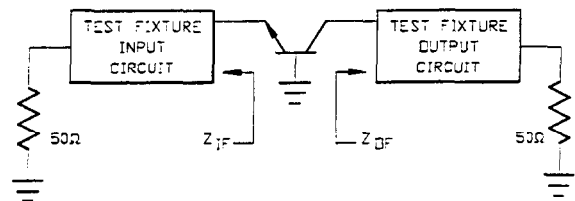

RF Test Fixture

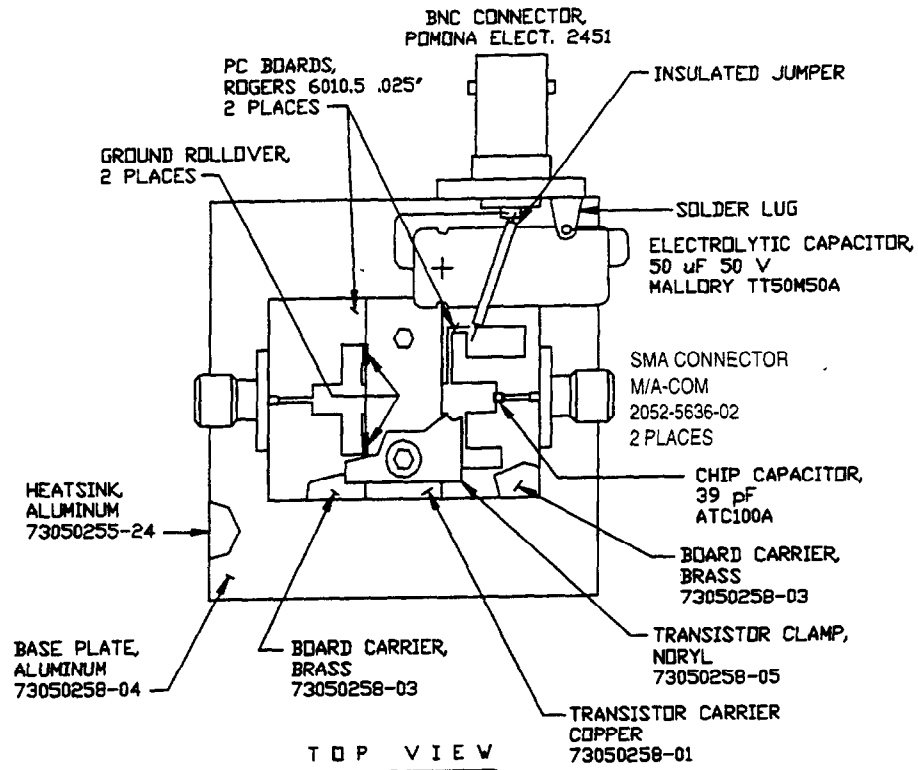

Test Fixture PC Board Dimensions

