


**TelecomBus Serializer for 2.5 Gbit/s Interconnect**

**FEATURES**

- Encodes data from the Incoming parallel TelecomBus to a set of four working, a set of four protection, and a set of four auxiliary 777.6 Mbit/s LVDS serial TelecomBus links with extended 8B/10B-based encoding.
- Decodes data from a set of four working, a set of four protection, or a set of four auxiliary 777.6 MHz LVDS serial links with extended 8B/10B-based encoding to the Outgoing TelecomBus stream.
- Provides capacity to carry an STS-12/STM-4 stream in each LVDS serial TelecomBus link. Four links can be aggregated to form an STS-48c/STM-16c stream.
- Provides capacity to carry an STS-12/STM-4 stream in each 8-bit bus of the parallel TelecomBus stream. Four 8-bit buses can be aggregated to carry an STS-48c/STM-16c stream.
- Provides redundant working, protection and auxiliary transmit LVDS serial TelecomBus streams and redundant receive LVDS serial TelecomBus streams for protection switching purposes.
- Provides independent time-slot interchange blocks on the Incoming and Outgoing parallel TelecomBus streams to allow arbitrary arrangement of time-slots at STS-1 granularity.
- Supports redundant working/protection time-space-time switch fabric.
- Supports through-traffic, drop-traffic and protection switching in UPSR, 2-fibre BLSR and 4-fibre BLSR applications (when used with the PM5372 TSE).
- Uses extended 8B/10B-based line coding protocol on the serial links to provide transition density guarantee and DC balance and to offer a greater control character vocabulary than the standard 8B/10B protocol.
- Provides encoding of TelecomBus control signals at the multiplex section termination (MST) point, high-order path termination (HPT) point and low-order path termination (LPT) point.
- Provides optional PRBS generation for each outgoing LVDS serial TelecomBus data link for off-line link verification.
- Provides PRBS detection for each 8-bit bus on the Incoming parallel TelecomBus stream.
- Provides PRBS detection for each incoming LVDS serial TelecomBus stream for off-line link verification.
- Provides optional PRBS generator for each 8-bit bus on the outgoing parallel TelecomBus stream.
- Provides in-service link verification by optionally overwriting the B1 and E1 byte of each constituent STS-1/STM-0 with a unique software programmable byte and its complement.
- Provides pins to coordinate updating of the connection map of the time-slot interchange blocks in the local device, peer PM5310 TBS devices and companion PM5372 TSE devices.
- Derives all internal timing from a single 77.76 MHz system clock.

**BLOCK DIAGRAM**

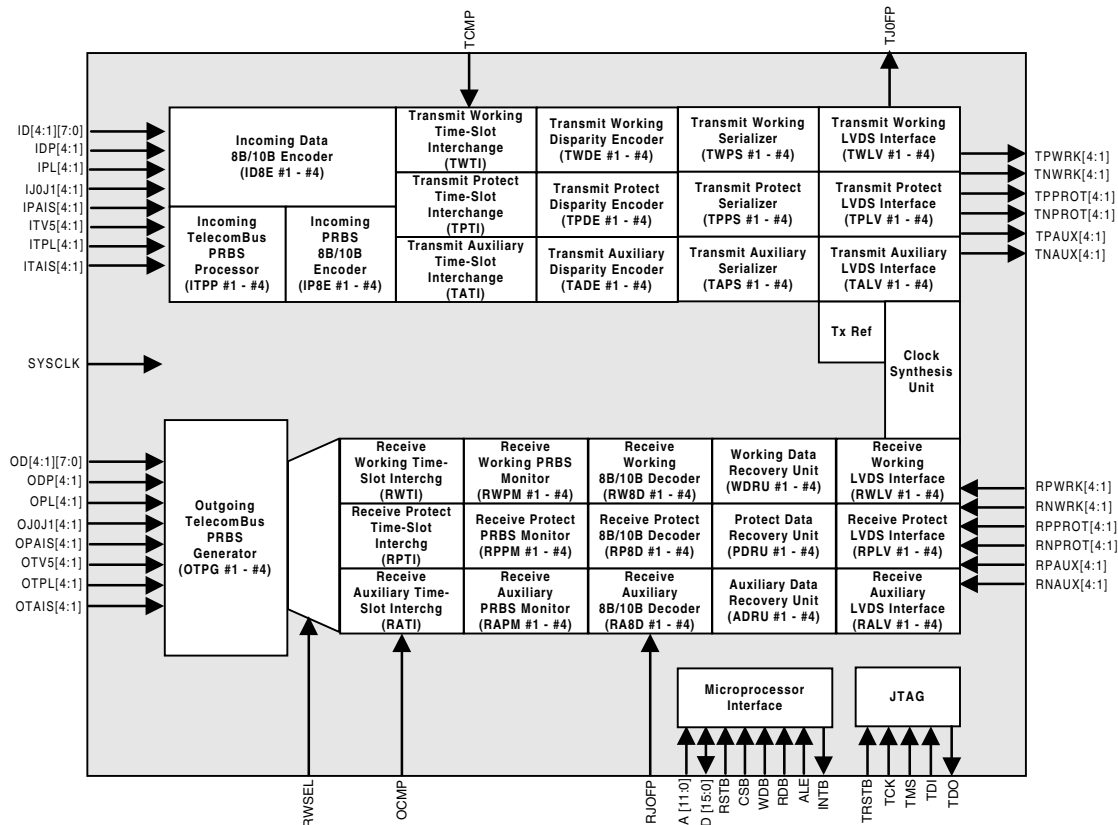

# TelecomBus Serializer for 2.5 Gbit/s Interconnect

- Provides a generic 16-bit microprocessor bus interface for configuration, control, and status monitoring.
- Implemented in 1.8/3.3 V 0.18 mm CMOS and packaged in a 352 ball UBGA.


- Low power consumption of 4.2 W (maximum).

## APPLICATIONS


- SONET/SDH Cross-connects.
- SONET/SDH Add-Drop Multiplexors.
- SONET/SDH Terminal Multiplexors.
- TelecomBus Serializer.
- TelecomBus Backplane Driver.

## TYPICAL APPLICATIONS

### 2.5 GBIT/S ADM APPLICATION

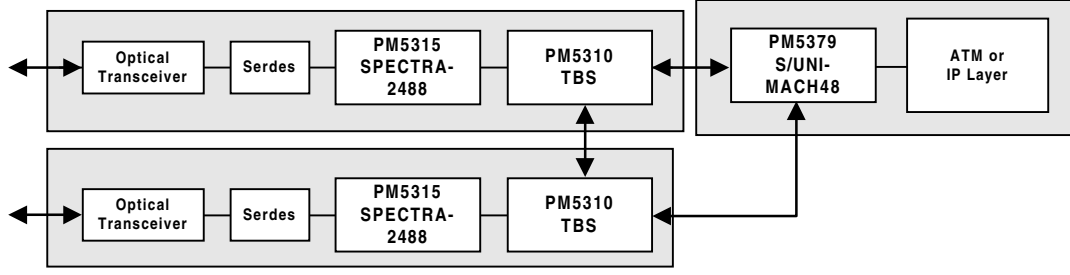

### MULTI-SERVICE ATM/POS SWITCH PORT APPLICATION

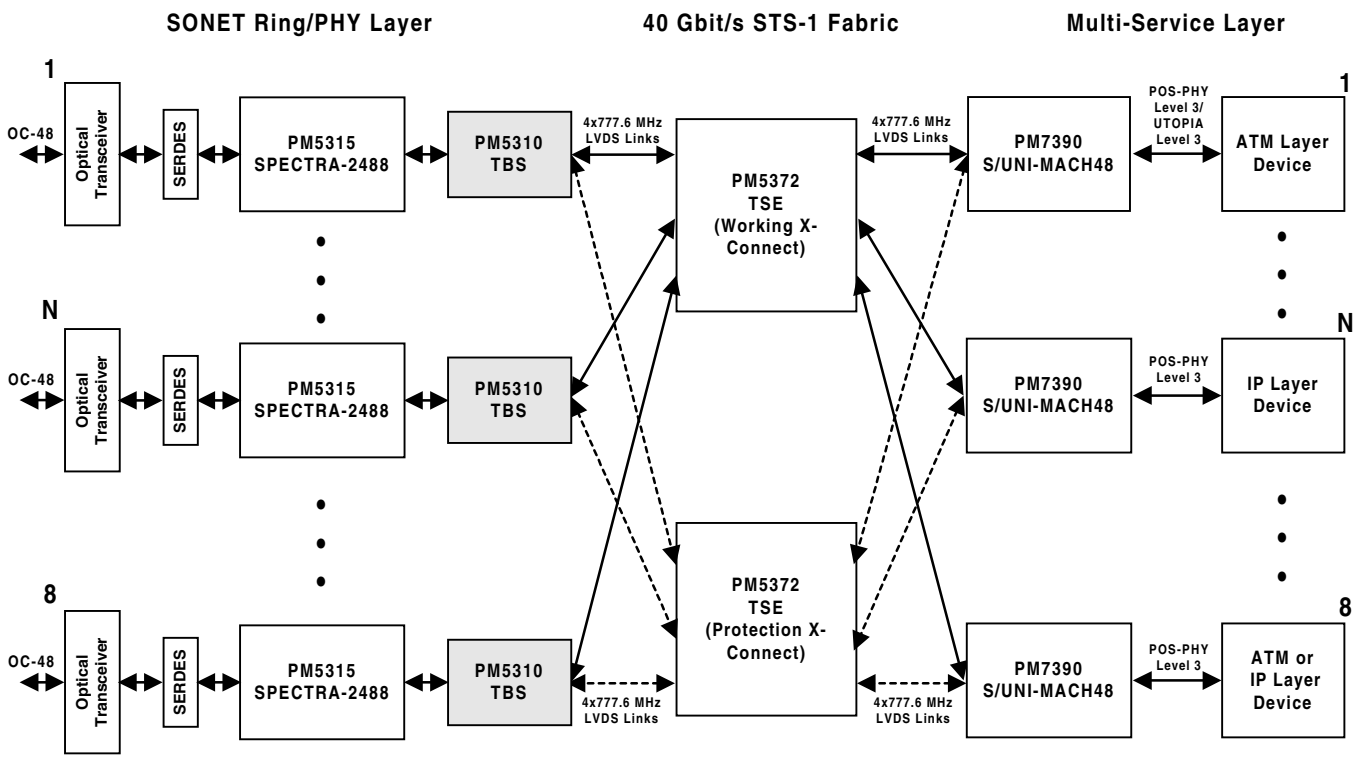

Head Office:  
 PMC-Sierra, Inc.  
 #105 - 8555 Baxter Place  
 Burnaby, B.C. V5A 4V7  
 Canada  
 Tel: 604.415.6000  
 Fax: 604.415.6200

To order documentation,  
 send email to:  
 document@pmc-sierra.com  
 or contact the head office,  
 Attn: Document Coordinator

All product documentation is available  
 on our web site at:  
<http://www.pmc-sierra.com>  
 For corporate information,  
 send email to:  
 info@pmc-sierra.com

PMC-2000329 (P1)  
 © Copyright PMC-Sierra,  
 Inc. 2000. All rights reserved.  
 March 2000