


SMD Package



Size: 0.80in x 0.45in x 0.25in

SIP Vertical Package

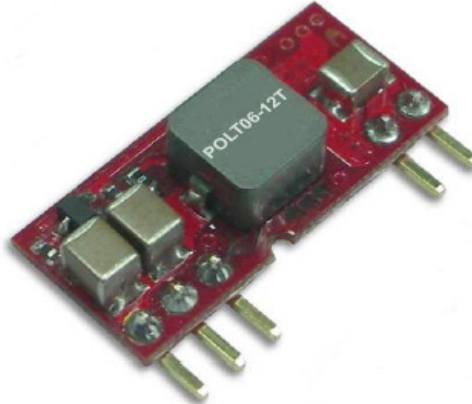

Size: 0.90in x 0.40in x 0.23in

SIP Horizontal Package



Size: 0.90in x 0.40in x 0.40in

**OPTIONS**

- SMD or SIP Package Type Available
- Vertical or Horizontal Mounting for SIP Package
- Remote Control Positive or Negative Logic

**FEATURES**

- SMD and SIP packages available
- High Efficiency of 89%
- Small Size and Low Profile
- SMD Package qualifies for Leadfree Reflow Solder Process According to IPC J-STD-020D
- Delivers up to 6A of Output Current
- Fixed Switching Frequency
- Output Voltage Programmable from 0.75VDC to 5VDC via External Resistor
- No Minimum Load Required
- CE Marked
- RoHS II & REACH
- Over Load, Over Temperature, and Short Circuit Protection
- Remote ON/OFF
- UL60950-1, EN60950-1, & IEC60950-1 Safety Approvals

**APPLICATIONS**

- Wireless Network
- Telecom/Datacom
- Industry Control System
- Distributed Power Architectures
- Semiconductor Equipment
- Microprocessor Power Applications

**DESCRIPTION**

The POL06-12T series of DC DC open frame converters offers up to 6A of output current. This series has an input voltage range of 8.3~13.2 (14)VDC and programmable output voltage via external resistor ranging from 0.75~5VDC. No minimum load is required and there is a fixed switching frequency for this series. POL06-12T has many options available including an SMD or SIP package type, vertical or horizontal mounting for SIP package, or positive or negative logic. This series has over load, over temperature, and short circuit protection, is RoHS II & REACH, and has UL60950-1, EN60950-1, & IEC60950-1 safety approvals. Please call factory for order details.

**MODEL SELECTION TABLE**

Model Number	Input Voltage Range	Output Voltage	Output Current @ Full Load	Efficiency	Package Type	Remote ON/OFF
POLS06-12T	12VDC (8.3~14VDC)	0.75~5VDC	6A	89%	SMD	Positive
POLS06-12T-P						Negative
POLT06-12T	12VDC (8.3~13.2VDC)	0.75~5VDC	6A	89%	SIP Vertical	Positive
POLT06-12T-P						Negative
POLT06-12TA					SIP Horizontal	Positive
POLT06-12TA-P						Negative

**SPECIFICATIONS**

All specifications are based on 25°C, Nominal Input Voltage, and Maximum Output Current unless otherwise noted.  
 We reserve the right to change specifications based on technological advances.

SPECIFICATION	TEST CONDITIONS	Min	Typ	Max	Unit
<b>INPUT SPECIFICATIONS</b>					
Input Voltage Range	Vout(set) ≤3.63VDC	8.3	12	14	VDC
	Vout(set) >3.63VDC	8.3	12	13.2	
Start-Up Voltage			30		mAp-p
Shutdown Voltage			7.8		VDC
Input Reflected Ripple Current	5~20MHz, 1μH source impedance		30		mAp-p
Maximum Input Current	Vin=Vin(min), Io=Io(max.)		4.5		A
Input Filter <sup>(1)</sup>		Capacitor Type			
<b>OUTPUT SPECIFICATIONS</b>					
Output Voltage		0.75		5	VDC
Voltage Accuracy	% of Vout(set)	-2.0		+2.0	%
Line Regulation	Vin=Vin(min.) to Vin(max.) at Full Load; % of Vout(set)	-0.3		+0.3	%
Load Regulation	No Load to Full Load; % of Vout(set)	-0.4		+0.4	%
Voltage Adjustability <sup>(2)</sup>		0.7525		5	VDC
Output Current				6	A
Minimum Load		0			%
Maximum Capacitive Load <sup>(3)</sup>	ESR≥1mΩ		1000		μF
	ESR≥10mΩ		3000		
Ripple & Noise (20MHz bandwidth)	Measured by 20MHz bandwidth with a 1μF MLCC & a 10μF T/C			20	mVrms
				50	mVp-p
No Load Input Current	0.75VDC		17		mA
	5.0VDC		100		
Dynamic Load Response <sup>(4)</sup>	ΔIo/Δt=2.5A/μs, Vin(nom)	Peak Deviation		200	mV
	50% Load Step Change	Setting Time (Vout<10%peak deviation)		25	μs
Dynamic Load Response <sup>(5)</sup>	ΔIo/Δt=2.5A/μs, Vin(nom)	Peak Deviation		50	mV
	50% Load Step Change	Setting Time (Vout<10%peak deviation)		50	μs
Rise Time	Time for Vout to rise from 10% to 90% of Vout(set)			6	mS
Output Voltage Overshoot-Startup	Vin=Vin(min.) to Vin(max.) at Full Load; % of Vout(set)		1.0		%
Temperature Coefficient		-0.4		+0.4	%/°C
<b>REMOTE ON/OFF CONTROL<sup>(6)</sup></b>					
Negative Logic (Option)	DC/DC ON	Open or 0~0.3VDC			
	DC/DC OFF	2.5VDC-Vin(max.)			
Positive Logic (Standard)	DC/DC ON	Open or (Vin-4)~Vin(max.)			
	DC/DC OFF	0~0.3VDC			
Input Current of CTRL Pin		0.1		1.0	mA
Remote OFF Input Current			1.2		mA
Turn-On Delay Time	Case 1 <sup>(7)</sup>		3		ms
	Case 2 <sup>(8)</sup>				
<b>PROTECTION</b>					
Short Circuit Protection		Continuous, Automatic Recovery			
Over Load Protection	% of Iout		200		%
Over Temperature Protection			140		°C
<b>ENVIRONMENTAL SPECIFICATIONS</b>					
Operating Ambient Temperature	With Derating	-40		+85	°C
Storage Temperature		-55		+125	°C
Thermal Shock		MIL-STD-801F			
Relative Humidity	Non-Condensing	5		95	%RH
Vibration		MIL-STD-810F			
Lead-Free Reflow Solder Process		IPC J-STD-020D			
Moisture Sensitivity Level (MSL)		IPC J-STD-033B Level 2a			
MTBF	MIL-HDBK-217F, Full Load	9,277,000			Hours

**SPECIFICATIONS**


All specifications are based on 25°C, Nominal Input Voltage, and Maximum Output Current unless otherwise noted.  
 We reserve the right to change specifications based on technological advances.

SPECIFICATION	TEST CONDITIONS	Min	Typ	Max	Unit
<b>GENERAL SPECIFICATIONS</b>					
Efficiency	3.3VDC@Full Load		89		%
Switching Frequency		270	300	330	kHz
<b>PHYSICAL SPECIFICATIONS</b>					
Weight			0.1oz (2.8g)		
Dimensions (L x W x H)	SMD Package	0.80in x 0.45in x 0.25in (20.3mm x 11.4mm x 6.4mm)			
	Vertical SIP Package	0.90in x 0.40in x 0.23in (22.9mm x 10.2mm x 5.9mm)			
	Horizontal SIP Package	0.90in x 0.40in x 0.40in (22.9mm x 10.2mm x 10.1mm)			
<b>SAFETY &amp; EMC CHARACTERISTICS</b>					
Safety Approvals		UL60950-1 EN60950-1 IEC60950-1			

**NOTES**

- It's necessary to equip the external input capacitors at the input of the module. The capacitors should connect as close as possible to the input terminals that ensuring module stability. The external C<sub>in</sub> is 2pcs of 47µF ceramic capacitors at least.
- Output voltage programmable from 0.7525V to 5V by connecting a single resistor (shown as Trim Table) between the Trim and GND pins of the module. To calculate the value of the resistor R<sub>trim</sub> for a particular output voltage V<sub>out</sub> use the following equation:

$$R_{trim} = \left[ \frac{10500}{V_{out} - 0.7525} - 1000 \right] \Omega$$




V <sub>out(set)</sub> (VDC)	R <sub>trim</sub> (kΩ)
0.7525	Open
1.2	22.46
1.5	13.05
1.8	9.024
2.5	5.009
3.3	3.122
5	1.472

- Test by minimum input and constant resistive load.
- With a 1µF MLCC & a 10µF T/C
- With 2pcs of 150µF polymer capacitors
- Remote ON/OFF Referred to -Vin pin  
Positive Logic: ON/OFF is open collector/drain logic input  
Negative Logic: ON/OFF pin is open collector/drain logic input with external pull-up resistor
- Case 1: ON/OFF input is set to logic low (module on) and then input power is applied (delay from instant at which Vin=Vin(min.)) until V<sub>out</sub>=10% of V<sub>out(set)</sub>
- Case 2: Input power is applied for at least one second and then the ON/OFF input is set to logic low (delay from instant at which V<sub>on/off</sub>=0.3VDC until V<sub>out</sub>=10% of V<sub>out(set)</sub>)


**CAUTION:** This power module is not internally fused. An input line fuse must always be used.

**CHARACTERISTIC CURVES**

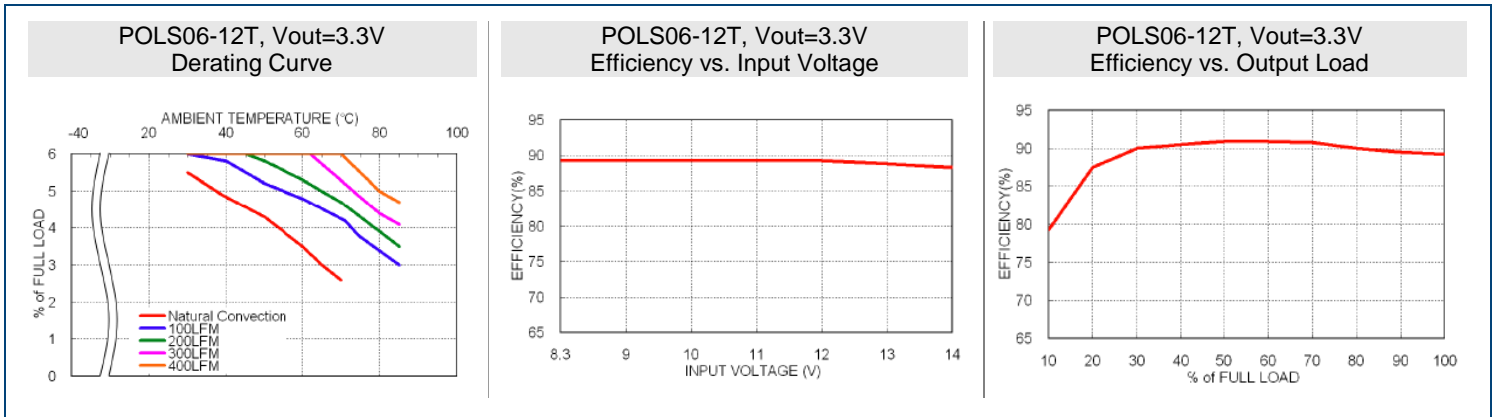

MECHANICAL DRAWINGS


SMD Package

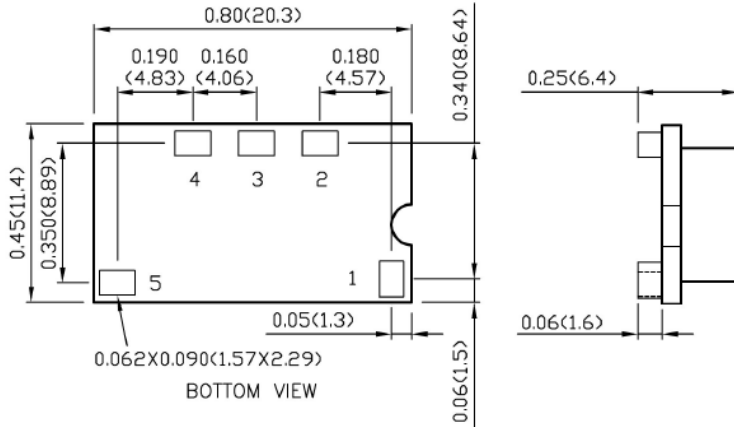

PIN Connection

PIN	DEFINE
1	Ctrl
2	+Vout
3	Trim
4	GND
5	+Vin

SIP Vertical Package

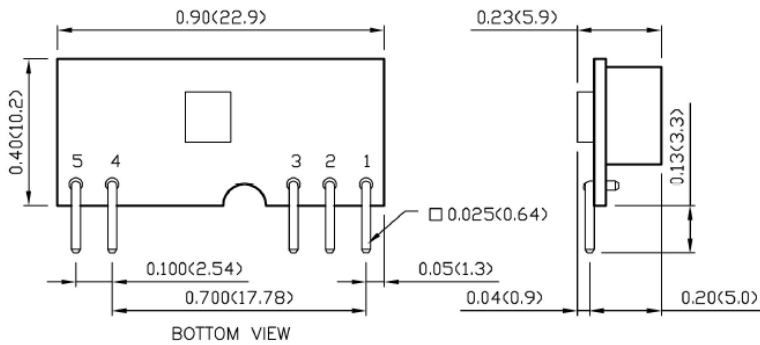

PIN Connection

PIN	DEFINE
1	+Vout
2	Trim
3	GND
4	+Vin
5	Ctrl

SIP Horizontal Package



PIN Connection

PIN	DEFINE
1	+Vout
2	Trim
3	GND
4	+Vin
5	Ctrl

1. All dimensions in inch (mm)
2. Tolerance: x.xx0.02 (x.x±0.5)  
x.xxx±0.01 (x.xx±0.25)
3. Pin pitch tolerance ±0.01 (0.25)
4. Pin dimension tolerance ±0.004(0.1)

MODEL NUMBER SETUP

POLT	06	-	12	TA	P
Series Name	Output Current		Input Voltage	Package	Remote On/Off & Pin Length
<b>POLS:</b> SMD Type <b>POLT:</b> SIP Type	<b>06:</b> 6A		<b>12:</b> 8.3~14VDC	<b>T:</b> No Assembly <b>T:</b> Vertical Mounting SIP <b>TA:</b> Horizontal Mounting SIP	<b>None:</b> Positive Logic <b>P:</b> Negative Logic

COMPANY INFORMATION

Wall Industries, Inc. has created custom and modified units for over 50 years. Our in-house research and development engineers will provide a solution that exceeds your performance requirements on-time and on budget. Our ISO9001-2008 certification is just one example of our commitment to producing a high quality, well-documented product for our customers.

Our past projects demonstrate our commitment to you, our customer. Wall Industries, Inc. has a reputation for working closely with its customers to ensure each solution meets or exceeds form, fit and function requirements. We will continue to provide ongoing support for your project above and beyond the design and production phases. Give us a call today to discuss your future projects.

Contact **Wall Industries** for further information:

Phone: ☎ (603)778-2300  
 Toll Free: ☎ (888)597-9255  
 Fax: ☎ (603)778-9797  
 E-mail: [sales@wallindustries.com](mailto:sales@wallindustries.com)  
 Web: [www.wallindustries.com](http://www.wallindustries.com)  
 Address: 37 Industrial Drive  
 Exeter, NH 03833