

8 PIN SOP, 400 V BREAKDOWN VOLTAGE NORMALLY CLOSED TYPE 2 CH OPTICAL COUPLED MOSFET

PS7241-2B

FEATURES

- **2 CHANNEL TYPE:**
1b + 1b OUTPUT
- **DESIGNED FOR AC/DC SWITCHING LINE CHANGER**
- **SMALL AND THIN PACKAGE:**
8 PIN SOP
- **LOW OFFSET VOLTAGE**
- **LOW LED OPERATING CURRENT:**
 $I_F = 2 \text{ mA}$
- **AVAILABLE IN TAPE AND REEL**

DESCRIPTION

PS7241-2B is a solid state relay containing a GaAs LED on the light emitting side (input side) and normally closed (N.C.) contact MOSFETs on the output side.

This device is suitable for analog signal control because of its low offset and high linearity.

APPLICATIONS



- EXCHANGE EQUIPMENT
- MEASUREMENT EQUIPMENT
- FA/OA EQUIPMENT
- MODEM

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$)

PART NUMBER			PS7241-2B			
SYMBOLS	PARAMETERS	UNITS	MIN	TYP	MAX	
Diode	V_F	Forward Voltage, $I_F = 10 \text{ mA}$	V	1.2	1.4	
	I_R	Reverse Current, $V_R = 5 \text{ V}$	μA		5	
MOSFET	I_{Loff}	Off-State Leakage Current, $I_F = 10 \text{ mA}$, $V_D = 400 \text{ V}$	μA	0.03	1	
	C_{out}	Output Capacitance, $I_F = 10 \text{ mA}$, $V_o = 0 \text{ V}$, $f = 1.0 \text{ MHz}$	pF/ch	185		
Coupled	I_{Foff}	LED Off-state Current, $I_L = 120 \text{ mA}$	mA		2.0	
	R_{on1}	On-State Resistance, $I_F = 0 \text{ mA}$, $I_L = 10 \text{ mA}$	Ω	21	30	
	R_{on2}			$I_F = 0 \text{ mA}$, $I_L = 120 \text{ mA}$, $t \leq 10 \text{ ms}$	16	25
	t_{ON}	Turn-On Time ¹	$I_F = 10 \text{ mA}$, $V_o = 5 \text{ V}$, $R_L = 2 \text{ k}\Omega$, $PW \geq 10 \text{ ms}$	ms	0.02	0.2
	t_{OFF}	Turn-Off Time ¹			0.1	1.0
	Ri-O	Isolation Resistance, $V_{IN-OUT} = 1.0 \text{ kVDC}$	Ω	10^9		
	Cl-O	Isolation Capacitance, $V = 0 \text{ V}$, $f = 1 \text{ MHz}$	pF/ch		0.4	

Note:

1. Test Circuit for Switching Time:

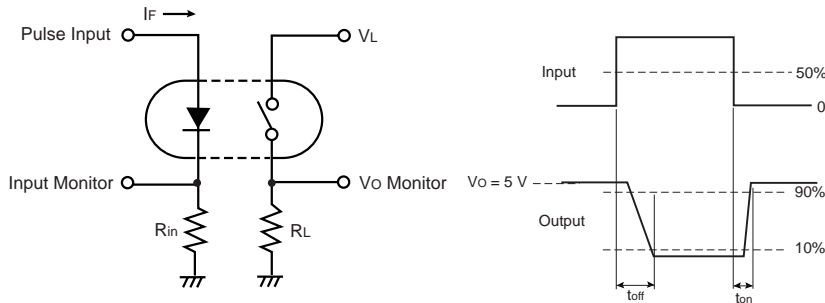

ABSOLUTE MAXIMUM RATINGS¹ (T_A = 25°C)

SYMBOLS	PARAMETERS	UNITS	RATINGS
Diode			
V _R	Reverse Voltage	V	5
I _F	Forward Current (DC)	mA	50
P _D	Power Dissipation	mW/ch	50
I _{F (Peak)}	Peak Forward Current ²	A	1
MOSFET			
V _L	Break Down Voltage	V	400
I _L	Continuous Load Current	mA	120
I _{LP}	Pulse Load Current AC/DC Connection ³	mA	200
P _D	Power Dissipation	mW/ch	180
Coupled			
BV	Isolation Voltage ⁴	Vr.m.s.	1500
P _T	Total Power Dissipation	mW	460
T _{STG}	Storage Temperature	°C	-40 to +100
T _A	Ambient Temperature	°C	-40 to +80

Notes:


- Operation in excess of any one of these parameters may result in permanent damage.
- PW = 100 μs, Duty Cycle = 1 %
- PW = 100 ms, 1 shot.
- AC voltage for 1 minute at T_A = 25 °C, RH = 60 % between input and output.

ORDERING INFORMATION

PART NUMBER	PACKAGE	PACKING STYLE
PS7241-2B	8 pin SOP	Magazine case 45 pcs
PS7241-2B-F3		Embossed tape 1500 pcs/reel
PS7241-2B-F4		







RECOMMENDED OPERATING CONDITIONS (T_A = 25 °C)

SYMBOL	PARAMETER	UNITS	MIN	TYP	MAX
I _F	LED Operating Current	mA	2	10	20
V _F	LED Off Voltage	V	0		0.5

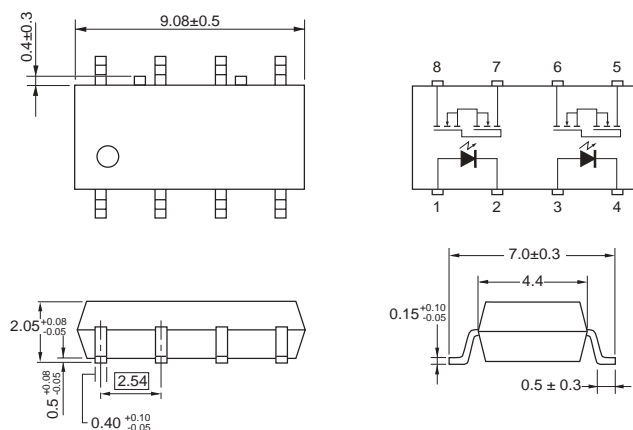OUTLINE DIMENSIONS (Units in mm)


- LED Anode 1
- LED Cathode 1
- LED Anode 2
- LED Cathode 2
- MOSFET 2
- MOSFET 2
- MOSFET 1
- MOSFET 1

TYPICAL PERFORMANCE CURVES (TA = 25 °C)

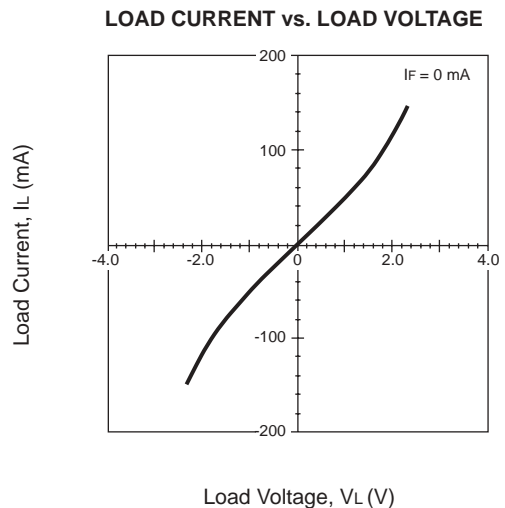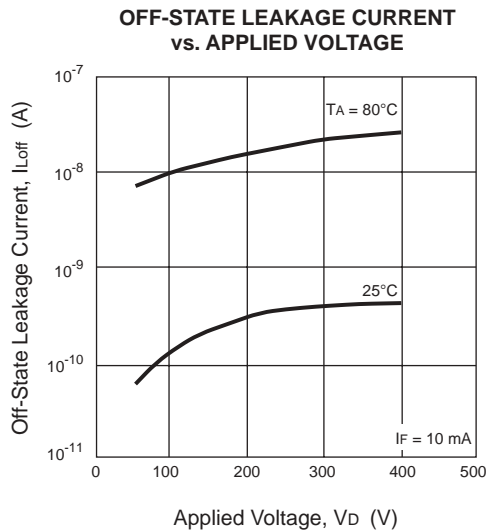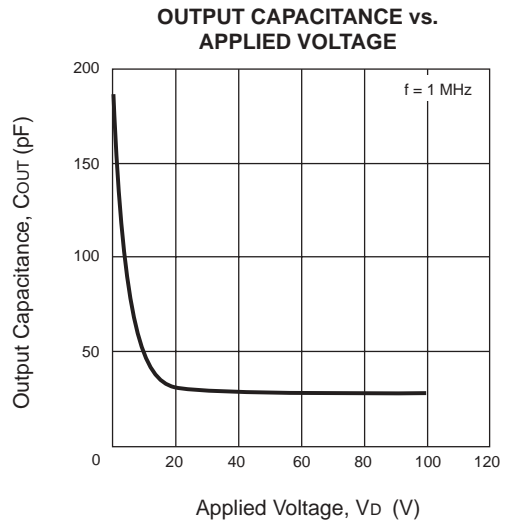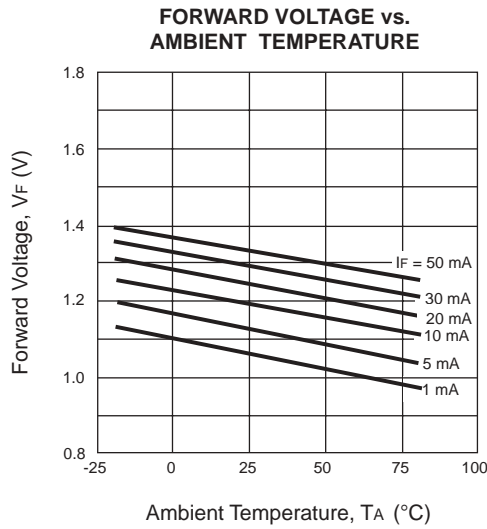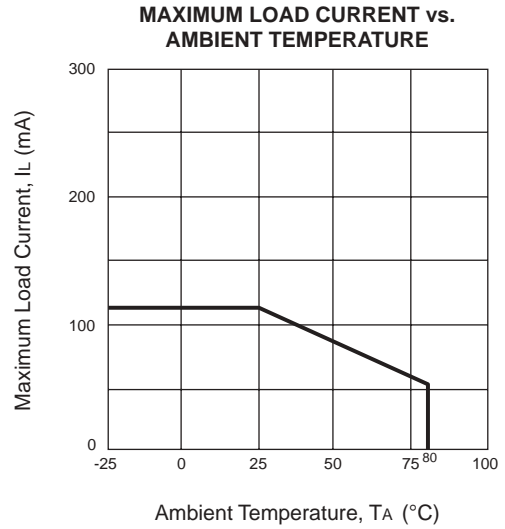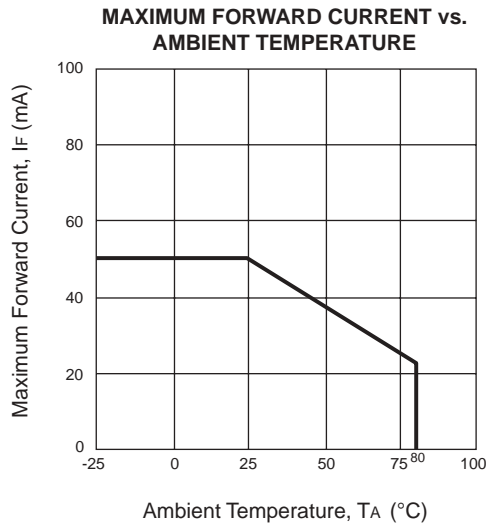


TYPICAL PERFORMANCE CURVES (TA = 25 °C)


NORMALIZED ON-STATE RESISTANCE vs. AMBIENT TEMPERATURE

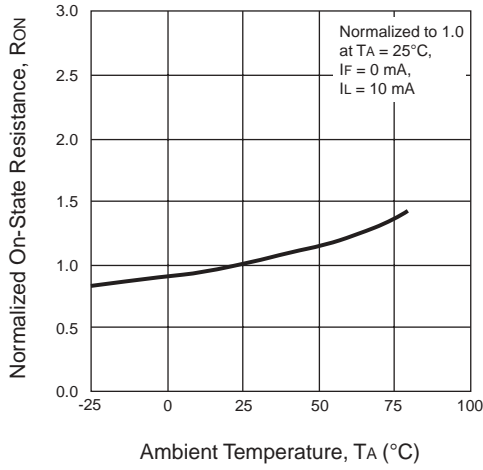


ON-STATE RESISTANCE DISTRIBUTION

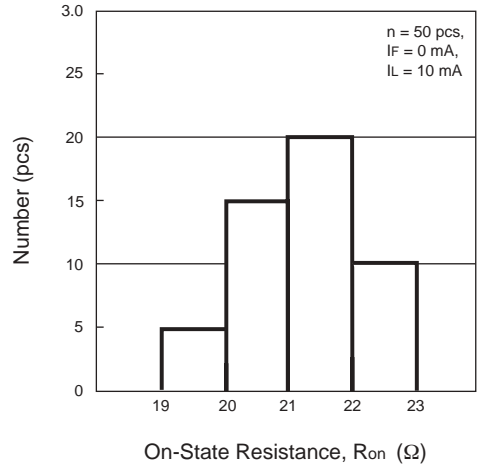


TURN-ON TIME vs. FORWARD CURRENT

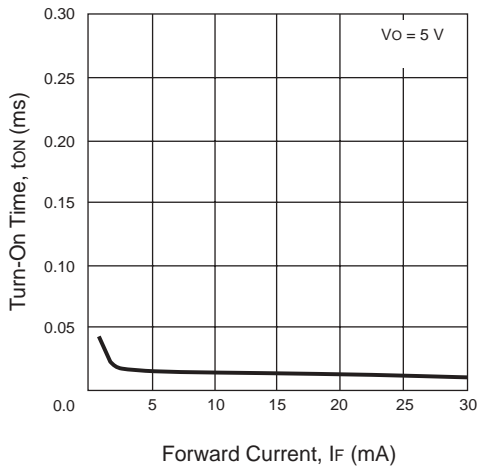


TURN-OFF TIME vs. FORWARD CURRENT

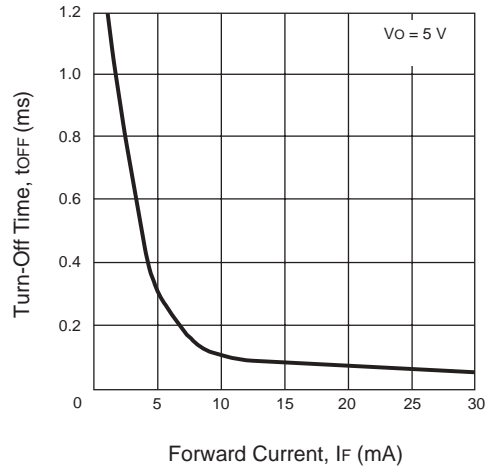

TURN-ON TIME DISTRIBUTION

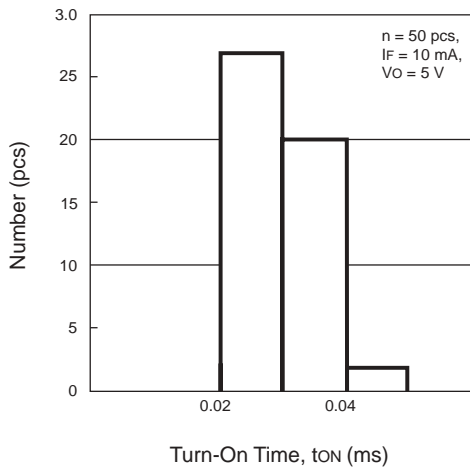


TURN-OFF TIME DISTRIBUTION

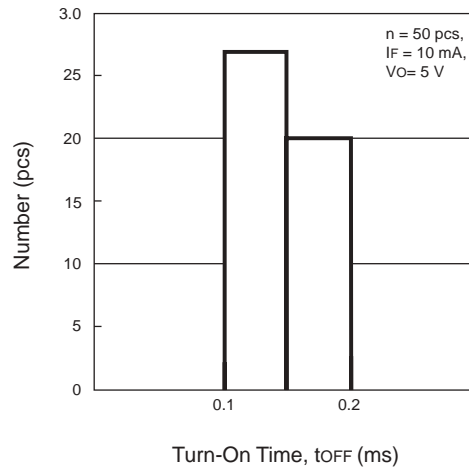


TYPICAL PERFORMANCE CURVES ($T_A = 25\text{ }^\circ\text{C}$)

NORMALIZED TURN-ON TIME vs. AMBIENT TEMPERATURE

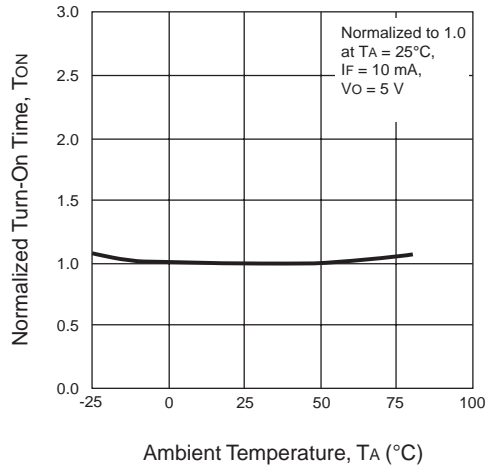


NORMALIZED TURN-OFF TIME vs. AMBIENT TEMPERATURE

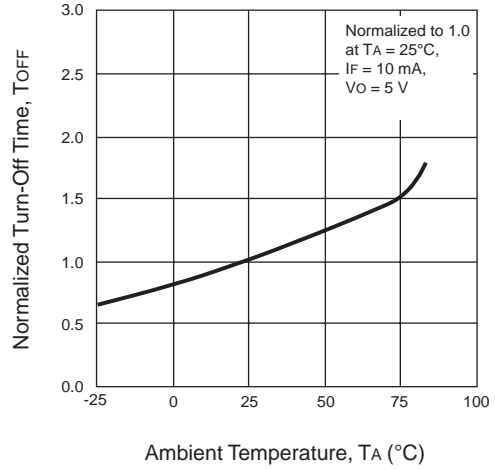


TAPING SPECIFICATIONS (Units in mm)

OUTLINE AND DIMENSIONS (TAPE)

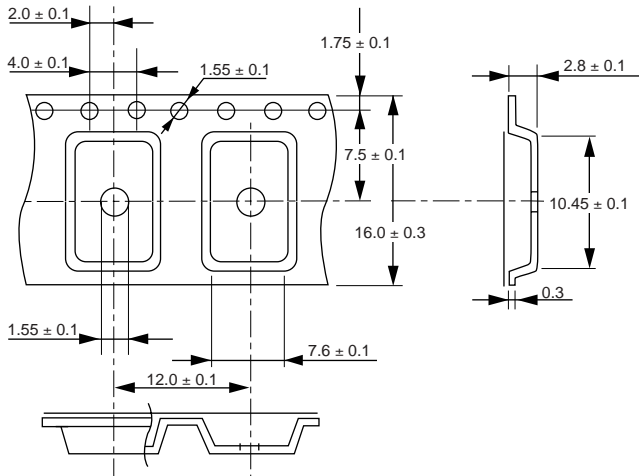


OUTLINE AND DIMENSIONS (REEL)

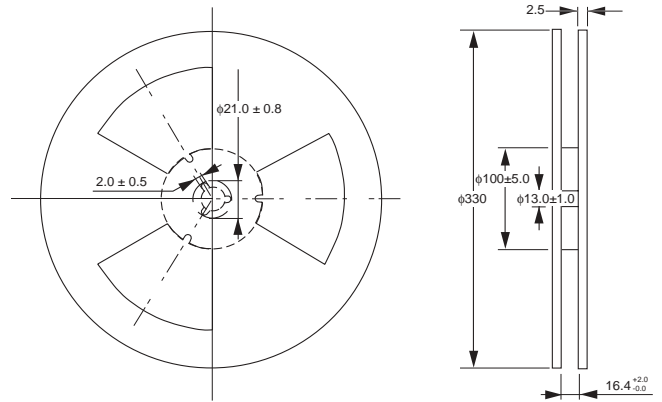

Notes:
1. Packing : 1500 pcs/reel

TAPING DIRECTION

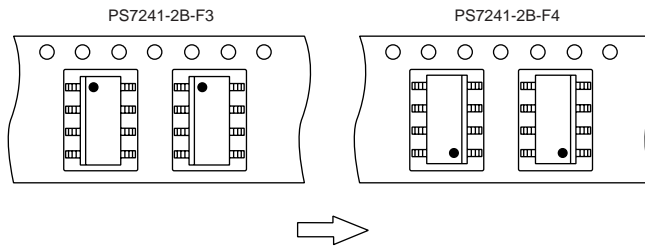


RECOMMENDED SOLDERING CONDITIONS

(1) Infrared reflow soldering

- Peak reflow temperature 235 °C or below (package surface temperature)
- Time of temperature higher than 210 °C 30 seconds or less
- Number of reflows Two
- Flux Rosin flux containing small amount of chlorine
(The flux with a maximum chlorine content of 0.2 Wt % is recommended.)

Recommended Temperature Profile of Infrared Reflow

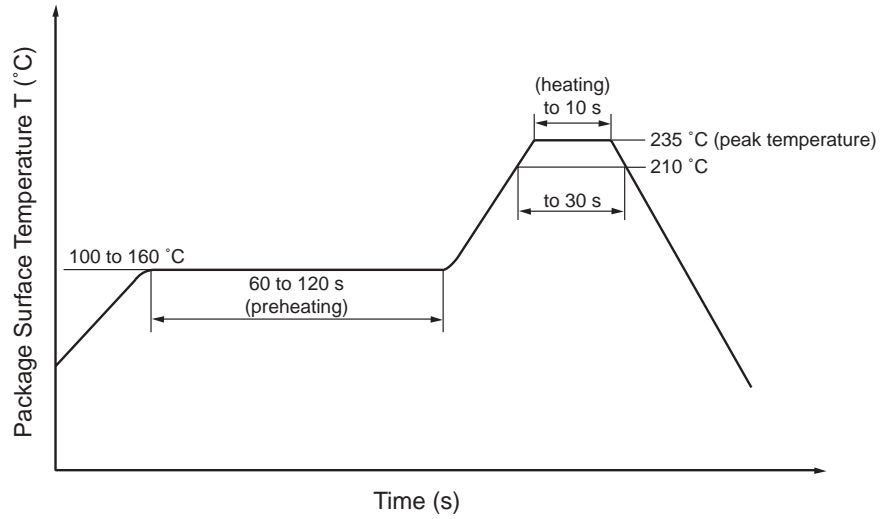


(2) Dip soldering

- Temperature 260 °C or below (molten solder temperature)
- Time 10 seconds or less
- Number of times One
- Flux Rosin flux containing small amount of chlorine
(The flux with a maximum chlorine content of 0.2 Wt % is recommended.)

(3) Cautions

- Fluxes
 - Avoid removing the residual flux with freon-based and chlorine-based cleaning solvent.
 - Avoid shorting between portion of frame and leads.



* : Portion of frame

EXCLUSIVE NORTH AMERICAN AGENT FOR **NEC** RF, MICROWAVE & OPTOELECTRONIC SEMICONDUCTORS

CEL CALIFORNIA EASTERN LABORATORIES • Headquarters • 4590 Patrick Henry Drive • Santa Clara, CA 95054-1817 • (408) 988-3500 • Telex 34-6393 • FAX (408) 988-0279
24-Hour Fax-On-Demand: 800-390-3232 (U.S. and Canada only) • Internet: <http://WWW.CEL.COM>

DATA SUBJECT TO CHANGE WITHOUT NOTICE

8/15/2001