


FEATURES

- Epoxy meets UL-94 V-0 flammability rating
- Complementary to PXT8550
- Power Dissipation of 500mW
- High Stability and High Reliability

SOT-89-3L



MECHANICAL DATA

- Case: SOT-89-3L
- Terminals: Plated solderable per MIL-STD-750, method 2026
- Mounting Position: Any
- Marking: Y1

MAXIMUM RATINGS ($T_A=25^{\circ}\text{C}$ Unless otherwise specified)

Item	Symbol	Unit	Value
Collector-Emitter Voltage	V_{CEO}	V	25
Collector-Base Voltage	V_{CBO}	V	40
Emitter-Base Voltage	V_{EBO}	V	5.0
Collector Current, Continuous	I_C	mA	1500
Power Dissipation	P_D	mW	500
Operation Junction Temperature	T_J	$^{\circ}\text{C}$	-55 to +150
Storage Temperature	T_{STG}	$^{\circ}\text{C}$	-55 to +150
Thermal resistance From junction to ambient	$R_{\theta JA}$	$^{\circ}\text{C}/\text{W}$	250

PXT8050







ELECTRICAL CHARACTERISTICS(T_A=25°C Unless otherwise specified)



Item	Symbol	Unit	Conditions	Min	Max
Collector-Emitter Breakdown Voltage	V _{(BR)CEO}	Vdc	I _C =0.1mA, I _B =0	25	---
Collector-Base Breakdown Voltage	V _{(BR)CBO}	Vdc	I _C =100μA, I _E =0	40	---
Emitter-Base Breakdown Voltage	V _{(BR)EBO}	Vdc	I _E =100μA, I _C =0	5.0	---
Collector cut-off Current	I _{CBO}	nA	V _{CB} =40V, I _E =0	---	100
Collector cut-off Current	I _{CEO}	nA	V _{CE} =20V, I _B =0	---	100
Emitter cut-off Current	I _{EBO}	nA	V _{EB} =5V, I _C =0	---	100
DC Current Gain	h _{FE(1)}		I _C =100mA, V _{CE} =1V	85	400
	h _{FE(2)}		I _C =800mA, V _{CE} =1V	40	---
Collector-Emitter Saturation Voltage	V _{CE(set)}	Vdc	I _C =800mA, I _B =80mA	---	0.5
Base-Emitter Saturation Voltage	V _{BE}	Vdc	I _C =800mA, I _B =80mA	---	1.20
			V _{CE} =1V, I _C =10mA	---	1.0
Output Capacitance	C _{obo}	pF	V _{CB} =10V, f=1.0MHz, I _E =0	---	15
Input Capacitance	C _{ibo}	pF	V _{EB} =0.5V, f=1.0MHz, I _C =0	---	---
Current Gain-Bandwidth Product	f _T	MHZ	I _C =50mA, V _{CE} =10V f=30MHz	100	---
Noise Figure	NF	dB	V _{CE} =5.0V, f=1.0kHz, I _C =100μA, R _S =1.0K	---	---

CLASSIFICATION OF h_{FE(1)}

Rank	B	C	D	D3
Range	85-160	120-200	160-300	300-400


Characteristics(Typical)

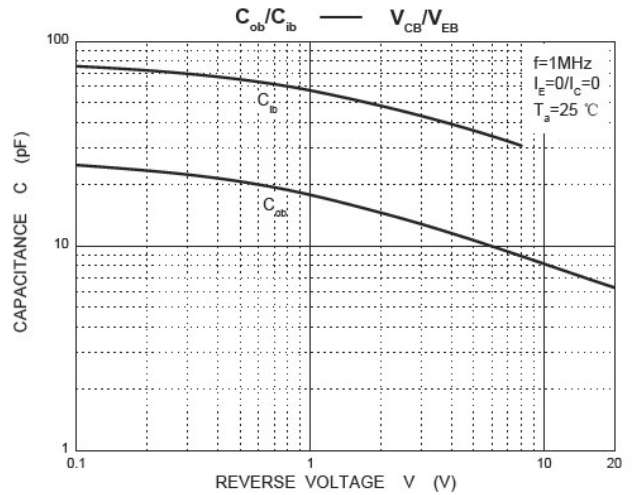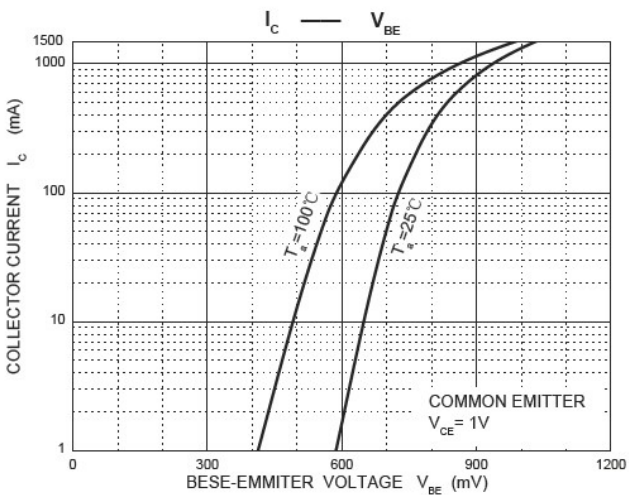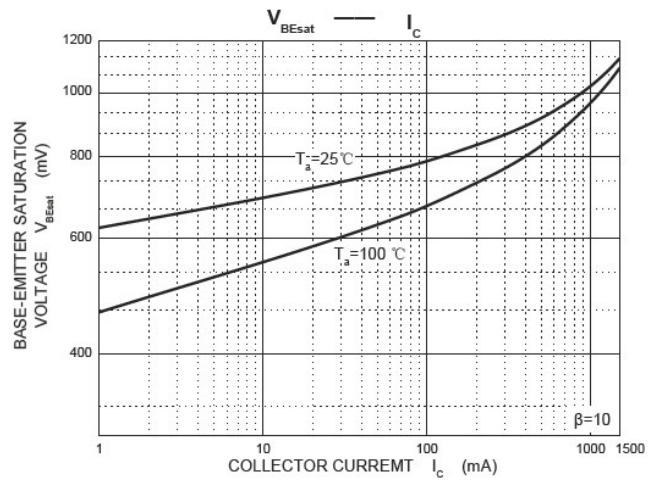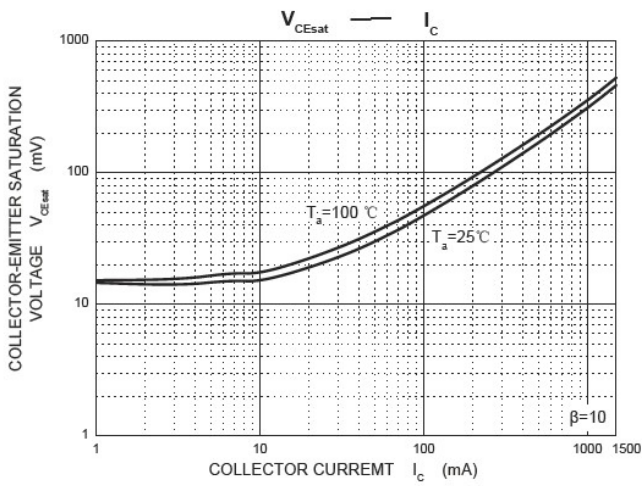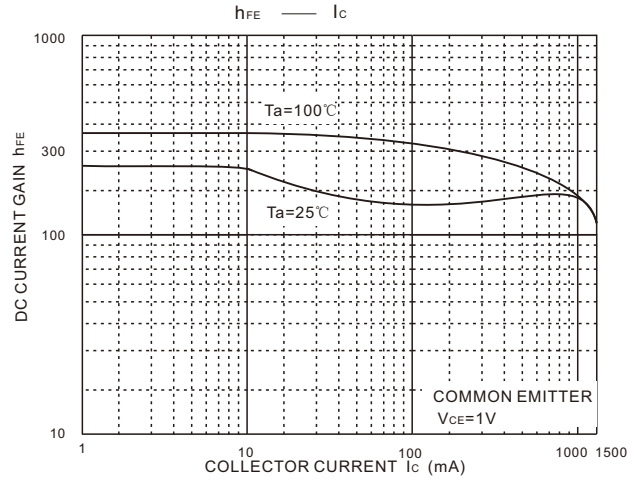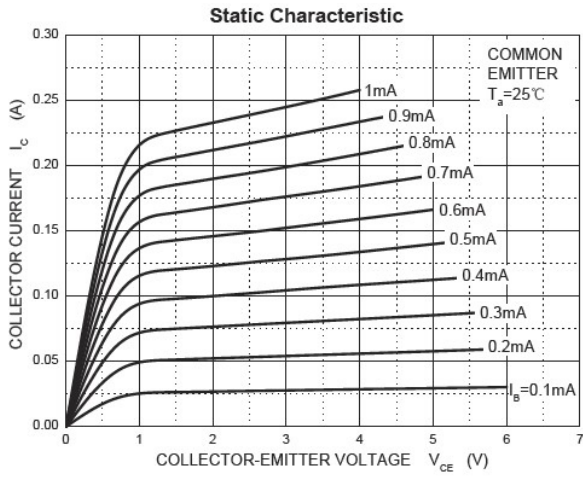

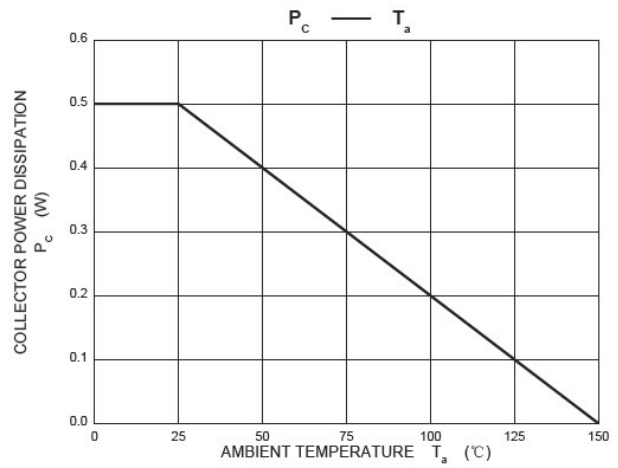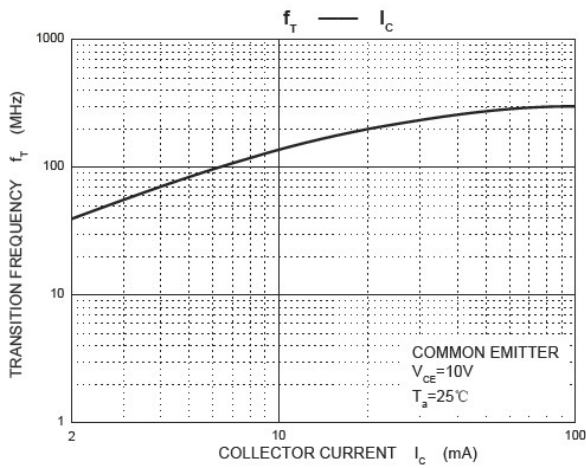


Outline Dimensions

SOT-89-3L

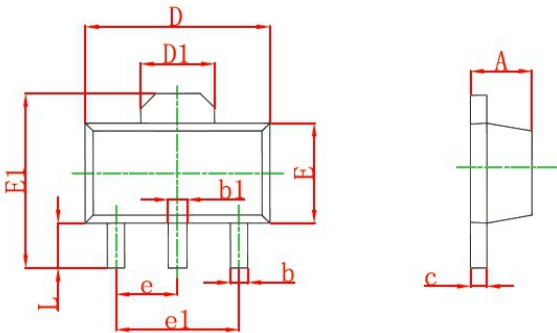

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.400	1.600	0.055	0.063
b	0.320	0.520	0.013	0.020
b1	0.400	0.580	0.016	0.023
c	0.350	0.440	0.014	0.017
D	4.400	4.600	0.173	0.181
D1	1.550 REF.		0.061 REF.	
E	2.300	2.600	0.091	0.102
E1	3.940	4.250	0.155	0.167
e	1.500 TYP.		0.060 TYP.	
e1	3.000 TYP.		0.118 TYP.	
L	0.900	1.200	0.035	0.047

Suggested pad layout

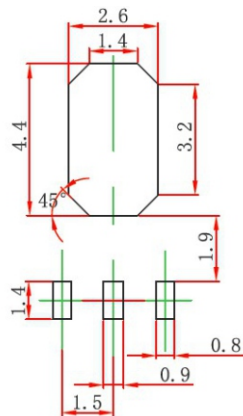

Dimensions in millimeters

Friendship Reminder

■ JiNan JingHeng (hereinafter referred to as JH) reserves the right to make changes to this document and its products and specifications at anytime without notice.

■ Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.

■ JH makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does JH assume any liability for application assistance or customer product design.

■ JH does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.

■ No license is granted by implication or otherwise under any intellectual property rights of JH.

■ JH is products are not authorized for use as critical components in life support devices or systems without express written approval of JH.