



**FEATURES**

- 100 WATTS MAXIMUM OUTPUT POWER
- SINGLE OUTPUT UP TO 30A
- COMPACT 2.28 X 1.45 X 0.50 INCH PACKAGE
- HIGH EFFICIENCY UP TO 90%
- 2:1 WIDE INPUT VOLTAGE RANGE
- FIXED SWITCHING FREQUENCY
- INDUSTRY STANDARD FOOTPRINT
- NO MINIMUM LOAD
- ADJUSTABLE OUTPUT VOLTAGE
- UNDER-VOLTAGE LOCKOUT
- INPUT TO OUTPUT ISOLATION (BASIC INSULATION)
- CE MARK MEETS 2006/95/EC, 93/68/EEC AND 2004/108/EC
- UL60950-1, EN60950-1 AND IEC60950-1 LICENSED
- ISO9001 CERTIFIED MANUFACTURING FACILITIES
- COMPLIANT TO RoHS EU DIRECTIVE 2002/95/EC

**APPLICATIONS**

Wireless Network  
Telecom/Datacom  
Industry Control System  
Distributed Power Architectures  
Semiconductor Equipment

**OPTIONS**

Positive logic Remote on/off, Pin length

**DESCRIPTION**

QEB100 single output DC/DC converters provide up to 100 watts of output power in an industry standard quarter-brick package and footprint. These units are specifically designed to meet the power needs of low-voltage silicon. All models feature a wide input range, trimmable output voltage and a 30A current rating.

**TECHNICAL SPECIFICATION** All specifications are typical at nominal input, full load and 25°C otherwise noted

OUTPUT SPECIFICATIONS		
Output power		100 Watts, max.
Voltage accuracy	Full load and Normal Vin	± 1.5%
Minimum load		0%
Voltage adjustability	(Note 5)	+ 10% , -20%
Line regulation	LL to HL at Full Load	±0.2%
Load regulation	No load to Full Load	See table
Remote Sense	(Note 5)	10% of Vout
Ripple and noise	20MHz bandwidth (Measured with a 1µF M/C and a 10µFT/C)	See table
Temperature coefficient		±0.02% / °C, max.
Transient response recovery time	25% load step change	200µS
Over voltage Protection threshold (Non-latching Hiccup)		120% Vout max.
Over Current Protection threshold		110% ~ 140% of Iout Rated
Short circuit protection		Hiccup, automatics recovery
GENERAL SPECIFICATIONS		
Efficiency		See table
Isolation voltage	Input to Output	1600VDC, min.
	Input to Case	1000VDC, min.
	Output to Case	1000VDC, min.
Isolation resistance		10 <sup>7</sup> ohms, min.
Isolation capacitance		2500 pF, max.
Switching frequency		270 KHz, typ.
Approvals and standard		IEC60950-1, UL60950-1, EN60950-1
Case material		Aluminum base plate
Weight (approx)		42g (1.46 oz)
MTBF (Note 1)	BELLCORE TR-NWT-000332	2.500 x 10 <sup>6</sup> hrs
	MIL-HDBK-217F	6.311 x 10 <sup>5</sup> hrs

INPUT SPECIFICATIONS			
Input voltage range	24V nominal input		18 – 36VDC
	48V nominal input		36 – 75VDC
Input filter			L-C type
Input surge voltage 100mS max	24V nominal input		50VDC
	48V nominal input		100VDC
Start up time	Nominal Vin and constant resistive load	Power up	25mS, typ.
		Remote ON/OFF	25mS, typ.
Start-up voltage	24V nominal input		17VDC
	48V nominal input		34VDC
Shutdown voltage	24V nominal input		15VDC
	48V nominal input		32VDC
Remote ON/OFF (Note 6)			
Negative logic(Standard)	DC-DC	ON	Short or 0V < Vr < 1.2V
	DC-DC	OFF	Open or 3V < Vr < 15V
Positive logic(OPTION)	DC-DC	ON	Open or 3V < Vr < 15V
	DC-DC	OFF	Short or 0V < Vr < 1.2V
Input current of remote control pin	Nominal Vin		-0.5~1.0mA
Remote off state input current	Nominal Vin		2.5mA
ENVIRONMENTAL SPECIFICATIONS			
Operating base-plate temperature range (Note 7)			-40°C to +100°C (with derating)
Over temperature protection			110°C, typ.
Storage temperature range			-55°C to +125°C
Thermal shock			MIL-STD-810F
Vibration			MIL-STD-810F
Humidity , Max , Non-Condensing			95%
EMC CHARACTERISTICS			
EMI (Note 8)	EN55022		Class A
Radiated immunity	EN61000-4-3		10 V/m Perf. Criteria B
Fast transient (Note 9)	EN61000-4-4		± 2KV Perf. Criteria B
Surge (Note 9)	EN61000-4-5		± 1KV Perf. Criteria B
Conducted immunity	EN61000-4-6		10 Vr.m.s Perf. Criteria A




Model Number	Input Range	Output Voltage	Output Current		Output <sup>(4)</sup> Ripple & Noise	Input Current		Eff <sup>(4)</sup> (%)	Load regulation
			Min. load	Full load		No load <sup>(3)</sup>	Full load <sup>(2)</sup>		
QEB100-24S3P3	18 – 36 VDC	3.3 VDC	0mA	25A	100mVp-p	80mA	3997mA	89	10mV
QEB100-24S05	18 – 36 VDC	5 VDC	0mA	20A	100mVp-p	120mA	4845mA	90	15mV
QEB100-24S12	18 – 36 VDC	12 VDC	0mA	8.33A	100mVp-p	130mA	4843mA	90	36mV
QEB100-24S15	18 – 36 VDC	15 VDC	0mA	6.67A	100mVp-p	190mA	4847mA	90	45mV
QEB100-48S1P8	36 – 75 VDC	1.8 VDC	0mA	30A	100mVp-p	70mA	1389mA	85	5.4mV
QEB100-48S2P5	36 – 75 VDC	2.5 VDC	0mA	30A	100mVp-p	70mA	1883mA	87	7.5mV
QEB100-48S3P3	36 – 75 VDC	3.3 VDC	0mA	25A	100mVp-p	75mA	2022mA	89	10mV
QEB100-48S05	36 – 75 VDC	5 VDC	0mA	20A	100mVp-p	80mA	2422mA	90	15mV
QEB100-48S12	36 – 75 VDC	12 VDC	0mA	8.33A	100mVp-p	130mA	2422mA	90	36mV
QEB100-48S15	36 – 75 VDC	15 VDC	0mA	6.67A	100mVp-p	130mA	2424mA	90	45mV


**Note :**

- 1.BELLCORE TR-NWT-000332. Case 1: 80% Stress, Temperature at 40°C.  
MIL-HDBK-217F Notice2 @Ta=25 °C, Full load(Ground, Benign, controlled environment)
- 2.Maximum value at nominal input voltage and full load of standard type.
- 3.Typical value at nominal input voltage and no load.
- 4.Typical value at nominal input voltage and full load.
- 5.Maximum output deviation is 10% inclusive of trim. If remote sense is not being used, the + sense should be connected to its corresponding +OUTPUT and likewise the –sense should be connected to its corresponding –OUTPUT.
- 6.The positive logic and pin length are optional ( see table ). The pin voltage is referenced to –Vin.
- 7.Heat sink is optional and P/N : 7G-0029A-F, 7G-0030A-F, 7G-0031A-F, 7G-0032A-F.
- 8.The QEB100 meets EN55022 class A and class B only with external components connected before the input pin to the converter.
- 9.An external input filter capacitor is required if the module has to meet EN61000-4-4, EN61000-4-5.  
The filter capacitor Power Mate suggest: Nippon chemi-con KY series, 220µF/100V, ESR 48mΩ .
- 10.BASEPLATE GROUNDING : Base-plate should be grounded at one of the four screw bolts prior to operation.
- 11.The converter is provided by basic insulation.



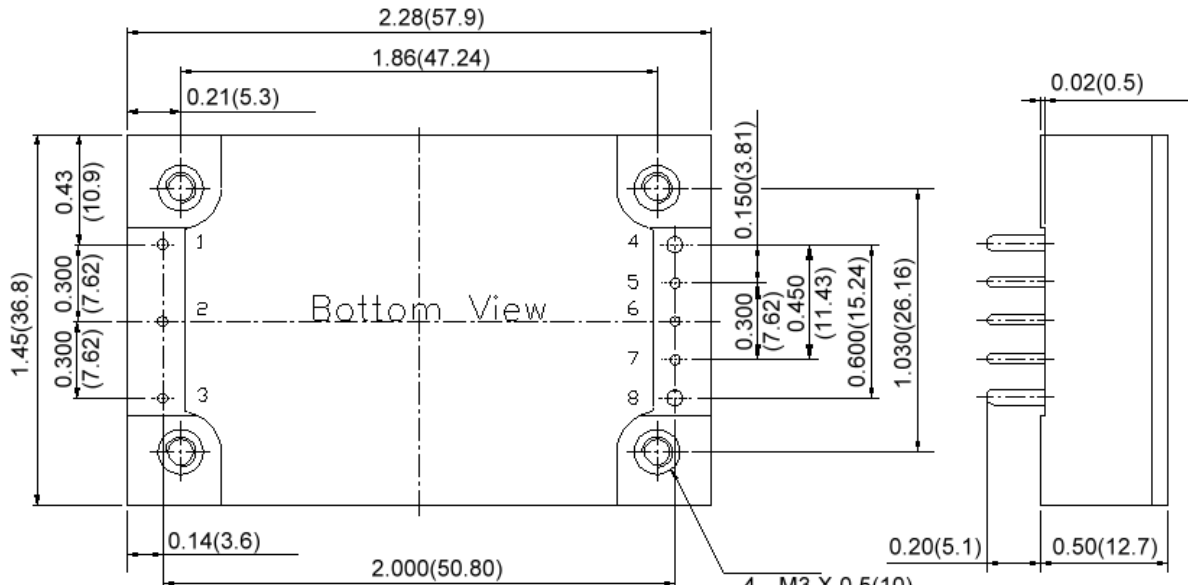

Pin 1,2,3,5,6,7 DIA. 0.040(1.02mm)  
 Pin 4,8 DIA. 0.060(1.52mm)  
 All dimensions in inches(mm)  
 Tolerance: x.xx±0.02(x.xx±0.5)  
 x.xxx±0.01(x.xxx±0.25)  
 Pin pitch tolerance ±0.01(0.25)  
 Pin dimension tolerance ±0.004(0.1)

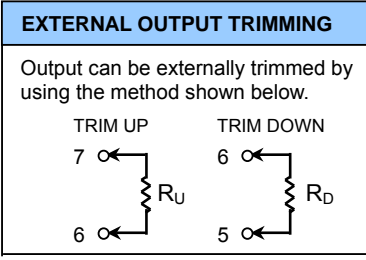






PIN CONNECTION	
PIN	Define
1	- INPUT
2	ON/OFF
3	+ INPUT
4	- OUTPUT
5	- SENSE
6	TRIM
7	+ SENSE
8	+ OUTPUT

PRODUCT OPTIONS TABLE	
Option	Suffix
Negative remote ON/OFF logic, 0.20" pin length (standard)	-
Negative remote ON/OFF logic, 0.145" pin length	-L
Negative remote ON/OFF logic, 0.11" pin length	-K
Positive remote ON/OFF logic, 0.20" pin length	-P
Positive remote ON/OFF logic, 0.145" pin length	-S
Positive remote ON/OFF logic, 0.11" pin length	-M

**Example : QEB100-48S3P3-P**



**100WATTS SINGLE OUTPUT  
DC-DC CONVERTER**

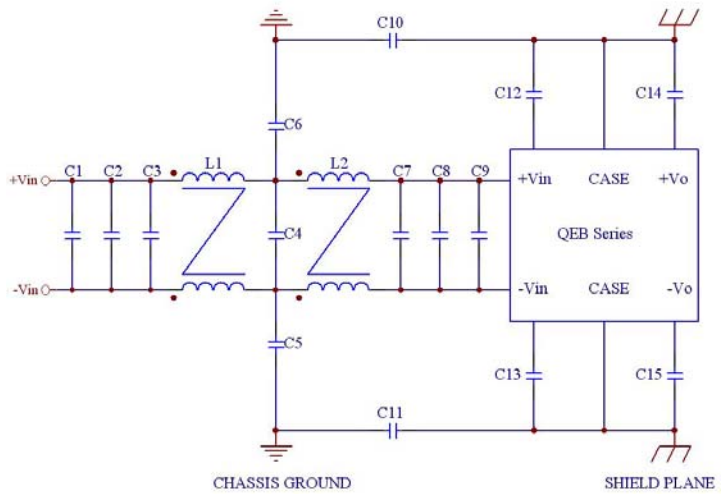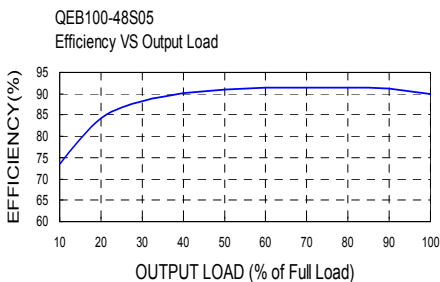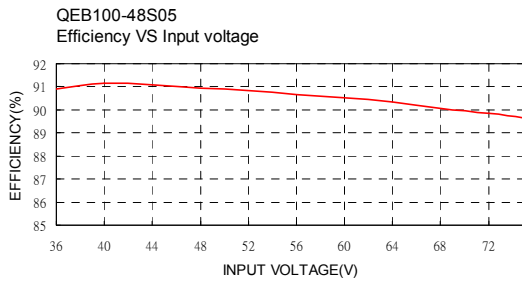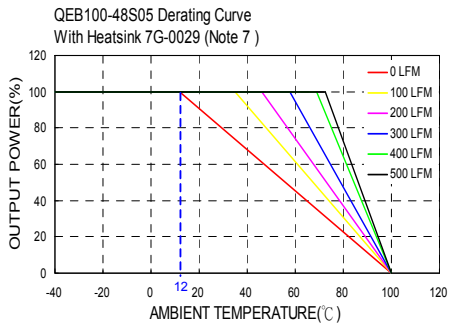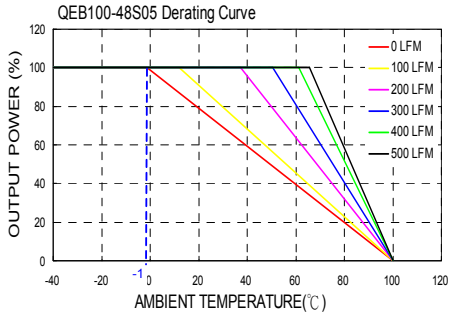


**Recommended Filter for EN55022 Class B Compliance**

The components used in the above figure, together with the manufacturers' part numbers for these components, are as follows:

QEB100-24Sxx	C1	C2	C3	C4	C5
	685pF/50V	685pF/50V	685pF/50V	685pF/50V	1.5nF/3KV
	C6	C7	C8	C9	C10
	1.5nF/3KV	685pF/50V	685pF/50V	685pF/50V	0.1µF/50V
	C11	C12	C13	C14	C15
	0.1µF/50V	1.0nF/3KV	1.0nF/3KV	1.0nF/3KV	1.0nF/3KV
L1	L2				
	1.37mH	1.37mH			

QEB100-48Sxx	C1	C2	C3	C4	C5
	100µF/100V	1.5µF/100V	1.5µF/100V	1.5µF/100V	1.5nF/3KV
	C6	C7	C8	C9	C10
	1.5nF/3KV	47µF/100V	1.5µF/100V	1.5µF/100V	0.1µF/50V
	C11	C12	C13	C14	C15
	0.1µF/50V	1.0nF/3KV	1.0nF/3KV	1.0nF/3KV	1.0nF/3KV
L1	L2				
	620µH	620µH			

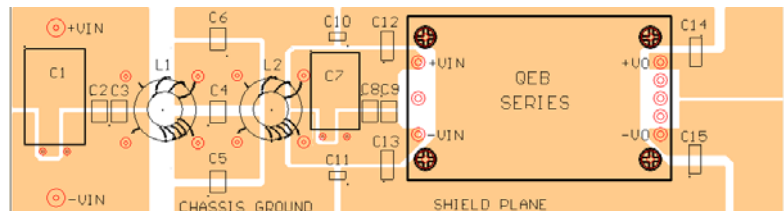

**Recommended EN55022 Class B Filter Circuit Layout**

