


**RB715F**

■ **Features**

- Small mold type. (UMD3)
- High reliability.

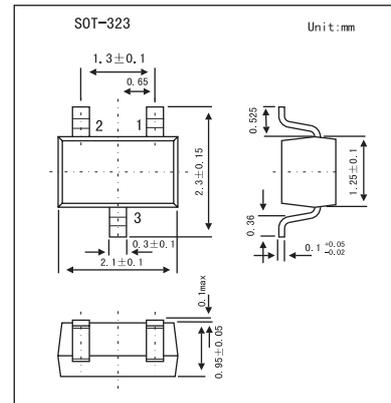

■ **Absolute Maximum Ratings** Ta = 25°C

| Parameter                                 | Symbol           | Limits      | Unit |
|---|------------------|-------------|------|
| Reverse voltage (repetitive peak)         | V <sub>RM</sub>  | 40          | V    |
| Reverse voltage (DC)                      | V <sub>R</sub>   | 40          | V    |
| Average rectified forward current         | I <sub>O</sub>   | 30          | mA   |
| Forward current surge peak (60Hz ·1cyc) * | I <sub>FSM</sub> | 200         | mA   |
| Junction temperature                      | T <sub>j</sub>   | 125         | °C   |
| Storage temperature                       | T <sub>stg</sub> | -40 to +125 | °C   |

\* Rating of per diode

■ **Electrical Characteristics** Ta = 25°C

| Parameter                     | Symbol         | Conditions                      | Min | Typ | Max  | Unit |
|-------------------------------|----------------|---------------------------------|-----|-----|------|------|
| Forward voltage               | V <sub>F</sub> | I <sub>F</sub> = 1 mA           |     |     | 0.37 | V    |
| Reverse current               | I <sub>R</sub> | V <sub>R</sub> = 10 V           |     |     | 1    | μ A  |
| Capacitance between terminals | C <sub>t</sub> | V <sub>R</sub> = 1 V , f = 1MHz |     | 2.0 |      | pF   |

■ **Marking**

|         |    |
|---------|----|
| Marking | 3D |
|---------|----|