



Silicon Bridge Rectifiers

RBV15005--RBV1510

FEATURES

- Rating to 1000V PRV
- Surge overload rating to 200 Amperes peak
- Ideal for printed circuit board
- Reliable low cost construction utilizing molded plastic technique results in inexpensive product
- Lead solderable per MIL-STD-202 method 208



Lead-free

MECHANICAL DATA

- Polarity: Symbols molded on body
- Weight: 0.23 ounces, 6.6 grams
- Mounting position: Any

Maximum Ratings (@TA = 25°C unless otherwise specified)

Characteristic	Symbol	RBV15005	RBV1501	RBV1502	RBV1504	RBV1506	RBV1508	RBV1510	UNITS
Maximum recurrent peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum average forward Output current @T _C =55°C	$I_{F(AV)}$	15.0							A
Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load	I_{FSM}	300							A

Thermal Characteristics

Characteristic	Symbol	RBV15005	RBV1501	RBV1502	RBV1504	RBV1506	RBV1508	RBV1510	UNITS
Typical junction capacitance per element	C_J	85							p F
Typical thermal resistance	$R_{\theta JC}$	1.9							°C/W
Operating junction temperature range	T_J	- 55 ---- + 150							°C
Storage temperature range	T_{STG}	- 55 ---- + 150							°C

Electrical Characteristics (@TA = 25°C unless otherwise specified)


Characteristic	Symbol	RBV15005	RBV1501	RBV1502	RBV1504	RBV1506	RBV1508	RBV1510	UNITS
Maximum instantaneous forward voltage @7.5A	V_F	1.1							V
Maximum reverse current @T _A =25 °C at rated DC blocking voltage @T _A =100°C	I_R	10.0 0.2							μ A mA



Silicon Bridge Rectifiers

RBV15005--RBV1510

PACKAGE OUTLINE DIMENSIONS

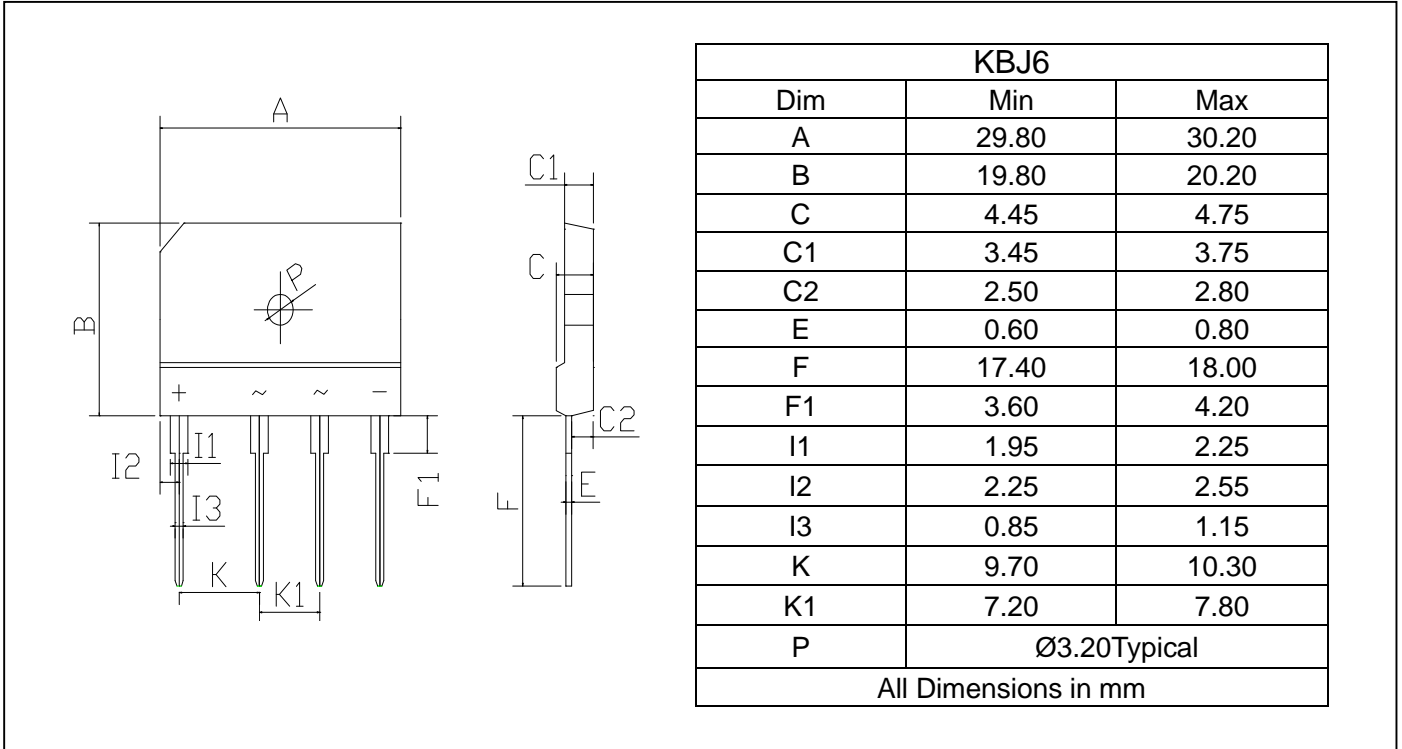

PACKAGE INFORMATION

Device	Package	Shipping
RBV15005--RBV1510	KBJ6	250 Units/Box



Silicon Bridge Rectifiers

RBV15005--RBV1510

FIG.1 – PEAK FORWARD SURGE CURRENT

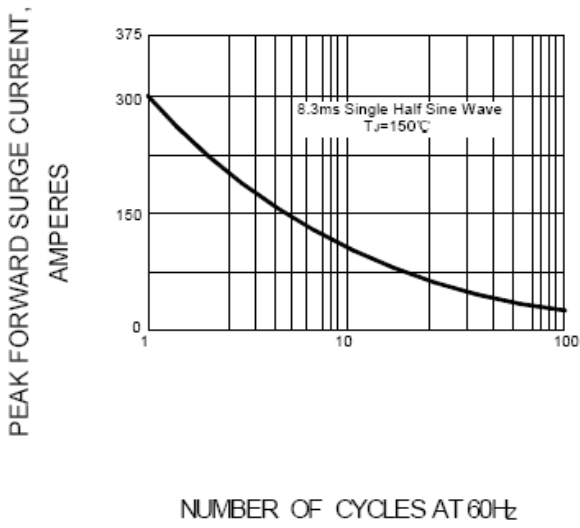


FIG.2 – FORWARD DERATING CURVE

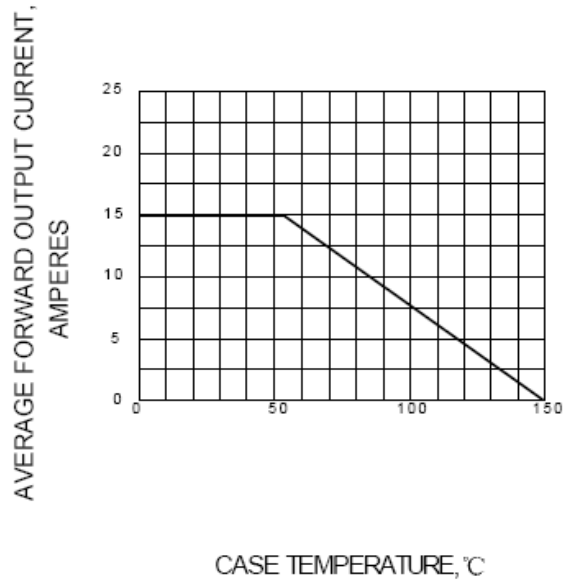


FIG.3 – TYPICAL FORWARD CHARACTERISTIC

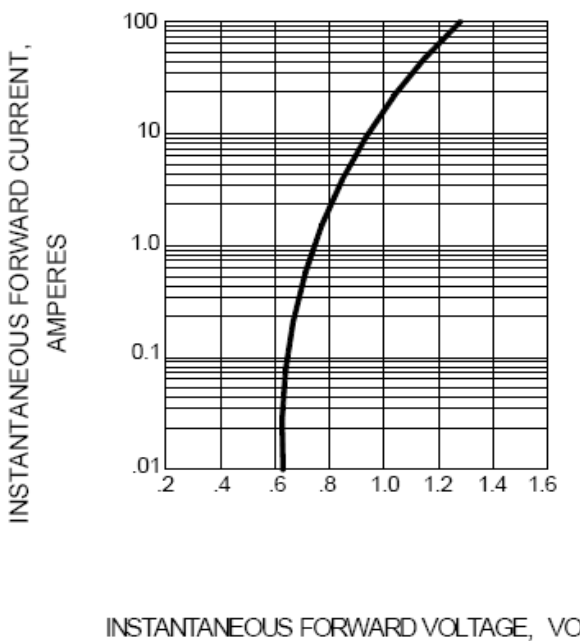


FIG.4 – TYPICAL JUNCTION CAPACITANCE

