



RC12-9

Single-Stage Thermoelectric Cooler
 RoHS and Reach EU Compliant

PERFORMANCE VALUES

Hot Side Temperature (°C)	27°C	50°C
ΔT_{max} (°C-dry N ₂):	65	74
Q _{max} (watts):	78.6	87.2
I _{max} (amps):	8.4	8.4
V _{max} (vdc):	14.1	15.7
AC Resistance (ohms):	1.44	

MECHANICAL CHARACTERISTICS

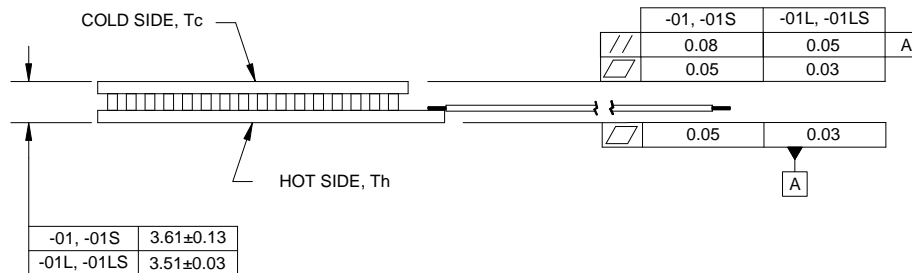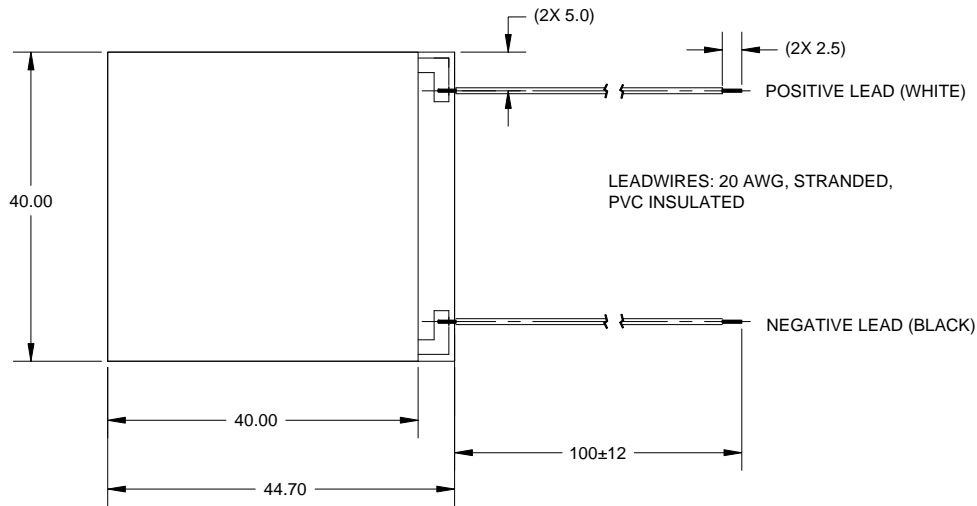

Dimensions are in millimeters

ORDERING OPTIONS


Model Number	Description
RC12-9-01	TEM, Base Model w/ Leads
RC12-9-01L	TEM, Lapped
RC12-9-01S	TEM, Sealed
RC12-9-01LS	TEM, Lapped and Sealed

AVAILABLE MODIFICATIONS


Solid-state reliability.
 Maximum recommended operating temperature is 85°C.
 Maximum processing temperature is 120°C.
 Superior nickel diffusion barriers on elements.
 High strength for rugged environment.
 Porched configuration for enhanced leadwire strength.
 Sealed versions include RTV sealing of the perimeter and leadwire joints.
 Lapped option available for multiple module applications.

ENVIRONMENT: ONE ATMOSPHERE DRY NITROGEN

Hot Side Temperature 27°C

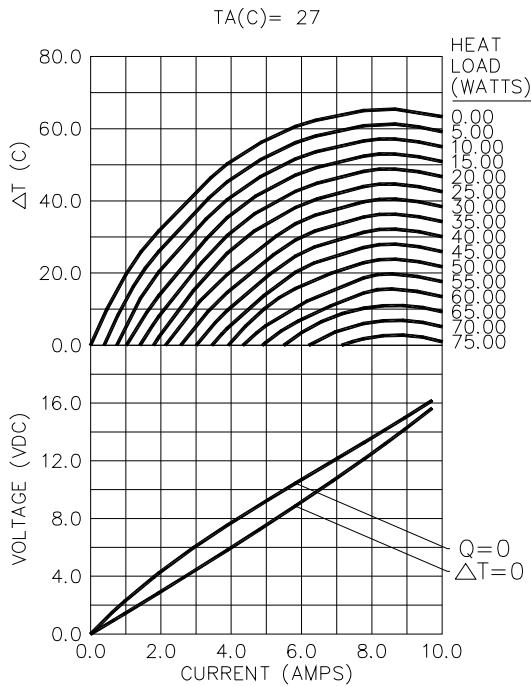

Hot Side Temperature 50°C

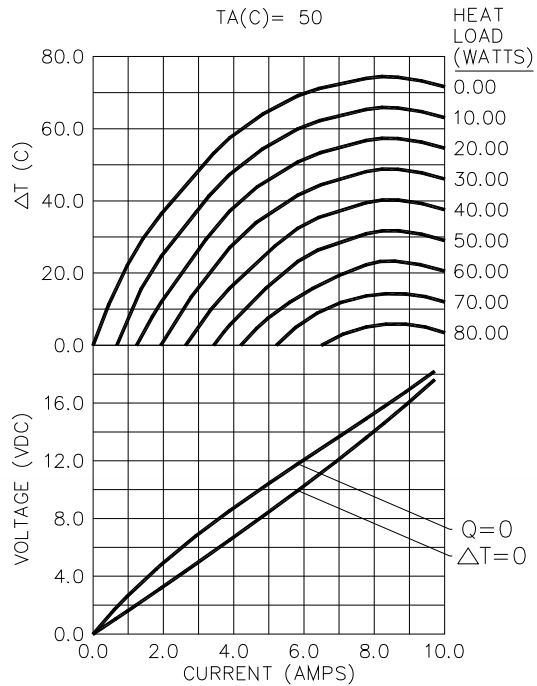

For performance information in a vacuum or with hot side temperatures other than 27°C or 50°C, consult one of our Applications Engineers.

Installation

Recommended mounting methods: Bonding with thermal epoxy or soldering with metallized ceramics. For additional information, please refer to our TEC Installation Guide.

Operation Cautions

For maximum reliability, storage and operation below 85°C in a non-condensing environment is recommended. To minimize thermal stress, use linear/proportional temperature control or a similar method rather than an ON/OFF method.

CONTACT US:

For customer support or general questions please contact a local office below or consult our website for distributor information.

Marlow Industries, Inc.
10451 Vista Park Road
Dallas Texas 75238-1645
214-340-4900 (tel)
214-341-5212 (fax)
www.marlow.com

Marlow Industries Europe GmbH
Brunnenweg 19-31
64331Weiterstadt
Germany
Tel.: +49 (0) 6150 5439- 403
Fax.: +49(0) 6150 5439- 400

II-VI Japan Inc.
WBG Marive East 17F
2-6 Nakase, Mihama-ku
Chiba-Shi, Chiba 261-7117
Japan
81 43 297 2693 (tel)
81 43 297 3003 (fax)
center@ii-vi.co.jp
www.ii-vi.co.jp

II-VI Singapore Pte., Ltd.
Blk. 5012, Techplace II
#04-07 & 05-07/12, Ang Mo Kio Ave. 5
Singapore 569876
(65) 6481 8215 (tel)
(65) 6481 8702 (fax)
info@ii-vi.com.sg
www.ii-vi.com.sg

Marlow Industries China, II-VI
Technologies Beijing
A subsidiary of II-VI Incorporated
Rm 202, 1# Lize 2nd Middle Road
Wangjing, Chaoyang District
Beijing 100102 China
010-64398226 ext 105 (tel)
010-64399315 (fax)
info@iivibj.com